

# Improved Heat Transfer Fluid Helps Sun Drive Steam Power Plants



**INVENTORS • Thatcher Root**

**WARF: P08455US02**

[View U.S. Patent No. 9,010,318 in PDF format.](#)

**The Wisconsin Alumni Research Foundation (WARF) is seeking commercial partners interested in developing a process and system for extending the temperature range of liquid heat transfer.**

## OVERVIEW

Solar power is a renewable energy resource that has generated a lot of interest as an alternative to fossil fuels. Unfortunately, solar photovoltaic panels historically have been proven inefficient in converting sunlight into electrical energy. Recently, interest has grown in generating solar power for use in steam driven power plants. This process involves collecting heat from the sun using thermal panels and using the heat to warm a fluid that is used to produce high-pressure, superheated steam. The steam then can be used to power turbines in power plants. After the heat exchanging fluid has cooled, it is recirculated to the solar panels and the process begins again. To optimize the efficiency of this process, the heat absorption of the heat exchange liquid must be maximized while minimizing loss of heat throughout the system.

The key to improving the efficiency of the system is to use a heat exchanging fluid that does not evaporate or degrade at very high temperatures and also stays liquid at room temperature. Liquids used currently in solar heat collecting devices can be heated to temperatures up to 450 °C under pressure. Higher molecular weight fluids that do not evaporate at over 500 °C have been shown to solidify at relatively high temperatures when cooled. A process and system for liquid heat transfer at temperatures around 500 °C are needed.

## THE INVENTION

UW-Madison researchers have developed a system and method for transferring heat using a variable composition heat transfer fluid that remains liquid over a wide temperature range, up to 500 °C or above. Typically, low molecular weight fluids stay liquid at low temperatures but evaporate quickly at high temperatures, while high molecular weight fluids stay liquid at high temperatures but solidify at lower temperatures. This new system and method utilizes a heat exchanging fluid comprised of a mixture of a high boiling point, high molecular weight fluid (H), and a low freezing point, low molecular weight fluid (L).

## THE WARF ADVANTAGE

Since its founding in 1925 as the patenting and licensing organization for the University of Wisconsin-Madison, WARF has been working with business and industry to transform university research into products that benefit society. WARF intellectual property managers and licensing staff members are leaders in the field of university-based technology transfer. They are familiar with the intricacies of patenting, have worked with researchers in relevant disciplines, understand industries and markets, and have negotiated innovative licensing strategies to meet the individual needs of business clients.



As the combined fluid mixture heats up during the heat exchange process, L evaporates and the vapor is collected in a tank and condensed back into the liquid phase, leaving the heated fluid comprised mostly of H. As the heated H is cooled after heat exchange, the liquid L is added back into the mixture to prevent H from solidifying as it cools. The high boiling point component of the mixture is useful in increasing the boiling point temperature of the heat transfer fluid and lowering the vapor pressure of the heat transfer fluid at high temperatures. The low freezing point component of the mixture is useful in lowering the freezing point temperature of the heat transfer fluid, ensuring that it does not solidify during the temperature cycle.

The system of the invention includes a vessel for containing the heat transfer fluid, a heat source, an outlet for removing some of L as temperature increases during the cycle and an inlet for re-adding L as temperature decreases during the cycle.

## APPLICATIONS

- Steam power plants using solar energy to warm heat exchange fluid

## KEY BENEFITS

- Allows raised operating temperatures, which increases the power cycle efficiency with same amount of solar energy input
- Lacks significant pressure issues because L evaporates as pressure increases when H is heated
- May be configured to utilize a nitrogen blanket to compensate for pressure issues

## ADDITIONAL INFORMATION

### Tech Fields


Clean Technology - Solar technologies

Clean Technology - Energy & resource efficiencies

## CONTACT INFORMATION

For current licensing status, please contact Emily Bauer at [emily@warf.org](mailto:emily@warf.org) or 608-960-9842.

## FIGURES

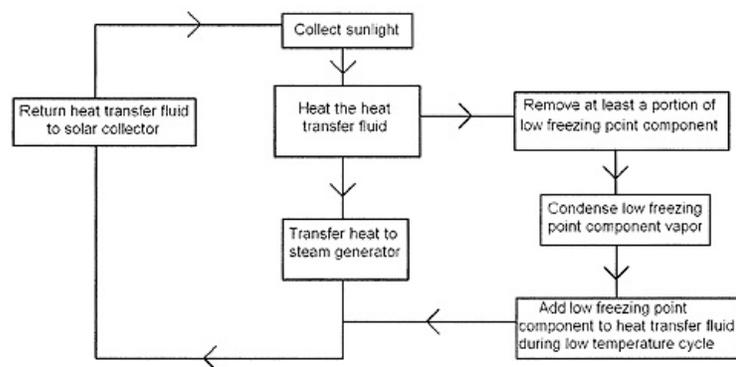

*The heat transfer system involves a variable composition heat transfer fluid. The low freezing point component of the heat transfer fluid is removed and re-added.*