



US006718835B2

(12) **United States Patent**
Wang et al.

(10) **Patent No.:** **US 6,718,835 B2**
(45) **Date of Patent:** **Apr. 13, 2004**

- (54) **PRESSURE PLATE EXTRACTOR**
- (75) Inventors: **Xiaodong Wang**, Madison, WI (US);
Craig Herbert Benson, Verona, WI (US)
- (73) Assignee: **Wisconsin Alumni Research Foundation**, Madison, WI (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.
- (21) Appl. No.: **10/252,285**
- (22) Filed: **Sep. 23, 2002**
- (65) **Prior Publication Data**
US 2003/0066211 A1 Apr. 10, 2003

Website: <http://www.soilmoisture.com/PDF%20Files/extract.pdf>, Pressure Extractors, Soilmoisture Equipment Corp. Catalog, pp. 13–20 and pp. 44–46.

Catalog listing of pressure extractors, Soilmoisture Equipment Corp., Santa Barbara, CA (date unknown).

ASTM D 3152–72 Standard Test Method for Capillary–Moisture Relationships for Fine–Textured Soils by Pressure–membrane Apparatus (Reapproved 2000), pp. 1–6.

ASTM D 2325–68 Standard Test Method for Capillary–Moisture Relationships for Coarse–and Medium–Textured Soils by Porous–Plate Apparatus (Reapproved 2000), pp. 1–6.

Website: http://weather.nmsu.edu/Teaching_Material/soil698/Student_Material/pressureplate/Components.htm Components, Aug. 5, 2002 (2 pages).

* cited by examiner

Related U.S. Application Data

- (60) Provisional application No. 60/328,282, filed on Oct. 10, 2001.
- (51) **Int. Cl.**⁷ **G01N 33/00**
- (52) **U.S. Cl.** **73/866; 73/38; 73/76;**
73/73; 73/866 G
- (58) **Field of Search** **73/38, 76, 866,**
73/73


Primary Examiner—Hezron Williams
Assistant Examiner—Andre K. Jackson
(74) *Attorney, Agent, or Firm*—Craig A. Fieschko, Esq.;
DeWitt Ross & Stevens S.C.



(57) **ABSTRACT**




A pressure plate extractor for testing of soils and other porous solids has a pressure chamber defined by pressure chamber sidewalls resting above a pressure chamber base. A drain plate is situated on the pressure chamber base with its bounding edge surrounded by a seal and situated inwardly from the pressure chamber sidewalls, which rest atop the seal. When the pressure chamber sidewalls are urged towards the pressure chamber base, thereby compressing the seal and preventing air from passing between the pressure chamber sidewalls and pressure chamber base, the seal laterally expands to firmly engage the bounding edge of the drain plate, thereby preventing air from passing between the pressure chamber sidewalls and the drain plate. A substantially leak-free pressure chamber results, with low probability of drain plate failure because the pressure chamber sidewalls do not bear directly upon it.

- (56) **References Cited**
- U.S. PATENT DOCUMENTS**
- 2,534,718 A * 12/1950 Leas et al. 73/38
- 5,161,407 A * 11/1992 Ankeny et al. 73/38
- 6,055,850 A * 5/2000 Turner et al. 73/38
- OTHER PUBLICATIONS**
- Fredlund, D.G. and Rahardjo, H., 1993, Soil Mechanics For Unsaturated Soils, John Wiley & Sons, Inc., pp. 134–135.
- Topp et al., “Soil Water Desorption Curves,” pp. 569–579
- Carter, M. R., Ed., Soil Sampling and Methods of Analysis, Can. Soc. of Soil Science, 1993, pp. 569–579.
- Methods of Soil Analysis. Part I, Physical and Mineralogical Methods, Second Edition, American Society of Agronomy, Madison, Wisconsin, 1986, pp. 635–662.

28 Claims, 2 Drawing Sheets

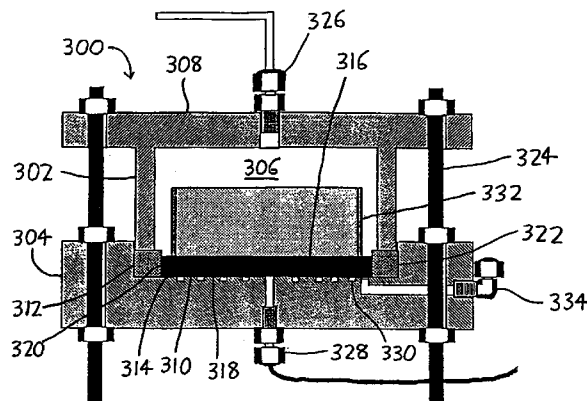

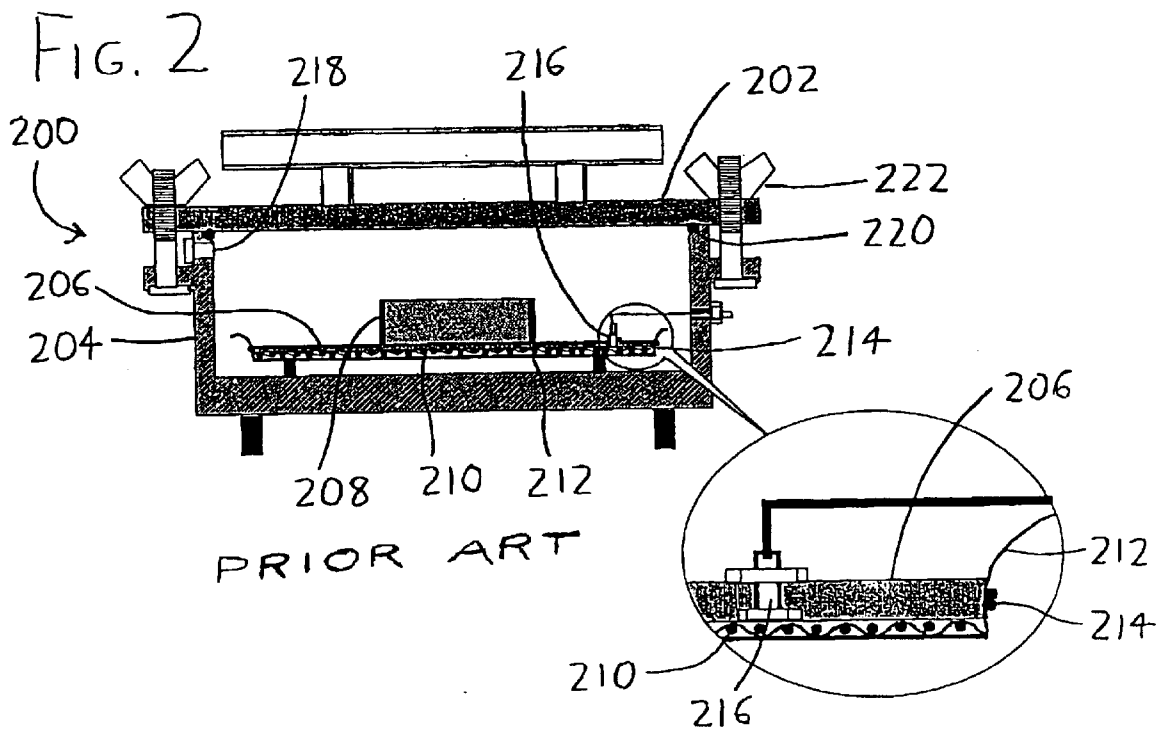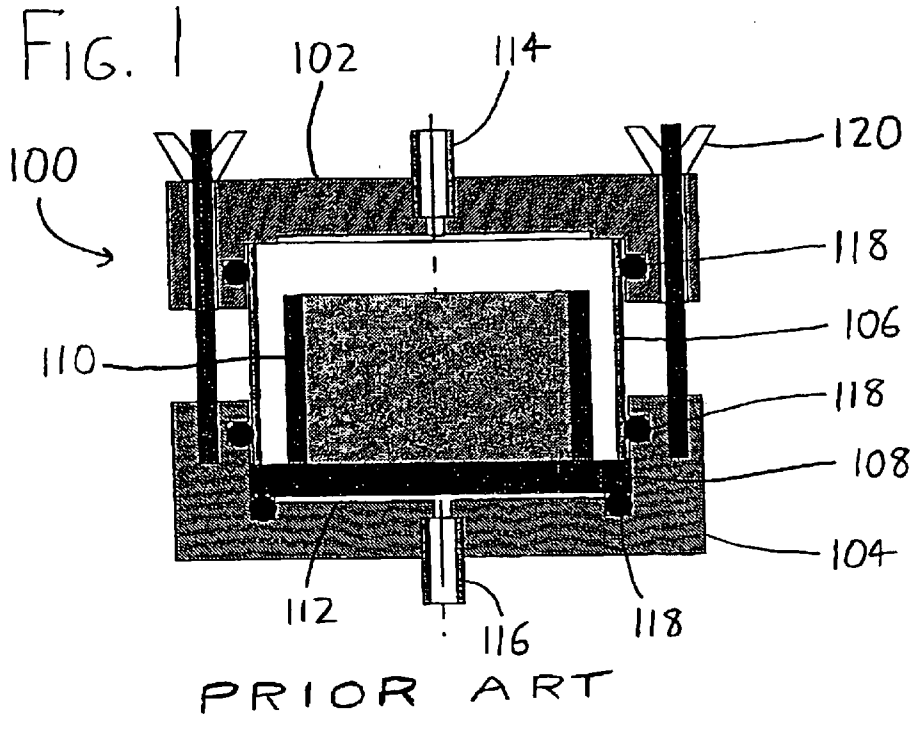

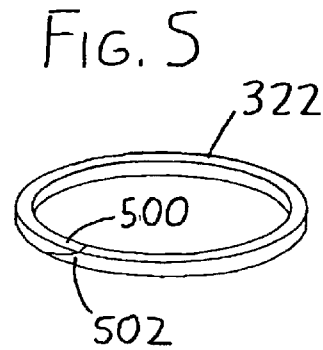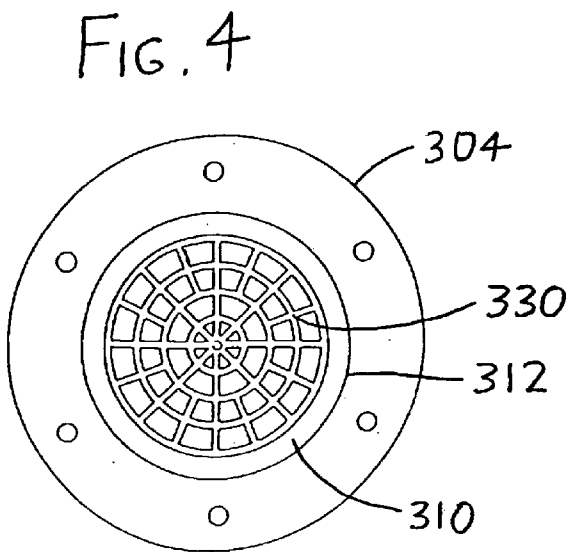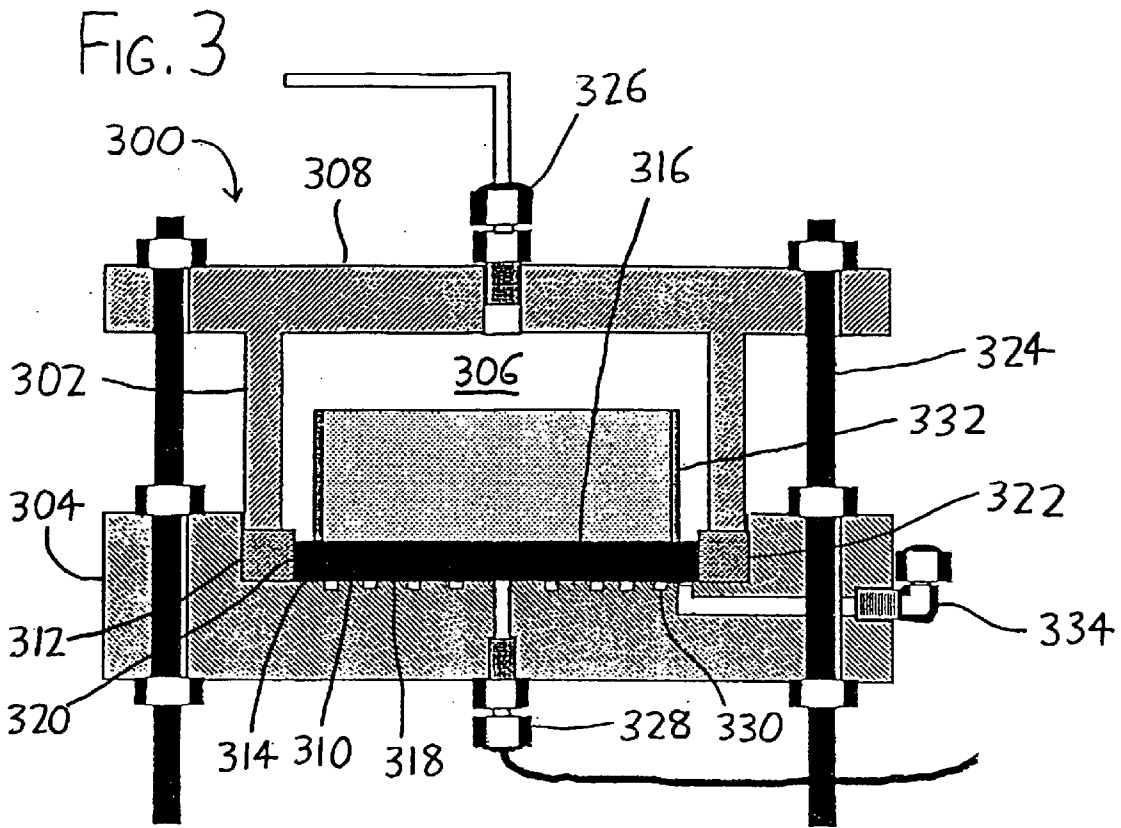

PRESSURE PLATE EXTRACTOR**CROSS-REFERENCE TO RELATED APPLICATIONS**

This application claims priority under 35 USC §119(e) to U.S. Provisional Patent Application No. 60/328,282 filed Oct. 10, 2001, the entirety of which is incorporated by reference herein.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH

This invention was made with United States government support awarded by the United States Environmental Protection Agency pursuant to Grant No. EPA 68-C5-0036, and by the National Science Foundation pursuant to Grant No. NSF 9800255. The United States has certain rights in this invention.

FIELD OF THE INVENTION

This disclosure concerns an invention relating generally to pressure plate extractors for soil testing, and more specifically to pressure plate extractors intended for leak-free operation.

BACKGROUND OF THE INVENTION

The soil water characteristic curve (SWCC), a parameter which relates suction (matric, total, or both) to water content or saturation, is essential for characterizing the hydraulic and mechanical behavior of unsaturated soils. The method used to measure the SWCC depends on the texture of the soil (coarse vs. fine) and the magnitude of the suctions that must be established. For finer textured soils (silts, clays, and silty or clayey sands), a pressure plate extractor is normally used. A pressure plate extractor generally includes two key components, a pressure chamber (also referred to as a pressure cell) which allows pressurization of its interior, and a porous drain plate which rests within the pressure chamber in communication with soil to be tested, and which receives water or other liquids from the soil during pressurization. The drain plate is usually a ceramic disk, although polymeric membranes are used when very high suctions (>1500 kPa or 150 m of water) are being applied. The structure and operation of pressure plate extractors is better understood with review of common configurations of prior extractors.

FIG. 1 illustrates an exemplary pressure plate extractor **100** (commonly referred to as a "Tempe cell") used for applications where lower suctions (<100 kPa or 10 m of water) are to be applied. The pressure chamber is defined by a lid **102**, a base **104**, and a cylindrical sidewall **106** (wherein the lid **102** and base **104** are also provided in cylindrical forms between which the sidewall **106** may be fit). A porous drain plate **108** is provided on the base **104** to receive water or other liquid from a soil sample provided atop the drain plate **108** in a retaining ring **110**. The base **104** has a recess **112** wherein the liquid may be received. A pressure inlet **114** is provided in the lid **102** for connection to a compressed air cylinder or other pressure source, and a drain outlet **116** is provided in the base **104** to receive water or other liquid expelled from the soil sample into the drain plate **108** during pressurization. O-ring seals **118** are provided between the pressure chamber sidewall **106** and the lid **102** and base **104**, and also between the drain plate **108** and base **104**. A nut-screw arrangement **120** is provided whereby the lid **102** may be urged against the sidewall **106**, which in turn urges against the drain plate **108** and base **104**, to close the pressure chamber for pressurization.

When testing at higher pressures is desired, a pressure plate extractor having a more robust pressure chamber is generally used, with an exemplary arrangement being illustrated in FIG. 2. Here, the pressure plate extractor **200** has a pressure chamber defined by a lid **202** and a combined base and cylindrical sidewall **204**. A porous drain plate **206** receives water or other liquid from a soil sample provided in a retaining ring **208**. A metal screen **210** is situated at the bottom of the drain plate **206**, and the screen **210** and the bottom of the drain plate **206** are then enclosed (with the screen **210** held to the bottom of the drain plate **206**) by a rubber membrane **212** which is clamped about the edges of the drain plate **206** by a wire wrapping **214**. A drain outlet tube **216** then extends from the exterior of the sidewall **204** to the space between the bottom of the drain plate **206** and the rubber membrane **212**. A pressure inlet **218** extends through the sidewall **204**, and O-ring seals **220** are provided between the lid **202** and sidewall **204** to deter depressurization of the pressure chamber. A nut-screw arrangement **222** is provided to urge the lid **202** against the sidewall **204** to close the pressure chamber for pressurization.

When using the foregoing extractors **100** and **200**, the air pressure inside the pressure chamber is elevated via pressure inlets **114** and **218**, and atmospheric pressure is generally maintained at the drain outlets **116** and **216** (and thus on the sides of the drain plates **108** and **206** in fluid communication with the drain outlets **116** and **216**). Drying SWCC can be measured by first saturating the soil sample, and then applying a series of different pressure differentials (often referred to as "suctions," since water is pulled from the soil sample owing to lower pressure at the drain outlets **116/216**) between pressure inlets **114/218** and drain outlet **116/216**. Different amounts of water are expelled at different pressure differentials, and the expelled water is measured (gravimetrically or volumetrically) at each suction to define the SWCC.

Although the operating principles of the pressure plate extractors **100** and **200** are conceptually simple, mechanical problems are common, with air leakage being a particular problem. Leakage is highly undesirable because it can invalidate the test results, and since a test to determine SWCC of a sample can take from two weeks to several months to run, an invalid test run can result in significant loss of time and money (and can significantly delay projects wherein the SWCC is needed to proceed). In extractors such as extractor **100**, leakage is most prevalent at the outer edge or the bottom of the drain plate **108** from air bypassing the adjacent O-ring seal **118**. A common solution is to glue the drain plate **108** in place on the base **104** using epoxy or another adhesive applied around the edge of the drain plate **108**, but because the adhesive bond is permanent, the drain plate **108** usually cannot be removed for later cleaning, test preparation, etc. without damage. Also, the rigid connection caused by the epoxy between the drain plate **108** and the base **104** can lead to cracking of the drain plate **108** owing to the pressure differential between the recess **112** and the interior of the pressure chamber, and owing to loading of the drain plate **108** by the sidewall **106** when the sidewall **106** is urged towards the base **104** to seal the pressure chamber. These problems lead to an unfortunate tradeoff: the lid **102** must be tightly clamped to the base **104** to deter leaks, but this is more likely to crack the drain plate **108** (and conversely, air leaks may result if stress on the drain plate **108** is relieved in order to avoid damage). As a result, some degree of leakage always occurs and must be tolerated, though it degrades the quality of the SWCC test results.

The extractor **200** encounters similar problems in that air leakage occurs between the drain plate **206** and the rubber

membrane **212** owing to poor sealing by the wire wrapping **214** or other sealing arrangement. Decreases in test accuracy from leakage of the extractor **200** are particularly unfortunate since test data from the extractor **200** are inherently not as precise as for the extractor **100**, owing to the relatively small size of the soil sample used in the extractor **200**, and also owing to inefficiencies in collecting expelled water in the extractor **200**. These collection inefficiencies primarily arise from difficulties in collecting all water from the screen **201** and membrane **212**, and air diffusion through the drain plate **206** interfering with measurements.

Additionally, both of the extractors **100** and **200** depicted in FIGS. **1** and **2** have limited sealing capacity between their lids, sidewalls, bases, and drain plates, since their seals **118/220** are set within recesses and can only be compressed to a limited extent. If the seals **118/220** grow less flexible over time (as is common), they may fail to provide the necessary degree of sealing regardless of how far their lids and sidewalls are urged towards their bases.

Owing to the importance of accurate SWCC measurements to civil and environmental engineering projects, and the cost and time involved in obtaining accurate SWCC measurements, there is a substantial need for improvements in pressure plate extractor apparatus which overcome the foregoing problems.

SUMMARY OF THE INVENTION

The invention involves a pressure plate extractor which is intended to at least partially solve some of the aforementioned problems. To give the reader a basic understanding of some of the advantageous features of the invention, following is a brief summary of preferred versions of the extractor. As this is merely a summary, it should be understood that more details regarding the preferred versions may be found in the Detailed Description set forth elsewhere in this document. The claims set forth at the end of this document then define the various versions of the invention in which exclusive rights are secured.

A preferred version of a pressure plate extractor constructed in accordance with the invention includes a pressure chamber defined within a pressure chamber base and pressure chamber sidewalls (which may have a pressure chamber lid separately or integrally provided thereon). A drain plate sized to fit on the pressure chamber base is provided within the pressure chamber. A pressure inlet is provided, preferably on the pressure chamber sidewalls and/or pressure chamber lid, to allow pressurization of the pressure chamber. Similarly, a drain outlet for receiving expelled water or other liquid from the drain plate is provided on the pressure chamber base. The drain plate has opposing plate inner and outer faces bounded by a plate intermediate edge, with the plate inner face being situated adjacent the interior of the pressure chamber and the plate outer face being situated outside the pressure chamber interior. The drain plate preferably rests within a depression defined in the pressure chamber base, with the plate intermediate edge being spaced inwardly from the outer walls of the depression.

The pressure chamber sidewalls are preferably sized to extend about the entirety of the drain plate's perimeter, as opposed to being sized to fit atop the drain plate as in the prior pressure plate extractors shown in FIGS. **1** and **2**. Thus, if the pressure chamber sidewalls are urged towards the pressure chamber base, they need not bear against the drain plate and stress it, as in the prior pressure plate extractors.

A sealing arrangement is then provided which is believed to offer significant advantages over the prior pressure plate

extractor arrangements of FIGS. **1** and **2**. A seal, which is preferably formed of an elastomeric strip or ring, is fit about the intermediate edge of the drain plate, and between the drain plate's intermediate edge and the outer walls of the depression formed in the pressure chamber base. The pressure chamber sidewalls are then fit atop the seal between the drain plate and the depression outer walls, and they bear downwardly against the seal to press the seal against the pressure chamber base. This deforms the seal, causing it to expand laterally to tightly engage the drain plate and depression outer walls in the pressure chamber base. As a result, the seal is engaged between all of the pressure chamber sidewalls, the drain plate, and the pressure chamber base. The greater the force used to urge the pressure chamber sidewalls toward the pressure chamber base, the tighter the seal between the sidewalls and base (and between the sidewalls and drain plate), and the tighter the resulting seal between the drain plate and the pressure chamber base. At the same time, the pressure chamber sidewalls do not bear against the drain plate, thereby diminishing the likelihood that the drain plate will fracture. A substantially leak-free pressure chamber with low probability of drain plate failure results.

Advantageously, a pressure plate extractor of this nature is suitable for use at high pressures as well as low pressures, and thus can serve as a replacement for both of the extractors depicted in FIGS. **1** and **2**. It can provide substantially higher measurement accuracy than the prior high-pressure extractor arrangements because it does not require use of an inefficient mesh-and-membrane arrangement to collect expelled liquids.

Further advantages, features, and objects of the invention will be apparent from the following detailed description of the invention in conjunction with the associated drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. **1** is a side elevational view of a cross-section of a prior known pressure plate extractor arrangement used for testing at lower pressures.

FIG. **2** is a side elevational view of a cross-section of a prior known pressure plate extractor arrangement used for testing at a greater range of pressures, including higher pressures.

FIG. **3** is a side elevational view of a cross-section of one version of a pressure plate extractor which exemplifies some of the features of the invention, and which may be used for testing at both low and high pressures.

FIG. **4** is a top plan view of an exemplary preferred version of the pressure chamber base **304** of the pressure plate extractor **300** of FIG. **3**.

FIG. **5** is a perspective view of an exemplary preferred version of the seal **322** of the pressure plate extractor **300** of FIG. **3**.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS OF THE INVENTION

Referring to FIG. **3**, and exemplary version of a pressure plate extractor which implements features of the invention is designated generally by the reference numeral **300**. The extractor **300** includes a pressure chamber sidewall **302** and a pressure chamber base **304** which combine to define the pressure chamber **306** of the extractor **300**. The pressure chamber sidewall **302** preferably has a generally cylindrical configuration, and also preferably includes an integrally joined pressure chamber lid **308**. The pressure chamber base

304 includes a depression floor **310** and depression outer walls **312** which define a depression in the pressure chamber base **304**, with the depression outer walls **312** being configured to closely receive the pressure chamber sidewall **302** within the pressure chamber base **304**. The pressure chamber sidewall **302** and pressure chamber base **304** are preferably formed of brass owing to machinability, cost, and corrosion resistance, though numerous other materials (or combinations thereof) could be used instead.

A drain plate **314** is sized to fit within the pressure chamber base **304** on the depression floor **310**. The drain plate **314**, which may be made of conventional ceramic, polymeric, or other porous materials in accordance with test requirements, includes an inner surface **316** facing the interior of the pressure chamber **306**, an outer surface **318** which rests atop the depression floor **310**, and an intermediate edge **320** which is spaced inwardly from the depression outer walls **312**. The drain plate **314** is sized such that if the pressure chamber sidewall **302** is placed over it, the drain plate intermediate edge **320** can fit entirely within the pressure chamber sidewall **302** (though preferably such spacing is close), rather than being sized so that the pressure chamber sidewall **302** may only fit atop the inner surface **316** of the drain plate **314**.

A seal **322** is fit about the intermediate edge **320** of the drain plate **314** so that the seal **322** rests between the pressure chamber sidewall **302** and the pressure chamber base **304**, and also between the drain plate intermediate edge **320** and the depression outer walls **312** formed in the pressure chamber base **304**. The seal **322** is preferably formed of elastomeric or other compressible material, with corrosion-resistant elastomers capable of withstanding organic solvents (such as perbunan/Buna-N) being particularly preferred. As is conventional with most elastomers, the seal **322** has a positive Poisson's ratio, i.e., compression of the material along one axis causes expansion along perpendicular axes. When the pressure chamber sidewall **302** is urged towards the pressure chamber base **304**, as by use of the nut/screw arrangement shown at **324**, the seal **322** will seal the depression chamber sidewall **302** with respect to the pressure chamber base **304**. As a result of the positive Poisson's ratio of the seal **322**, the compression of the seal **322** between the pressure chamber sidewall **302** and the pressure chamber base **304** causes it to laterally (radially) expand to tightly seal the drain plate intermediate edge **320** with respect to the pressure chamber base **304** at the depression outer walls **312**. As a result, the seal **322** is tightly engaged between all of the pressure chamber sidewall **302**, the drain plate **314**, and the pressure chamber base **304**.

The use of the foregoing arrangement avoids the noted disadvantage of the prior pressure plate extractor **100** of FIG. 1 that urging the pressure chamber sidewall **106** and the pressure chamber base **104** towards each other, thereby tightening the seal between them, increases the likelihood that the drain plate **108** will be stressed to the point of failure. The pressure chamber sidewall **302** does not bear against the drain plate **314** and is therefore unlikely to fracture it. Additionally, owing to exploitation of the Poisson's ratio effect from compression of the seal **322**, urging the pressure chamber sidewall **302** against the seal **322** and pressure chamber base **304** only serves to make the pressure chamber **306** more airtight, even if the seal **322** has begun to lose flexibility owing to aging.

As in the prior pressure plate extractor **100**, pressurization may be provided by connecting a compressed air cylinder or other pressure supply to a pressure inlet **326**, which is preferably centrally situated on the pressure chamber lid **308**

for convenient access. Additionally, a drain outlet **328** is provided in the pressure chamber base **304** adjacent the drain plate outer surface **318** (i.e., on the side of the drain plate **314** opposite the interior of the pressure chamber **306**) to receive expelled liquid, and the drain outlet **328** is preferably centrally situated beneath the drain plate **314** to better receive water equally from all sides of the drain plate **314**. Rather than situating an enlarged recess beneath the drain plate **314** to receive expelled liquid (as with the recess **112** beneath the drain plate **108** in FIG. 1), it is preferred to define a network of collecting channels **330** in the depression floor **310** of the pressure chamber base **304** so that more of the area of the drain plate outer surface **318** is supported during pressurization. While the collecting channels **330** may be provided in a variety of patterns, a preferred arrangement is to use the "spider web" pattern depicted in the top view of the pressure chamber base **304** depicted in FIG. 4, or to use some other pattern which efficiently collects water expelled from all areas of the drain plate **314** while supporting most of its area. A retaining ring **332** for holding soil to be tested is also provided, and it may take any conventional or desired form.

The seal **322** could take the form of a conventional O-ring having a circular cross-section, but it is preferably provided in the form of a loop which has a square or rectangular cross-section (or is provided by a strip having a square or rectangular cross-section, wherein the strip may be formed into a loop). The square or rectangular cross-section is preferred because it is desirable to have the seal **322** abut the surfaces it engages—the sidewall **302**, the depression floor **310**, the drain plate intermediate edge **320**, and the depression outer walls **312**—in plane-to-plane contact, i.e., so that the surfaces of the seal **322** evenly and complementarily contact the surfaces to which they are to engage. An advantage of using a seal **322** formed in this manner is that the seals **322** may be more easily and cheaply replaced than standard O-ring seals; a user may simply take an elongated bar of elastomeric material, cut the bar to such a length that the bar may fit about the drain plate intermediate edge **320** with a slight overlap, and then cut the overlapping sections into complementary mating shapes so that they tightly seal together when compressed. To illustrate, the seal **322** is shown in greater detail in FIG. 5, wherein the seal **322** is formed of a rectangular bar having its ends **500** and **502** chamfered to complementarily overlap. The prior pressure plate extractors **100** and **200** often gave rise to costs from frequent replacement of their seals **118** and **220** (owing to a desire to ensure seal integrity), and this cost is largely avoided in the extractor **300** owing to the efficient sealing arrangement and the ability to use standard bar stock or elongated scrap for a seal **322**.

It is understood that the various preferred versions of the invention are shown and described above to illustrate different possible features of the invention and the varying ways in which these features may be combined. Apart from combining the different features of the foregoing versions in varying ways, other modifications are also considered to be within the scope of the invention. Following is an exemplary list of such modifications.

First, it should be understood that unless otherwise required by the claims, components described as being integrally formed may instead be formed separately, and vice versa; for example, the lid **308**, rather than being joined to the pressure chamber sidewall **302**, might instead be separately provided (as in the pressure plate extractor **100** discussed previously). Additionally, components might be located or arranged differently from the manner previously

7

described. For example, while the pressure inlet **326** is shown as being centrally situated on the pressure chamber lid **308**, it might be situated elsewhere on the pressure chamber lid **308** or pressure chamber sidewall **302** if desired.

Second, the extractor **300** may include additional features not discussed above. As an example, a conduit **334** allowing removal of accumulated gas, or allowing insertion of measurement apparatus, may be provided (with FIG. 3 illustrating such a conduit in the base **304**, though it could be included elsewhere). Additionally, if desired, the pressure chamber lid **308** (or another portion of the pressure chamber **306**) can be provided with an overburden piston which extends to the exterior of the pressure chamber **306**. The overburden piston may be actuated so that its head is moved to bear on a soil sample within the pressure chamber **306**, thereby allowing compression of the soil sample during testing or at other times.

The invention is not intended to be limited to the preferred versions of the invention described above, but rather is intended to be limited only by the claims set out below. Thus, the invention encompasses all different versions that fall literally or equivalently within the scope of these claims.

What is claimed is:

1. A pressure plate extractor comprising:
 - a. a pressure chamber base having a depression formed therein, the depression having a depression outer wall;
 - b. a drain plate sized to fit within the depression;
 - c. a pressure chamber sidewall sized to fit on the pressure chamber base about the drain plate;
 - d. a seal engaged:
 - (1) between the pressure chamber sidewall and the pressure chamber base, and
 - (2) between the drain plate and the depression outer wall of the pressure chamber base,
 such that when the pressure chamber sidewall is urged toward the pressure chamber base, the seal is compressed therebetween, and thereby expands between the depression outer wall and the drain plate.
2. The pressure plate extractor of claim 1 wherein:
 - a. the drain plate includes:
 - i. a plate inner face adjacent a pressure chamber interior,
 - ii. an opposing plate outer face outside the pressure chamber interior, and
 - iii. a plate intermediate edge; and
 - b. the plate intermediate edge is surrounded by the pressure chamber base.
3. The pressure plate extractor of claim 1 wherein the seal rests within the depression defined in the pressure chamber base.
4. The pressure plate extractor of claim 1 wherein:
 - a. the drain plate has opposing plate inner and outer faces bounded by a plate intermediate edge, and
 - b. the seal is engaged between the pressure chamber sidewall and the plate intermediate edge.
5. The pressure plate extractor of claim 1 wherein the drain plate includes:
 - a. a plate inner face adjacent a pressure chamber interior, wherein the entirety of the plate inner face is surrounded by the pressure chamber sidewall,
 - b. an opposing plate outer face outside the pressure chamber interior, and
 - c. a plate intermediate edge situated between the plate inner and outer faces, wherein the seal surrounds the plate intermediate edge.

8

6. The pressure plate extractor of claim 1 wherein
 - a. the drain plate has opposing plate inner and outer faces bounded by a plate intermediate edge, the plate inner face being situated adjacent a pressure chamber interior and the plate outer face being situated outside the pressure chamber interior; and
 - b. the pressure chamber sidewall extends about the entirety of the plate inner face.
7. The pressure plate extractor of claim 1 wherein the seal has a first set of opposing planar faces which respectively about the pressure chamber sidewall and pressure chamber base.
8. The pressure plate extractor of claim 7 wherein the seal also has a second set of opposing planar faces which respectively about the pressure chamber sidewall and drain plate.
9. The pressure plate extractor of claim 1 wherein the seal is formed of a strip of elastomeric material with its ends situated in abutment.
10. A pressure plate extractor comprising:
 - a. a pressure chamber base having a depression defined therein, the depression being bounded by depression outer walls;
 - b. a drain plate fit within the depression;
 - c. a seal fit between the drain plate and the depression outer walls, the seal being deformable to tightly engage the drain plate and depression outer walls.
11. The pressure plate extractor of claim 10 further comprising a pressure chamber sidewall fit atop the seal between the drain plate and the depression outer walls.
12. The pressure plate extractor of claim 10 wherein:
 - a. the drain plate includes opposing faces and a plate intermediate edge bounding the opposing faces, and
 - b. the seal surrounds the plate intermediate edge.
13. The pressure plate extractor of claim 10 further comprising a pressure chamber sidewall sized to fit on the pressure chamber base about the drain plate, wherein the pressure chamber sidewall bears against the seal and deforms it to tightly engage the drain plate and depression outer walls.
14. A pressure plate extractor comprising:
 - a. a pressure chamber base;
 - b. a drain plate sized to fit on the pressure chamber base, the drain plate including opposing plate inner and outer faces bounded by an intermediate edge;
 - c. a pressure chamber sidewall sized to fit on the pressure chamber base about the drain plate; and
 - d. a seal including:
 - (1) a first set of opposing sides, these sides respectively engaging the pressure chamber sidewall and the pressure chamber base;
 - (2) a second set of opposing sides, these sides respectively engaging the pressure chamber base and the drain plate.
15. The pressure plate extractor of claim 14 wherein:
 - a. the drain plate rests within a depression formed in the pressure chamber base, the depression having a depression outer wall;
 - b. the seal is situated between the depression outer wall and the drain plate; and
 - c. when the pressure chamber sidewall is urged toward the pressure chamber base, the seal is compressed therebetween, and thereby expands between the depression outer wall and the drain plate.

- 16. The pressure plate extractor of claim 14 wherein:
 - a. the plate inner face is situated adjacent a pressure chamber interior;
 - b. the plate outer face is situated outside the pressure chamber interior;
 - b. the plate intermediate edge is surrounded by the pressure chamber base; and
 - c. the seal is also engaged between the pressure chamber sidewall and the pressure chamber base.
- 17. The pressure plate extractor of claim 14 wherein the seal and drain plate rest within a depression defined in the pressure chamber base.
- 18. The pressure plate extractor of claim 14 wherein:
 - a. the plate inner face is adjacent a pressure chamber interior, with the entirety of the plate inner face being surrounded by the pressure chamber sidewall,
 - b. the plate outer face is outside the pressure chamber interior, and
 - c. the seal surrounds the plate intermediate edge.
- 19. The pressure plate extractor of claim 14 wherein:
 - a. the plate inner face is situated adjacent a pressure chamber interior;
 - b. the plate outer face is situated outside the pressure chamber interior; and
 - b. the pressure chamber sidewall extends about the entirety of the plate inner face.
- 20. The pressure plate extractor of claim 14 wherein:
 - a. the first set of opposing sides of the seal, and
 - b. the second set of opposing sides of the seal,
 are planar.
- 21. The pressure plate extractor of claim 14 wherein the seal is formed of a strip of elastomeric material with its ends situated in abutment.
- 22. A pressure plate extractor comprising:
 - a. a pressure chamber base;
 - b. a drain plate sized to fit on the pressure chamber base, the drain plate including:
 - (1) a plate inner face adjacent a pressure chamber interior,
 - (2) an opposing plate outer face outside the pressure chamber interior, and
 - (3) a plate intermediate edge situated between the plate inner and outer faces;

- c. a pressure chamber sidewall sized to fit on the pressure chamber base and to surround the entirety of the plate inner face;
- d. a seal:
 - (1) resting between and engaging the pressure chamber sidewall and the pressure chamber base along a first direction, and
 - (2) resting between and engaging the pressure chamber base and the plate intermediate edge along a second direction oriented at least substantially perpendicular to the first direction,
 such that when the pressure chamber sidewall is urged in the first direction toward the pressure chamber base, the seal is compressed therebetween, and thereby expands in the second direction between the pressure chamber base and the plate intermediate edge.
- 23. The pressure plate extractor or claim 22 wherein:
 - a. the drain plate rests within a depression formed in the pressure chamber base, the depression having a depression outer wall;
 - b. the seal is situated between the depression outer wall and the drain plate.
- 24. The pressure plate extractor of claim 22 wherein the plate intermediate edge is surrounded by the pressure chamber base.
- 25. The pressure plate extractor of claim 22 wherein the seal and drain plate rest within a depression defined in the pressure chamber base.
- 26. The pressure plate extractor of claim 22 wherein the seal has:
 - a. a first set of opposing planar faces, these faces respectively abutting the pressure chamber sidewall and the pressure chamber base; and
 - b. a second set of opposing planar faces, these faces respectively abutting the plate intermediate edge and the pressure chamber base.
- 27. The pressure plate extractor of claim 26 wherein the seal also has a second set of opposing planar faces which respectively abut the pressure chamber sidewall and drain plate.
- 28. The pressure plate extractor of claim 22 wherein the seal is formed of a strip of elastomeric material with its ends situated in abutment.

* * * * *