



US 20220081711A9

(19) **United States**  
(12) **Patent Application Publication**  
**Romero et al.**

(10) **Pub. No.: US 2022/0081711 A9**  
(48) **Pub. Date: Mar. 17, 2022**  
**CORRECTED PUBLICATION**

(54) **HIGH THROUGHPUT NUCLEIC ACID  
PROFILING OF SINGLE CELLS**

(71) Applicant: **WISCONSIN ALUMNI RESEARCH  
FOUNDATION**, Madison, WI (US)

(72) Inventors: **Philip Anthony Romero**, Madison, WI  
(US); **Leland Bradford Hyman**,  
Madison, WI (US)

(73) Assignee: **WISCONSIN ALUMNI RESEARCH  
FOUNDATION**, Madison, WI (US)

(21) Appl. No.: **16/978,027**

(22) PCT Filed: **Mar. 6, 2019**

(86) PCT No.: **PCT/US2019/020926**

§ 371 (c)(1),

(2) Date: **Sep. 3, 2020**

#### **Prior Publication Data**

(15) Correction of US 2021/0363573 A1 Nov. 25, 2021  
See (60) Related U.S. Application Data.

(65) US 2021/0363573 A1 Nov. 25, 2021

#### **Related U.S. Application Data**

(60) Provisional application No. 62/639,822, filed on Mar.  
7, 2018.

#### **Publication Classification**


(51) **Int. Cl.**  
**C12Q 1/6844** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **C12Q 1/6844** (2013.01)

#### **(57) ABSTRACT**

Methods of profiling the nucleic acid composition of single cells and tools for same. The methods can include isolating a single cell in a liquid droplet, lysing the single cell in the liquid droplet to release template nucleic acid from the cell, amplifying the template nucleic acid in the liquid droplet to generate amplified nucleic acid, and detecting the amplified nucleic acid in the liquid droplet. The methods can be useful for profiling expression patterns and/or detecting genetic characteristics such as single nucleotide polymorphisms. The tools include nucleic acid logic gates, including polymerase-dependent logic gates. The logic gates can perform logical operations such as YES, NOT, AND, OR, AND-NOT, NOT-AND, NOT-OR, EXCLUSIVE-OR, EXCLUSIVE-NOR, and IMPLY. The tools also include microfluidic systems for performing the methods.

**Specification includes a Sequence Listing.**

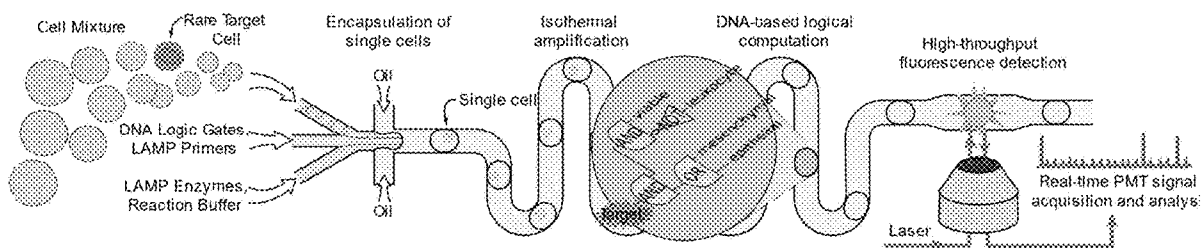

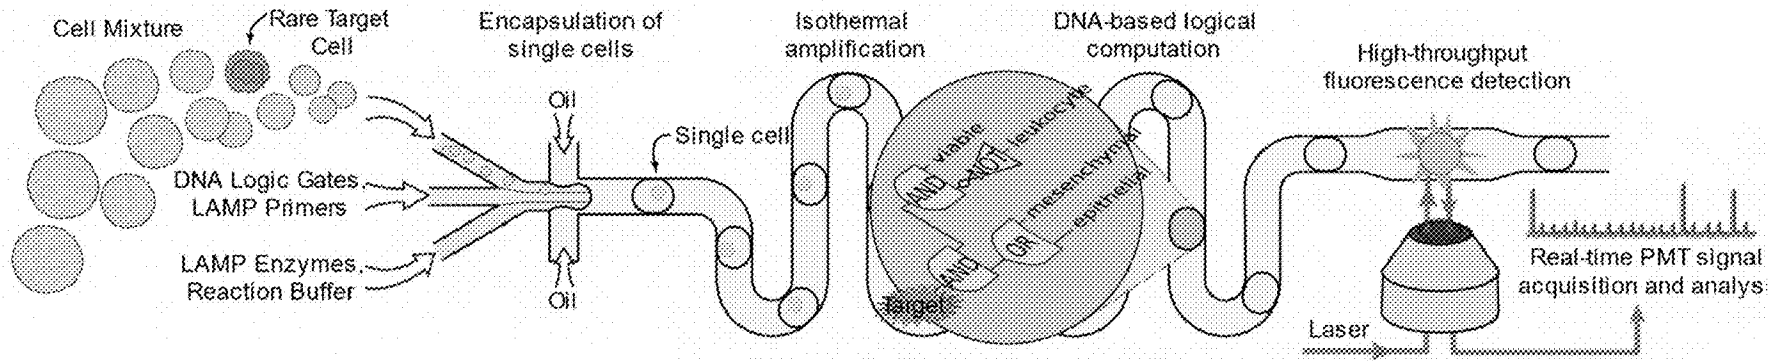


FIG. 1

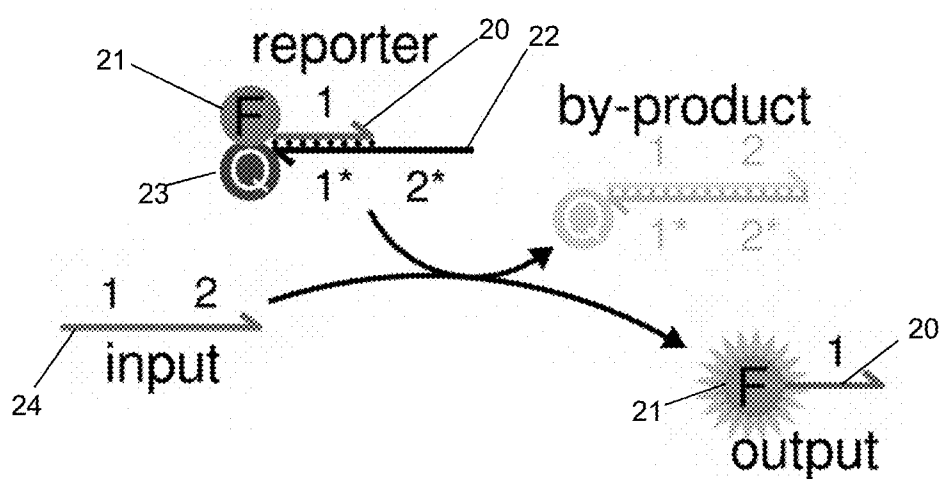


FIG. 2

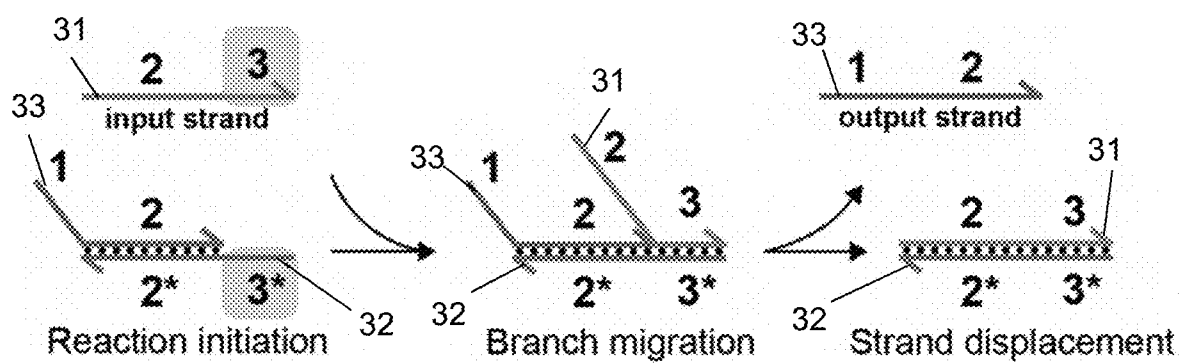


FIG. 3

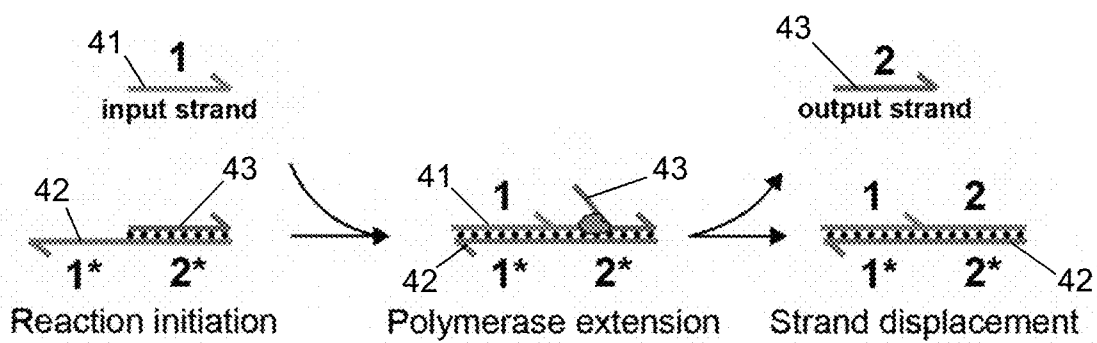


FIG. 4

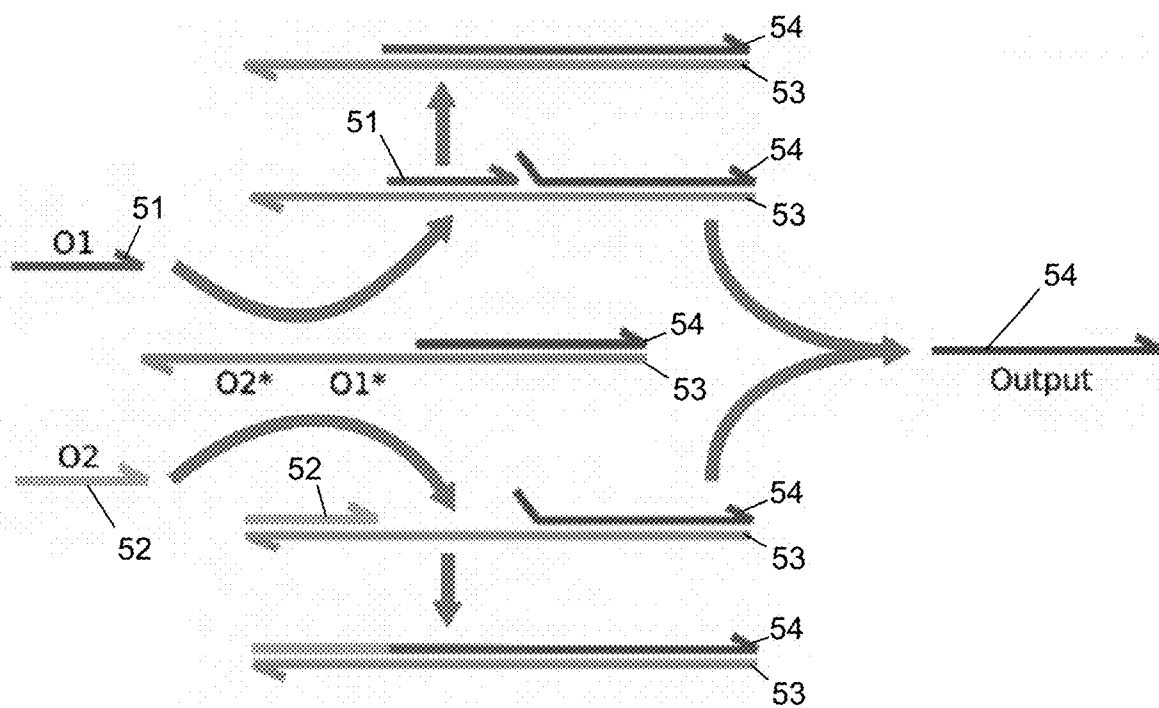


FIG. 5

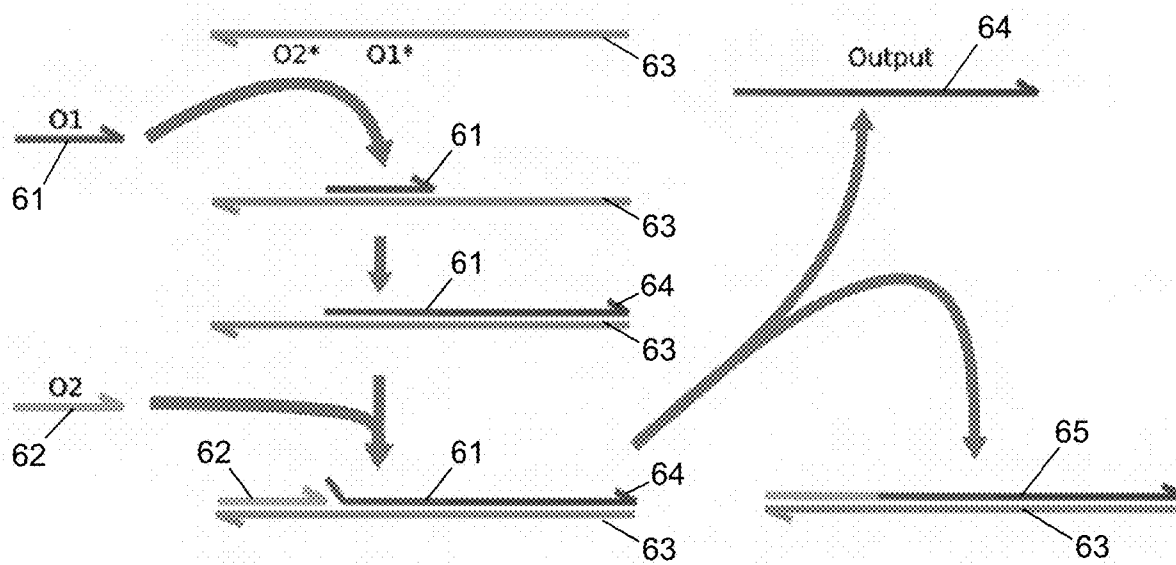


FIG. 6

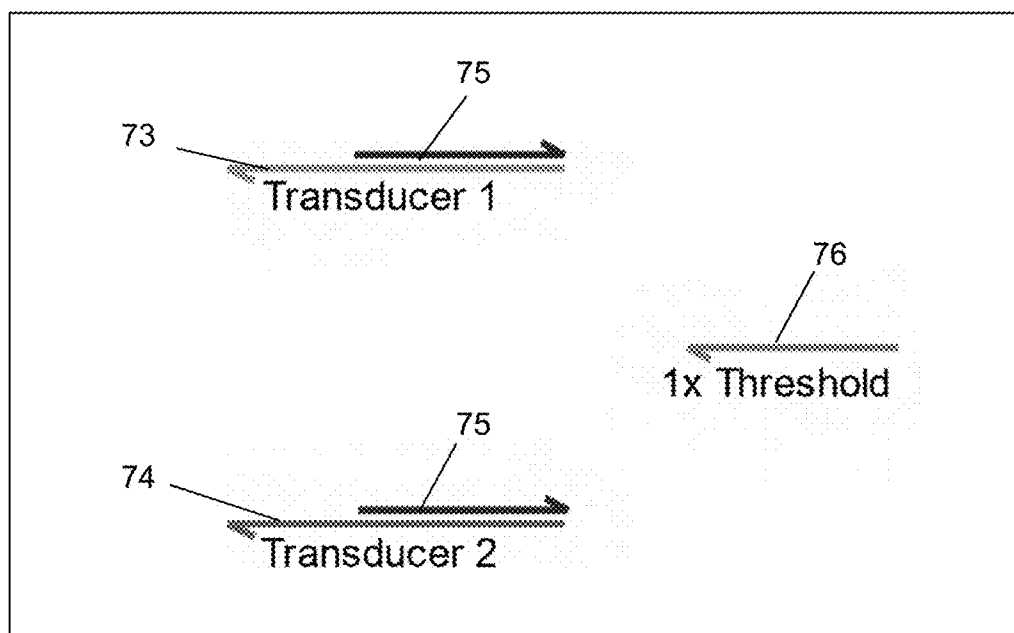


FIG. 7A

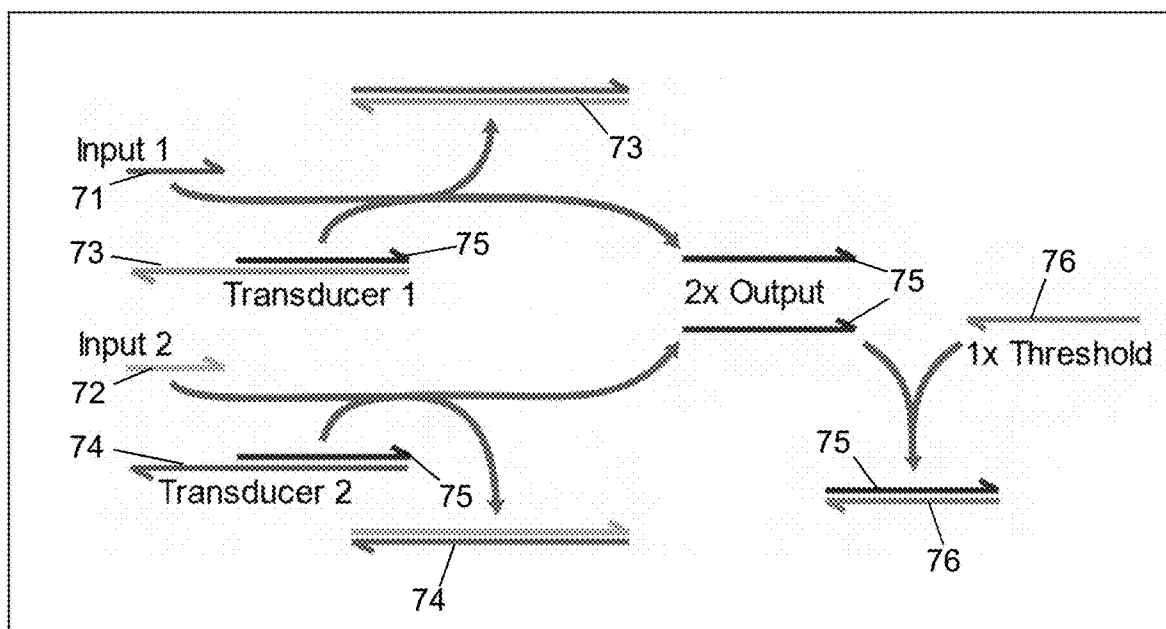


FIG. 7B

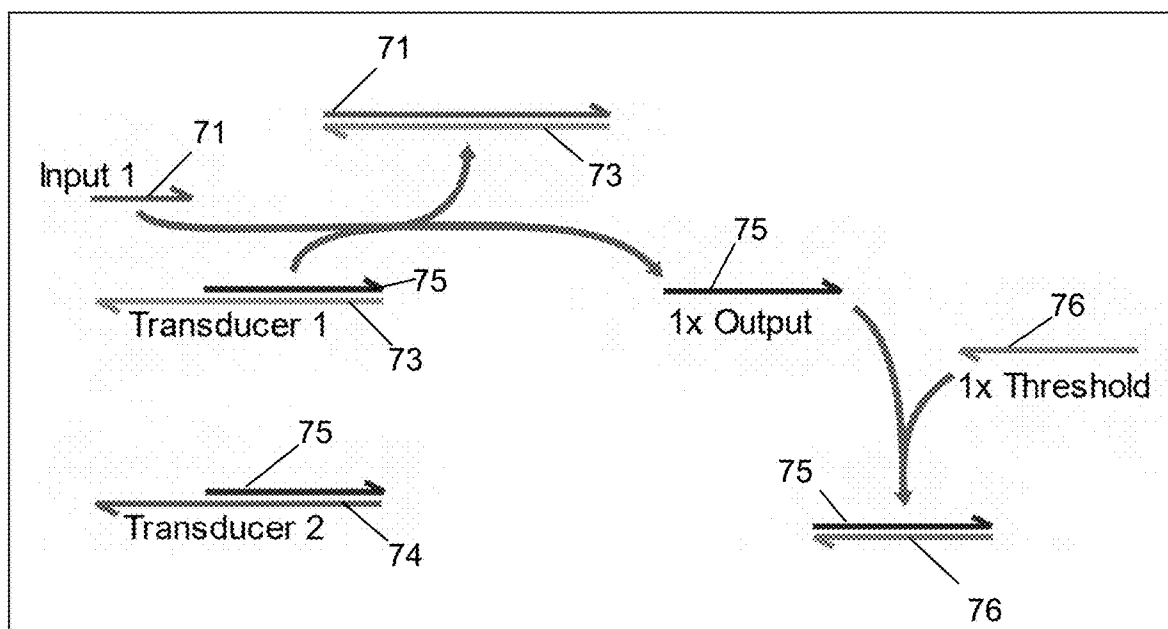


FIG. 7C

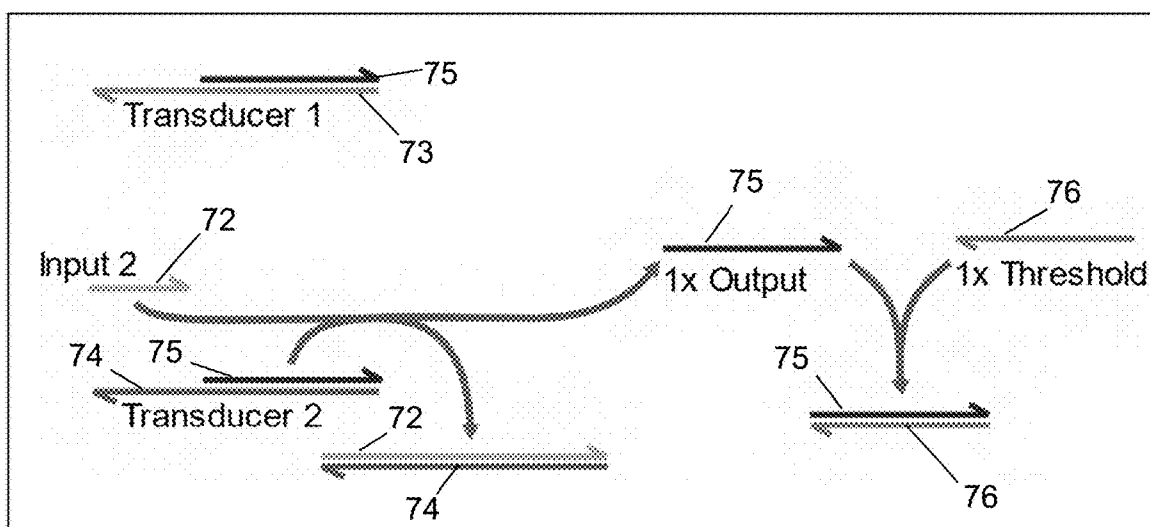


FIG. 7D

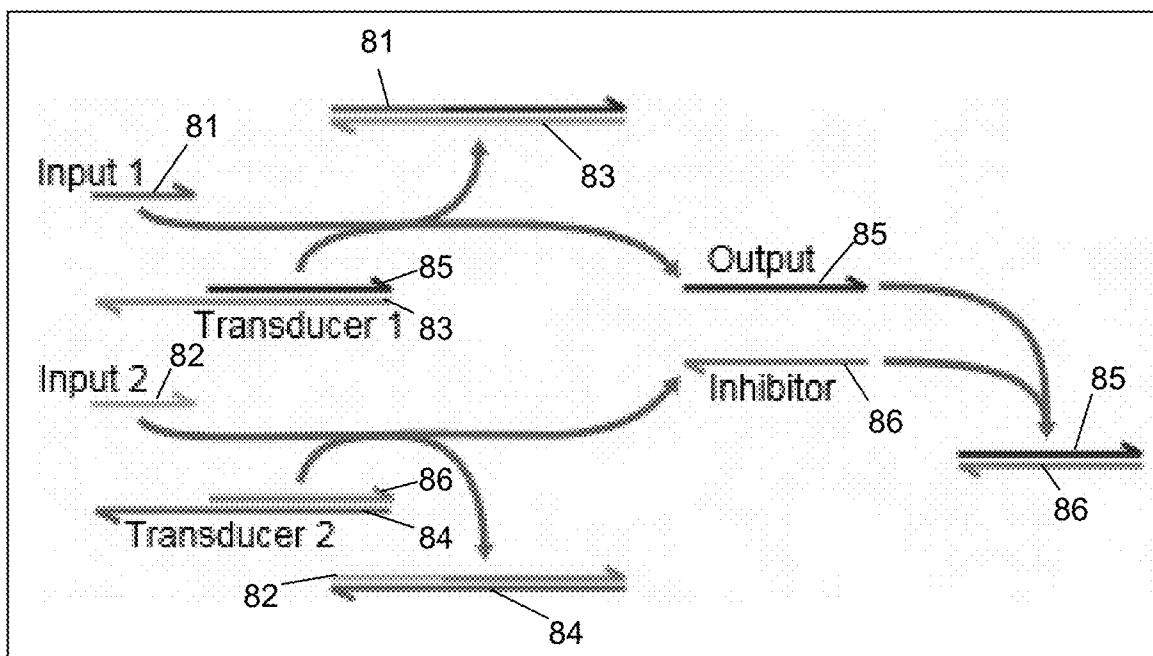


FIG. 8

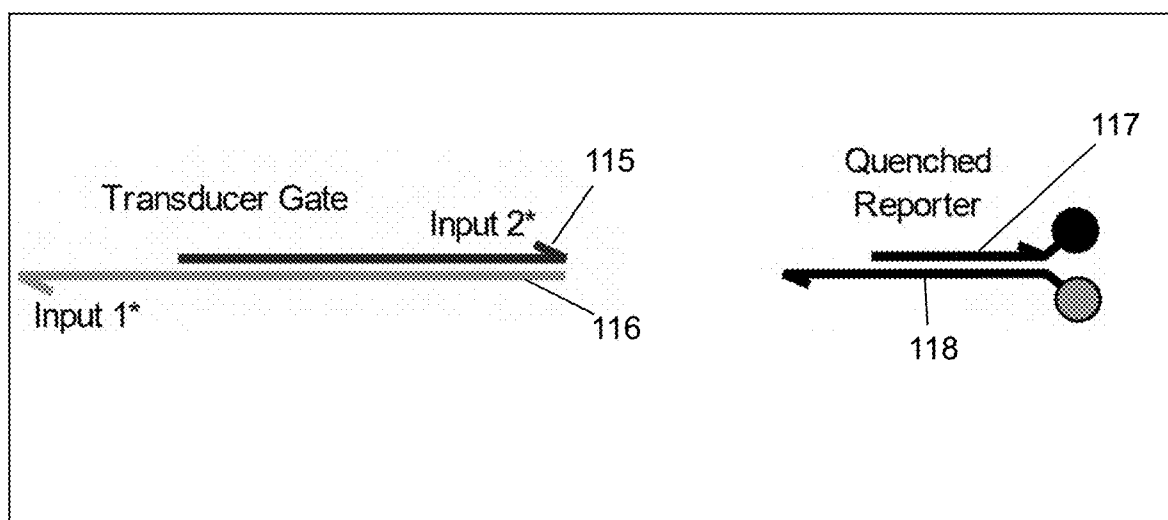


FIG. 9A



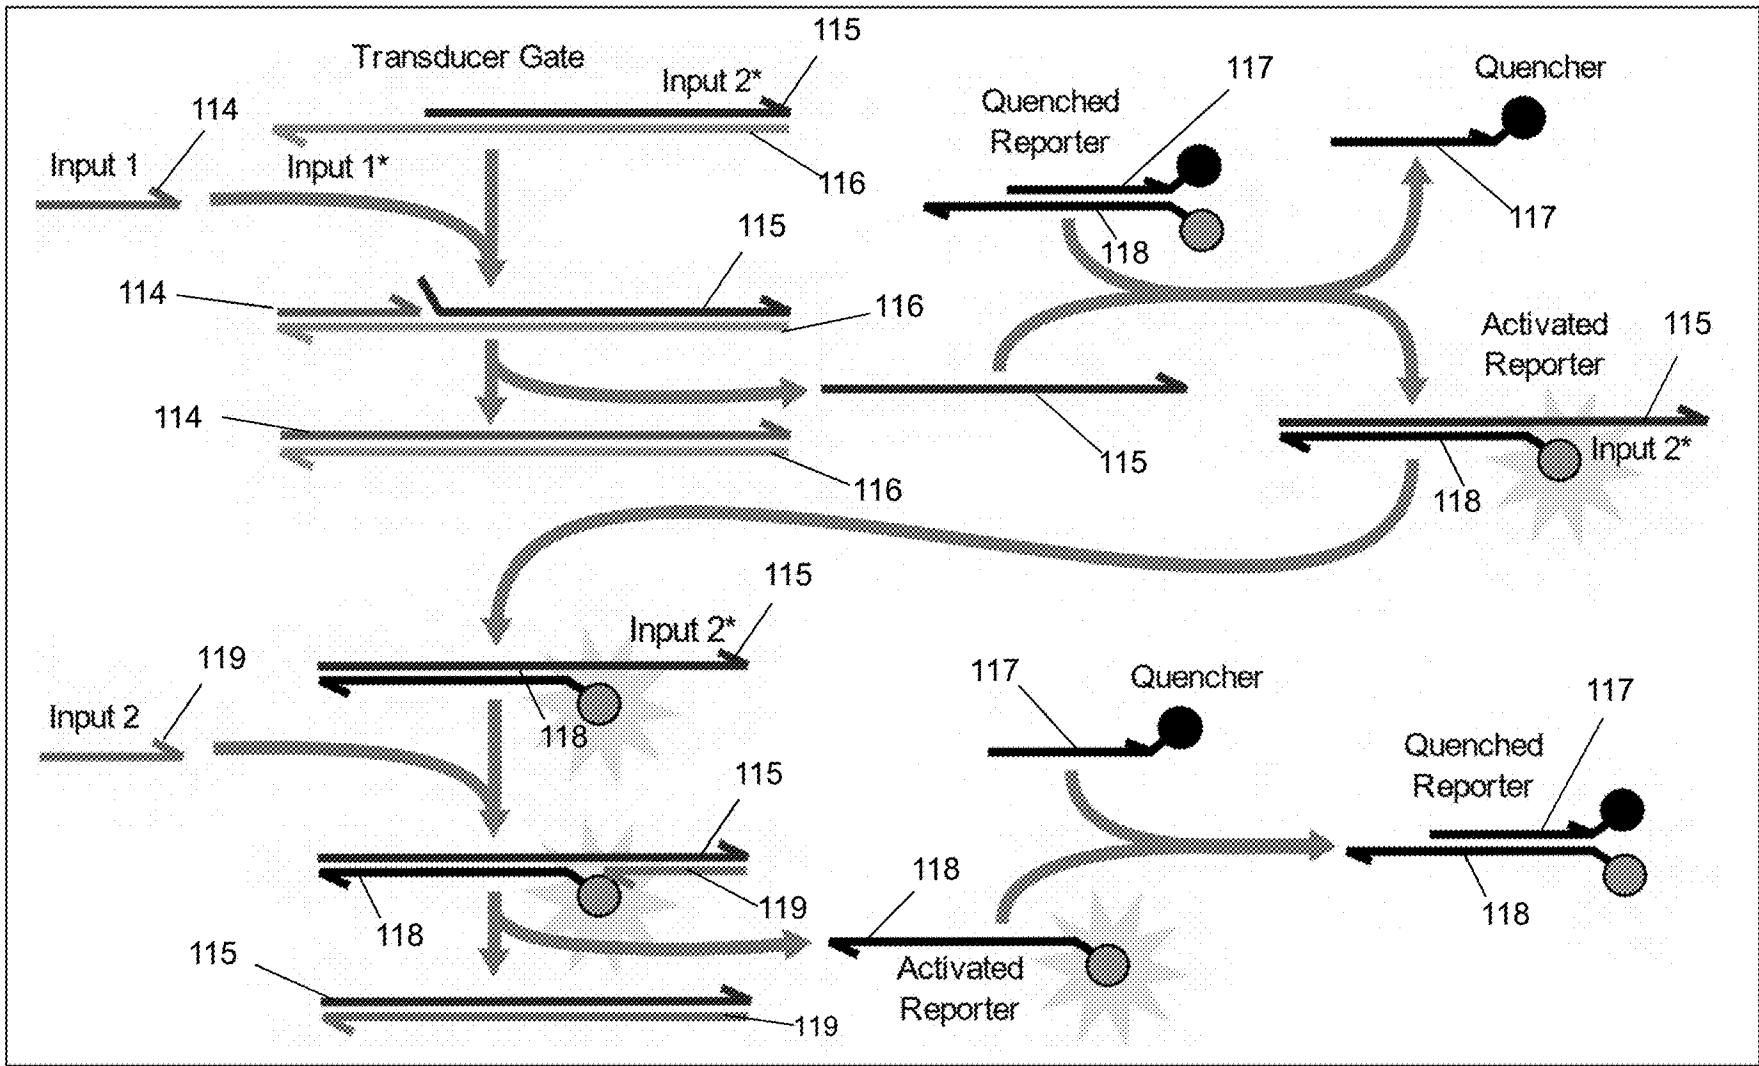


FIG. 9B

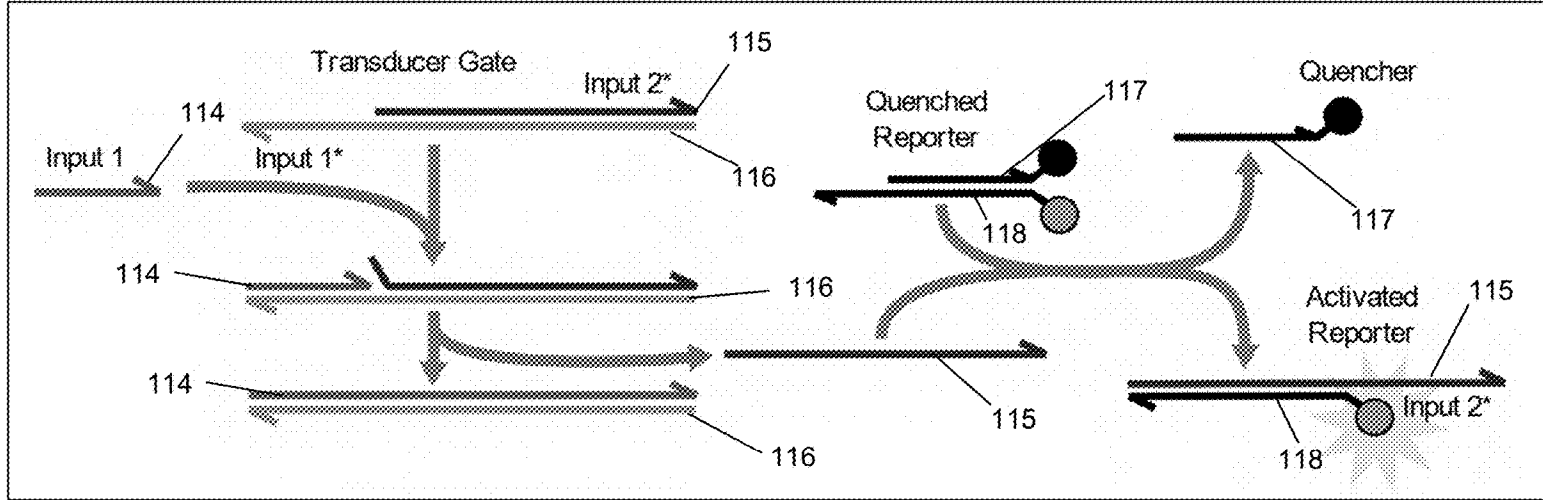


FIG. 9C

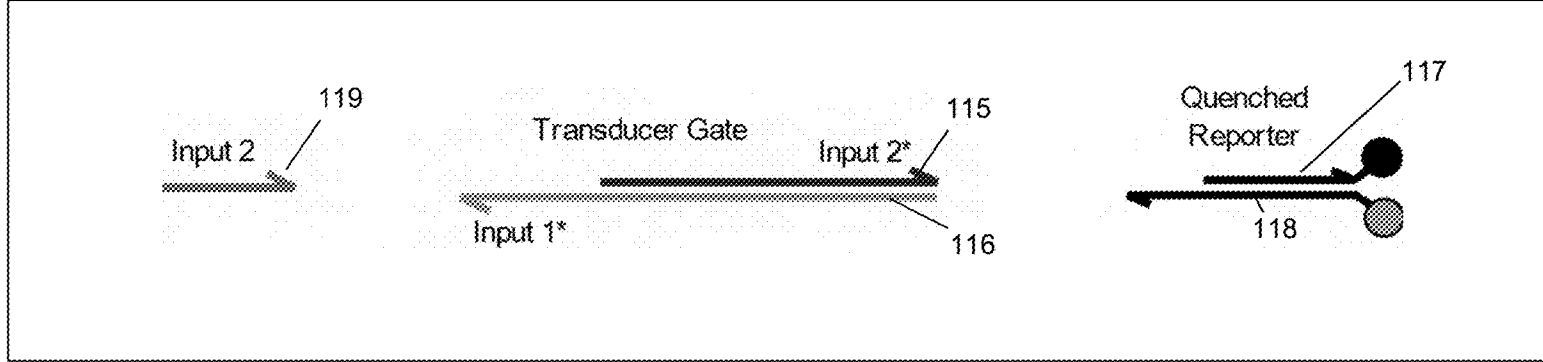


FIG. 9D

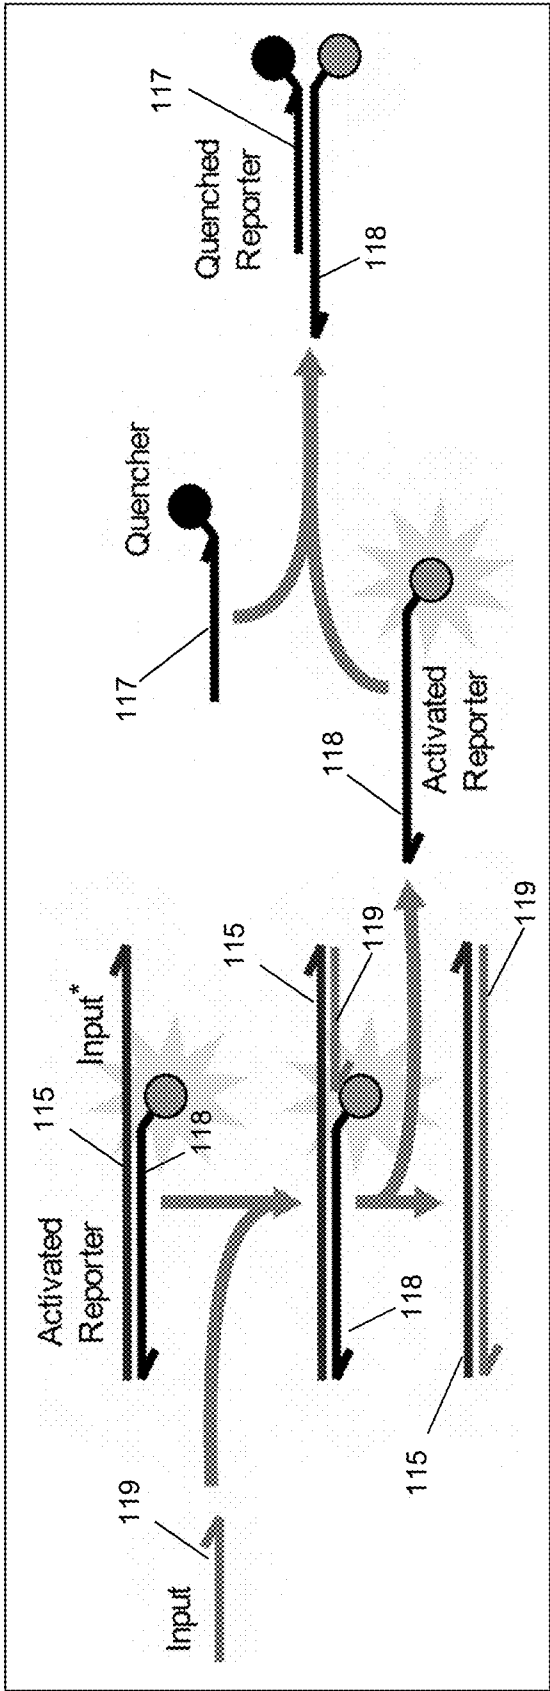


FIG. 10

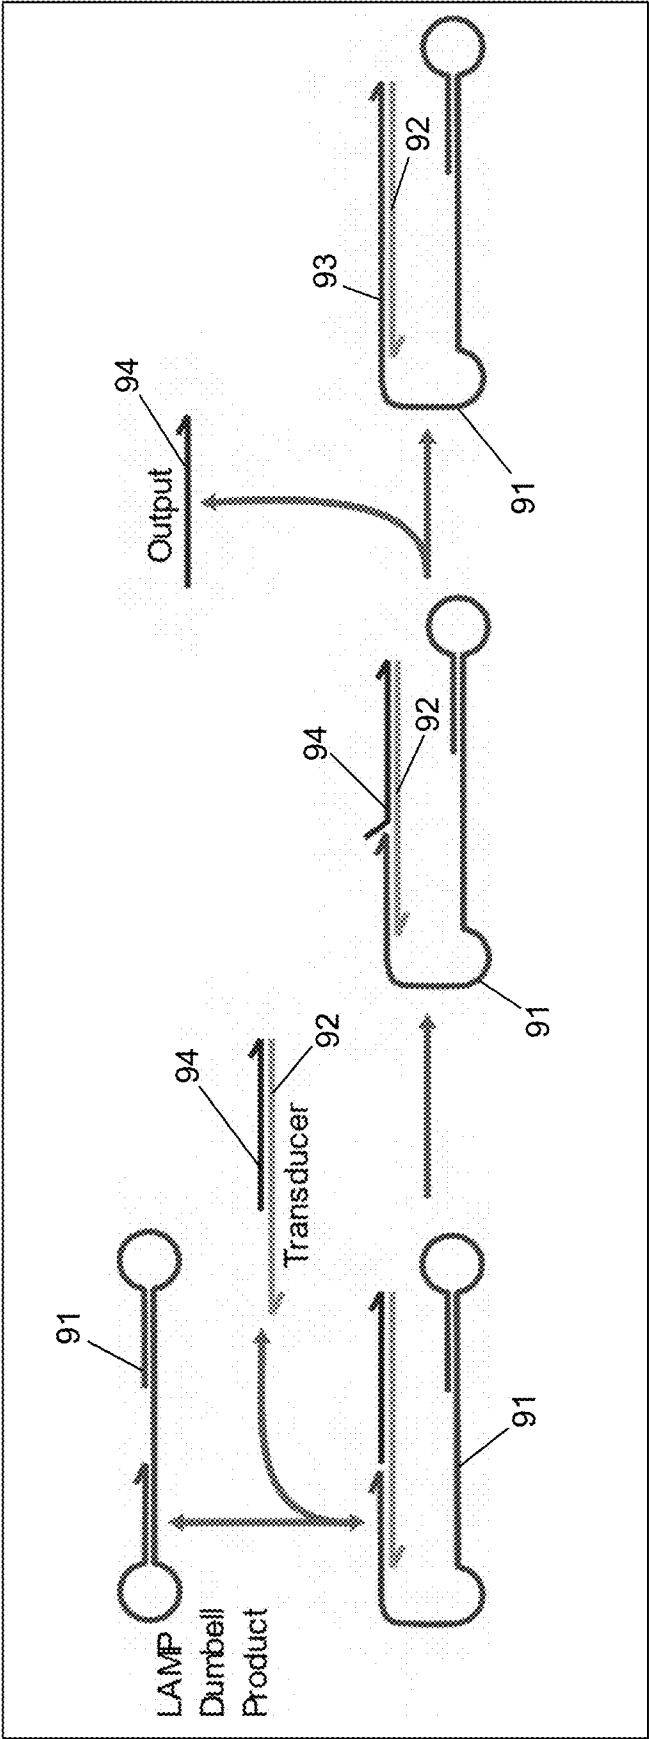


FIG. 11

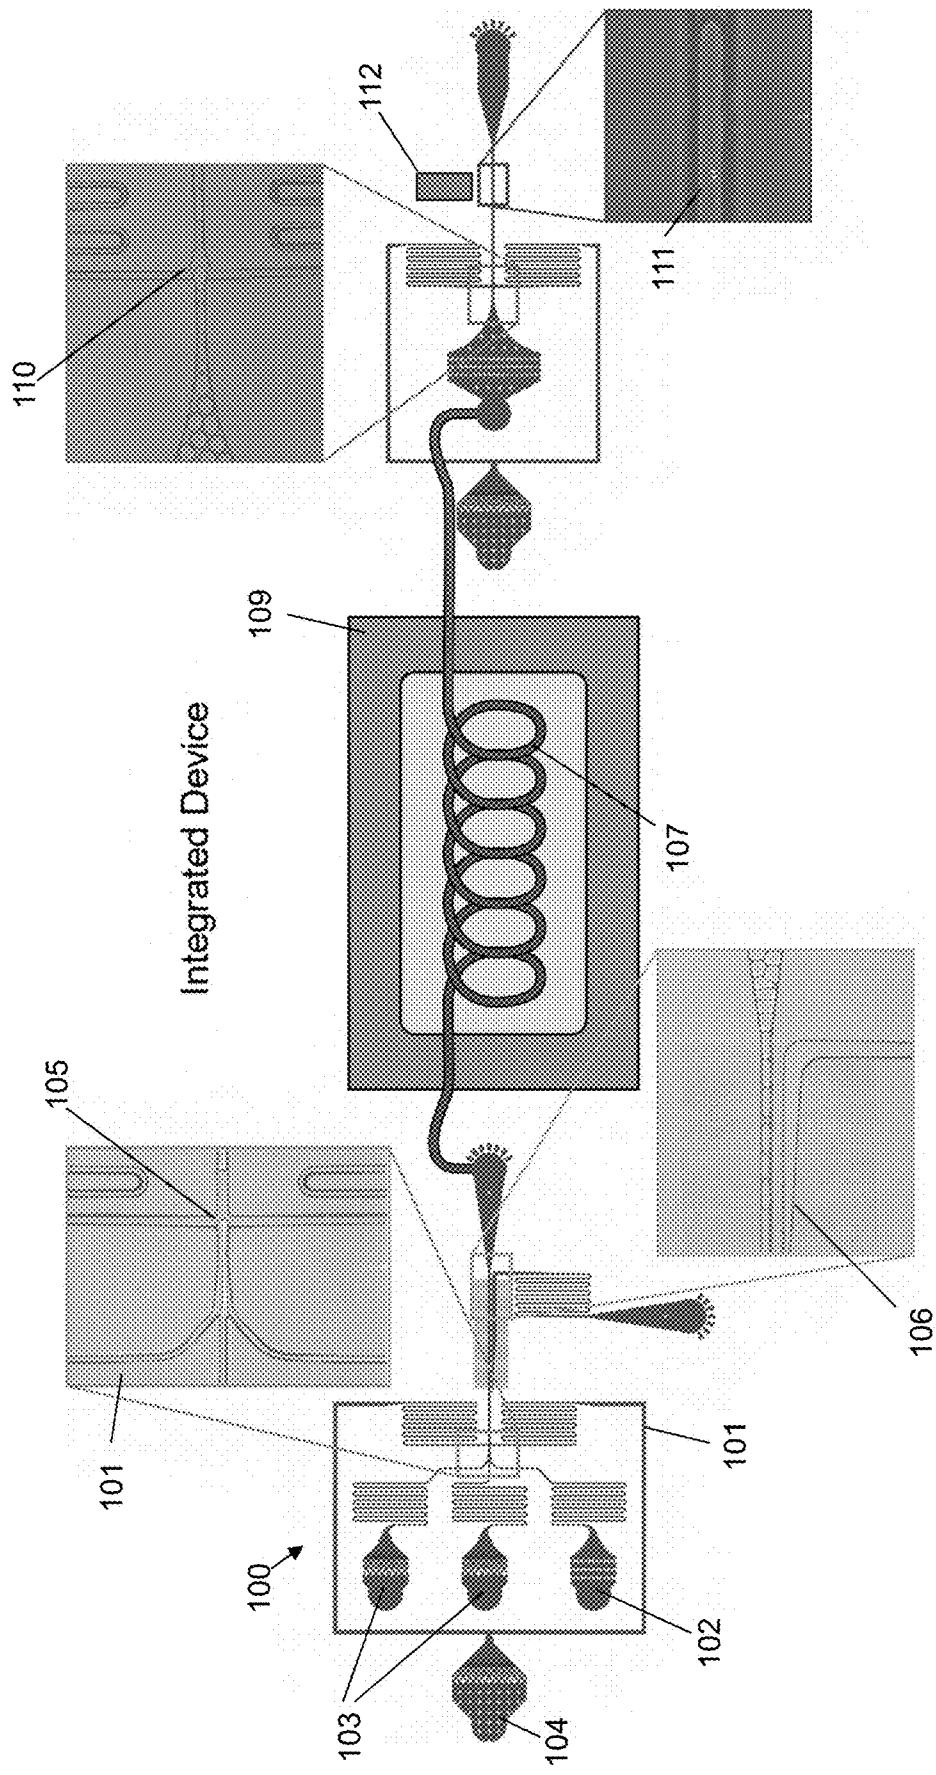


FIG. 12

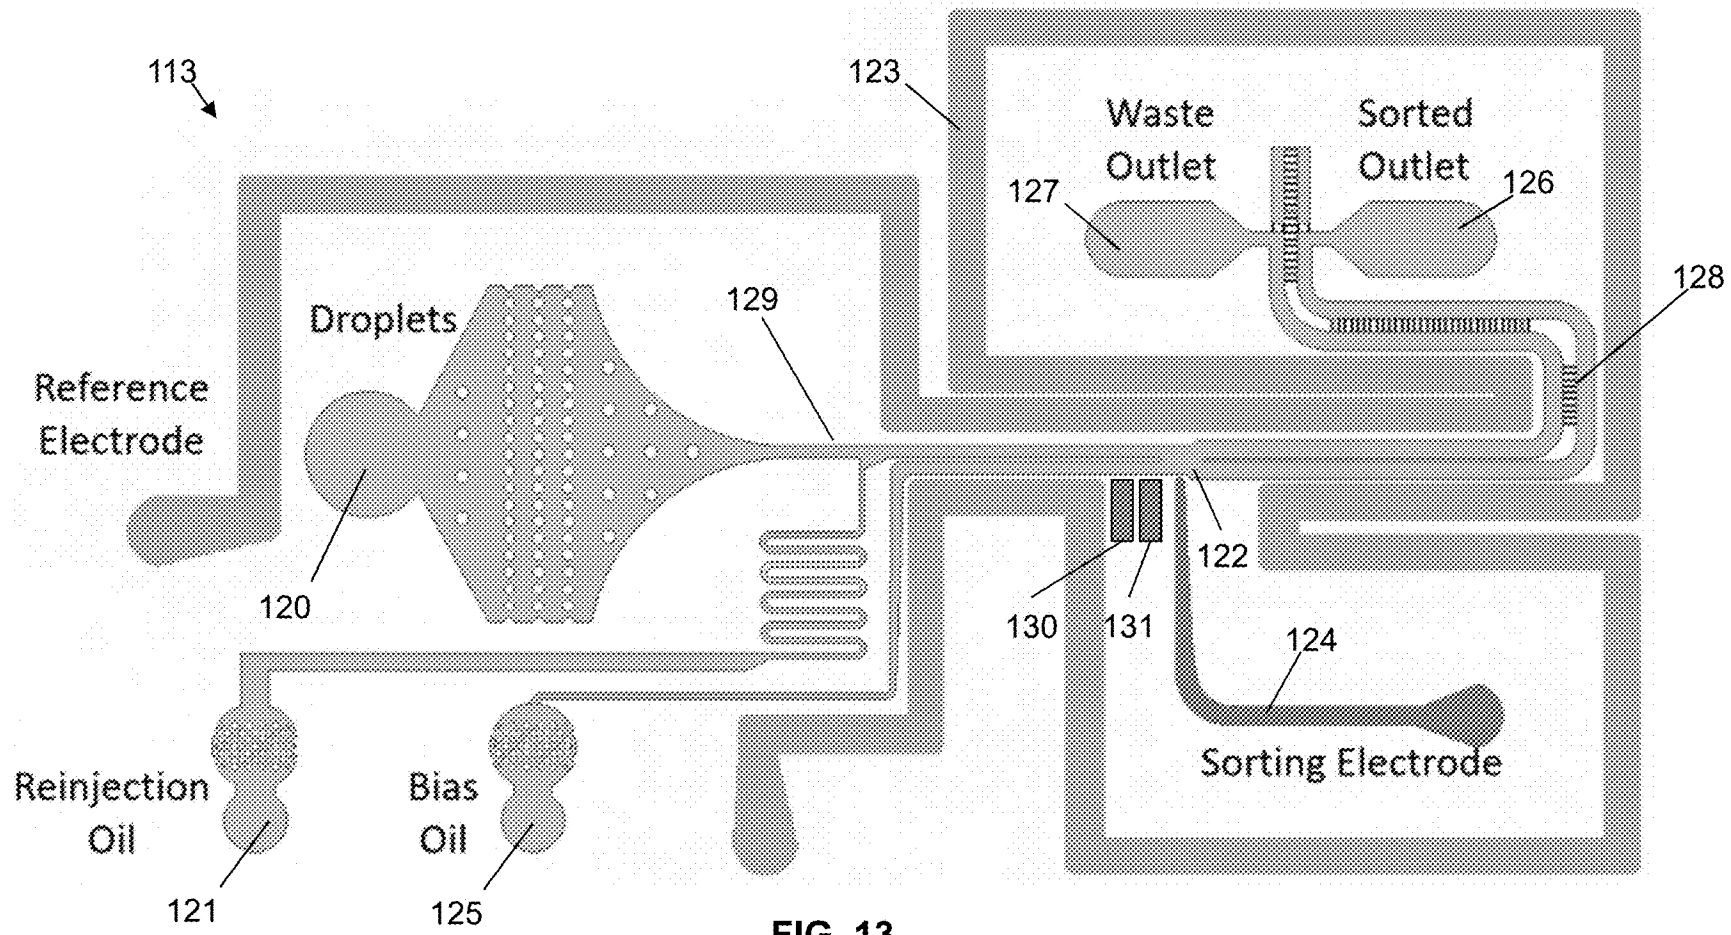


FIG. 13

## High background

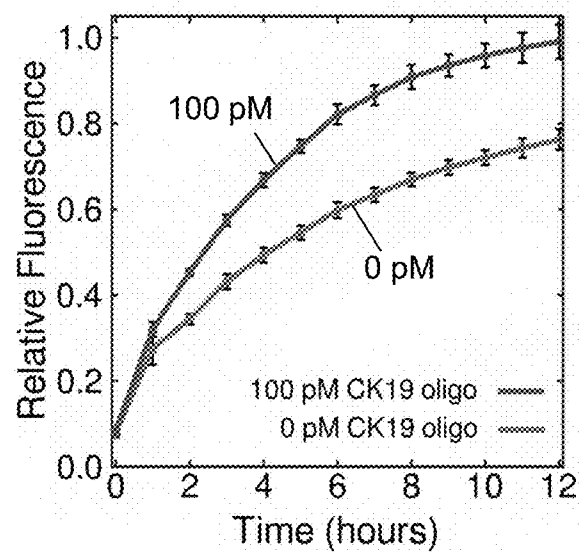


FIG. 14A

## Lysate inhibition

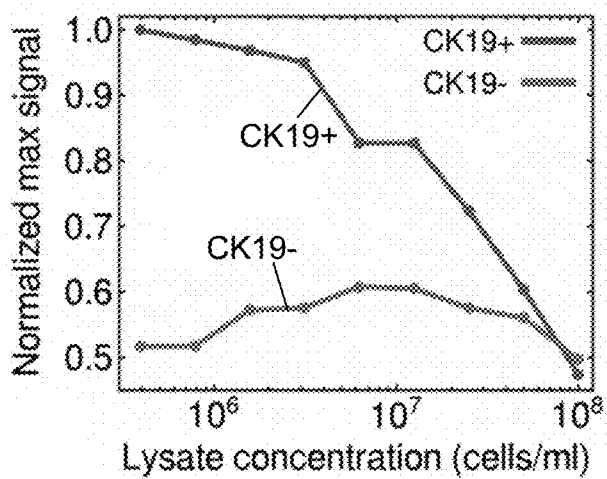


FIG. 14B

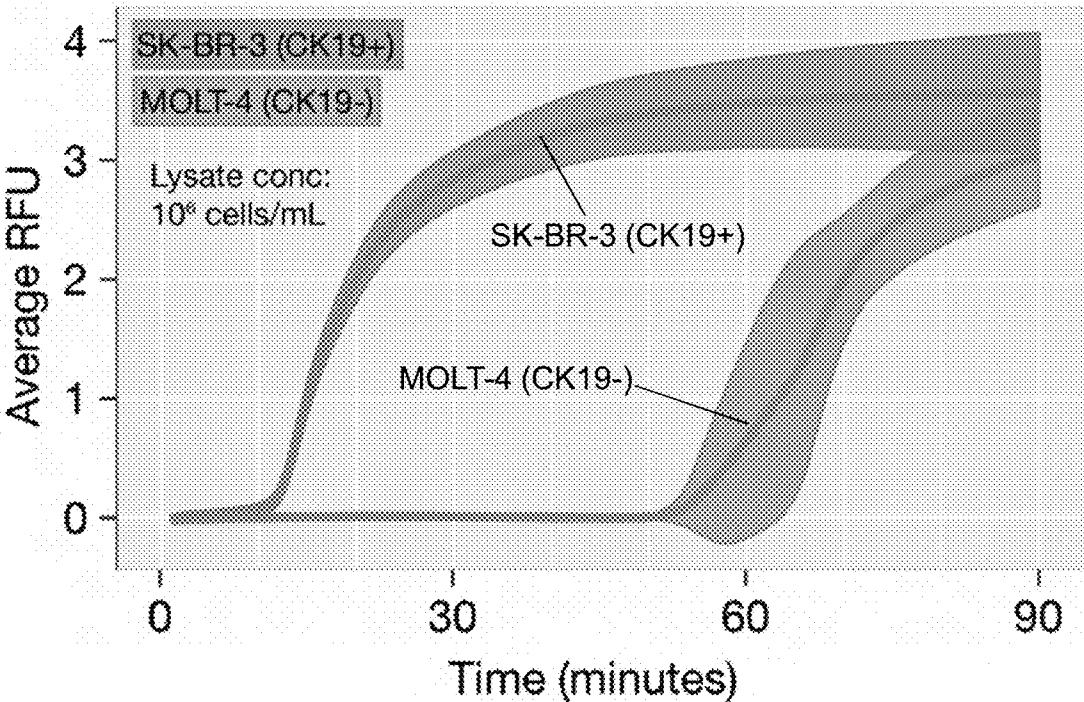


FIG. 15A

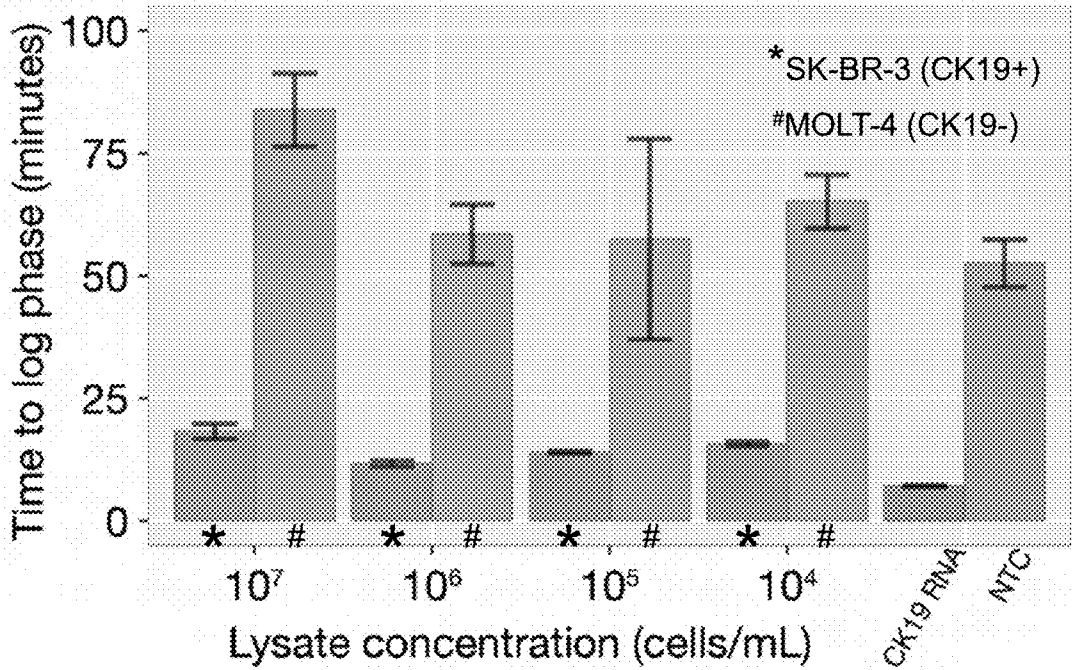


FIG. 15B



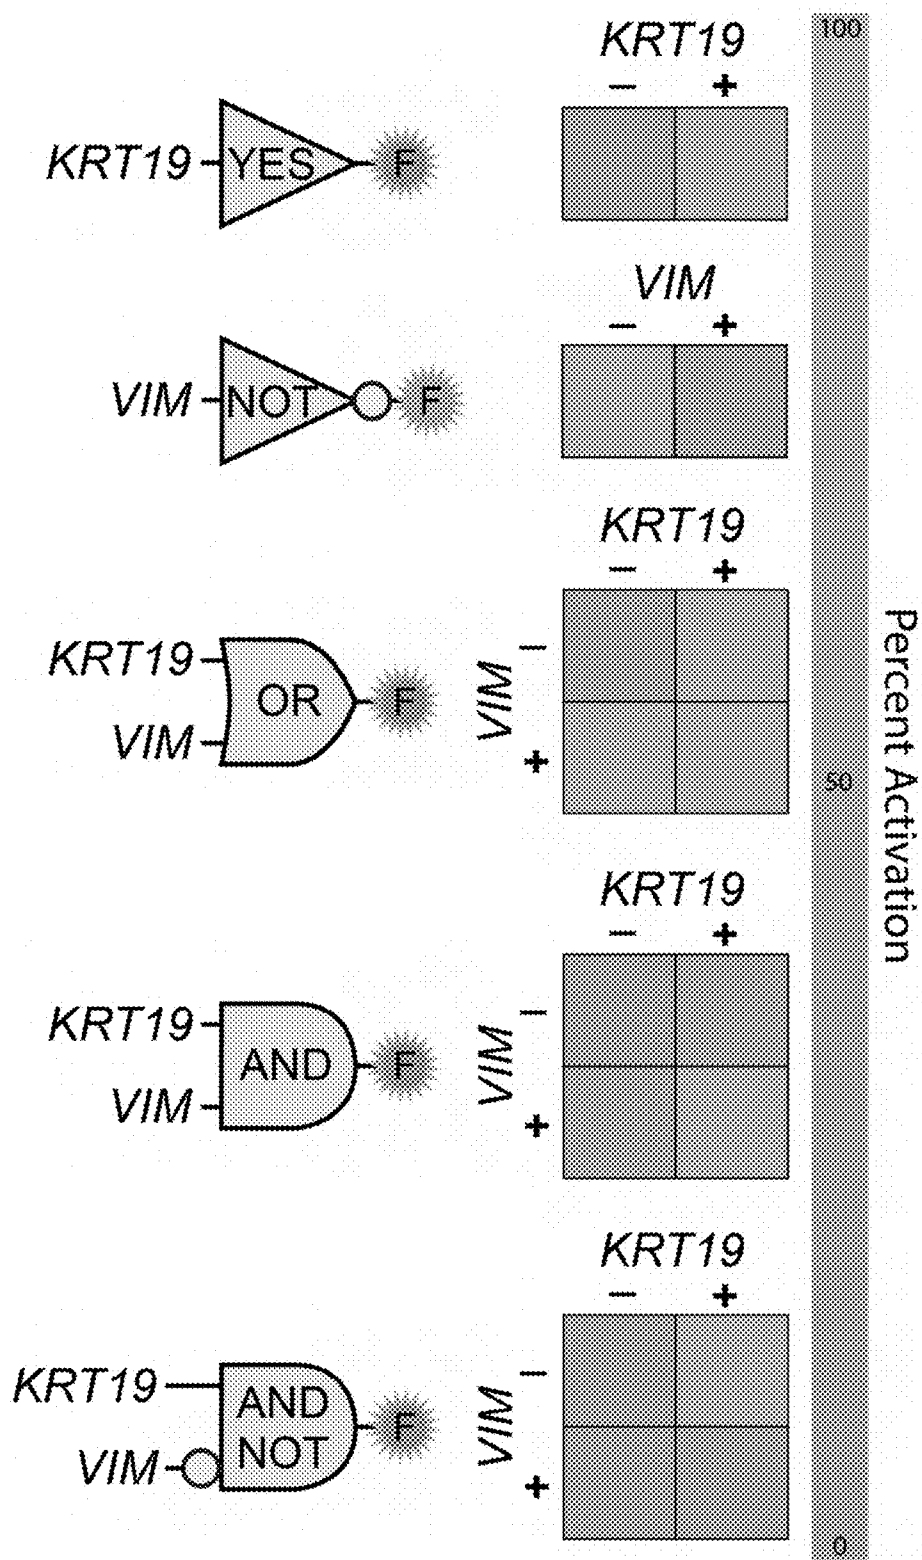


FIG. 16

## KRT19 Transducer

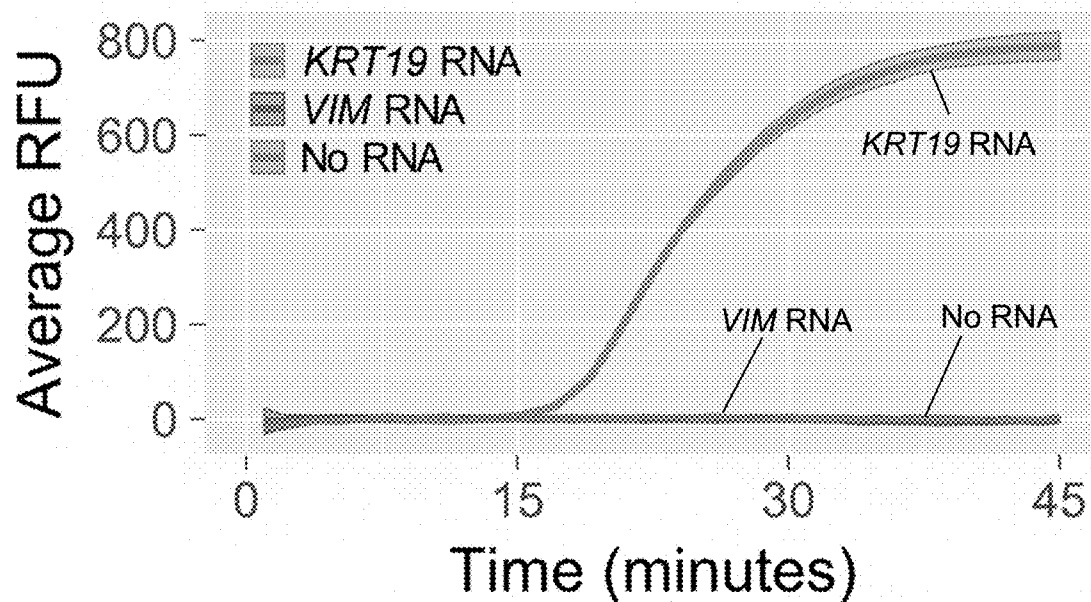


FIG. 17A

## VIM Transducer

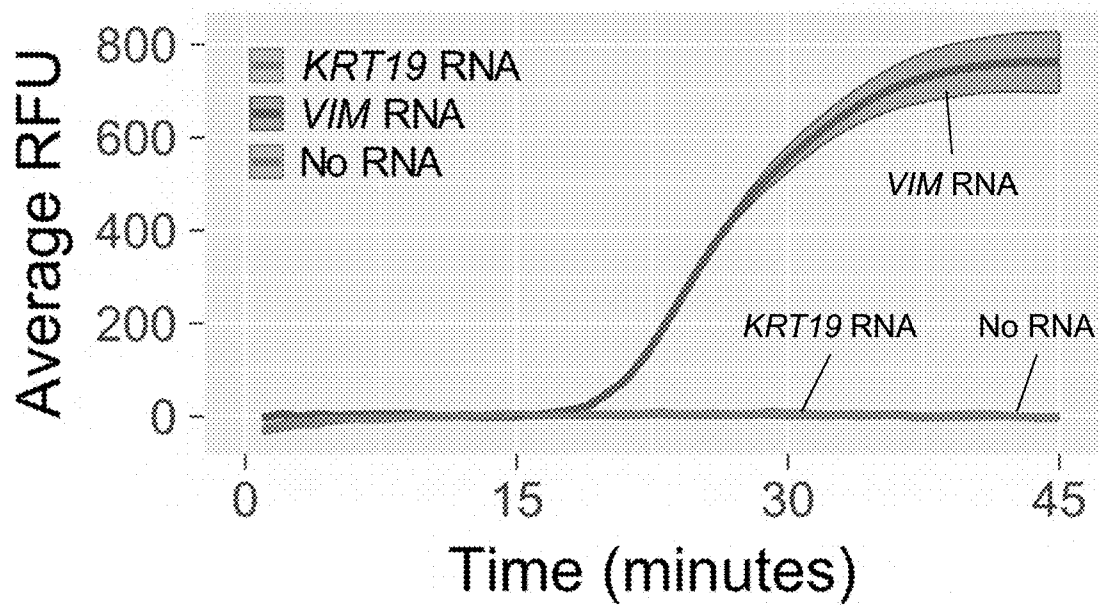


FIG. 17B

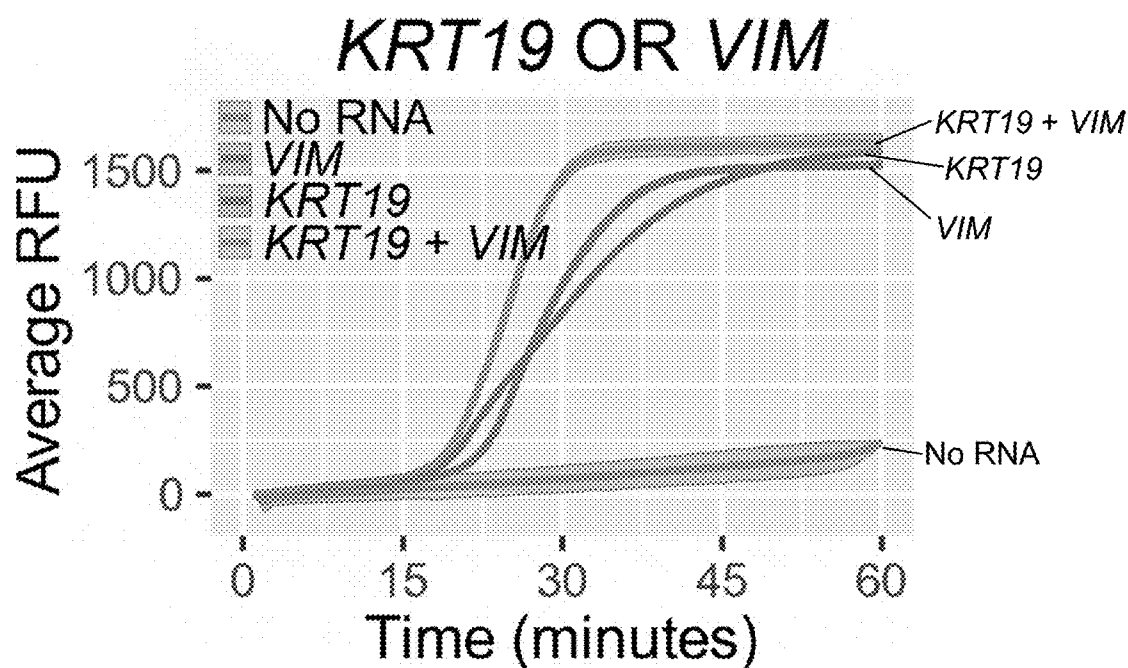


FIG. 18A

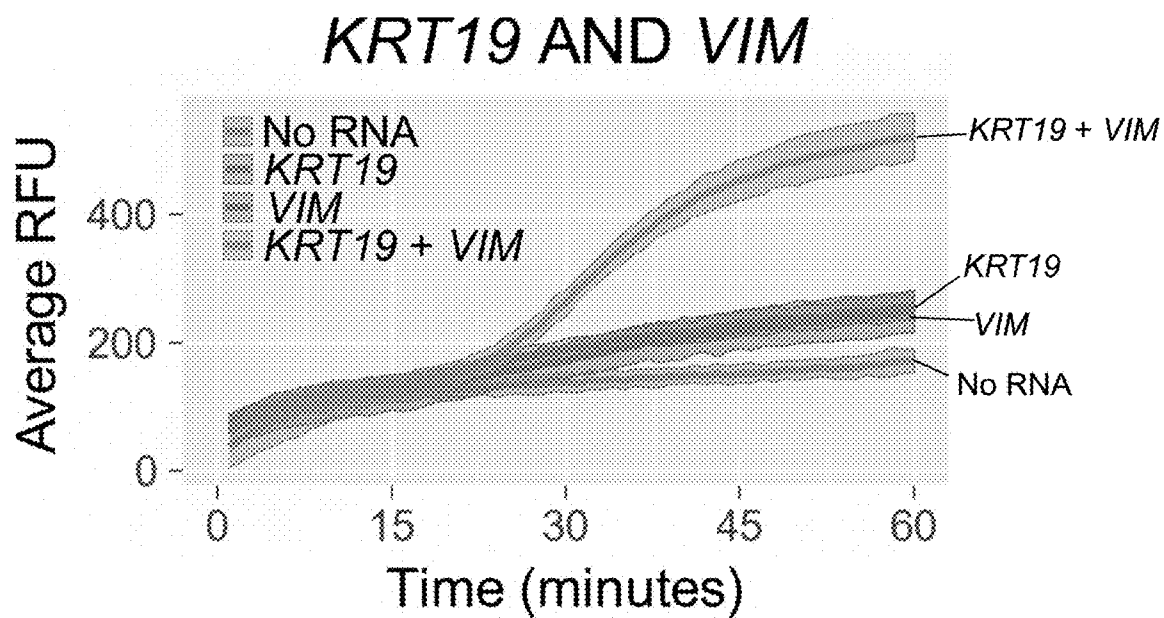


FIG. 18B

## NOT VIM

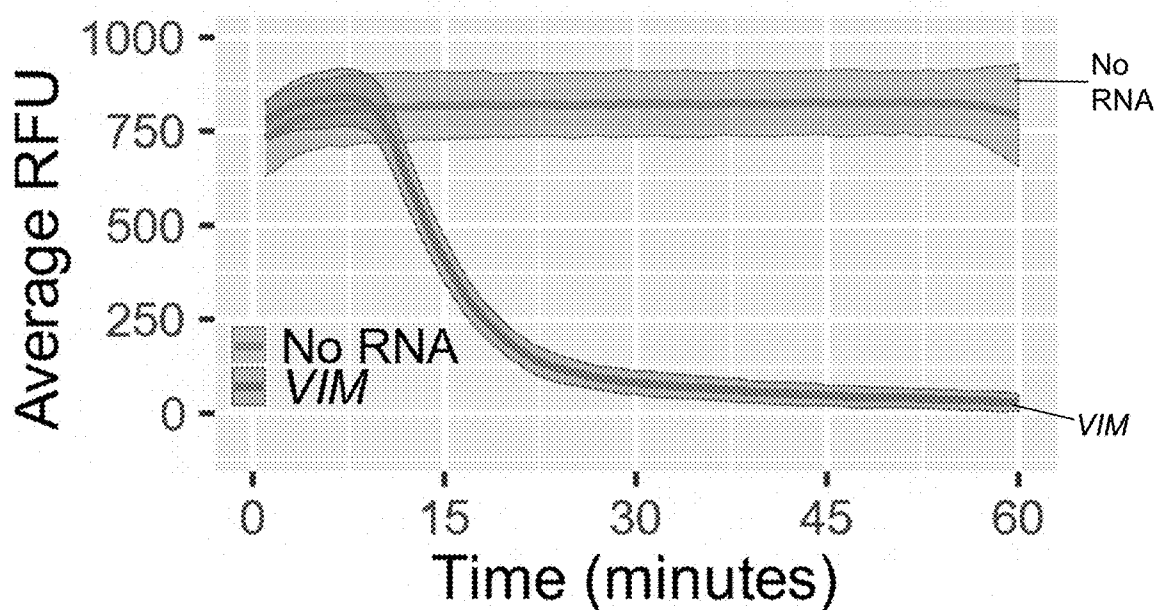


FIG. 19A

## KRT19 AND NOT VIM



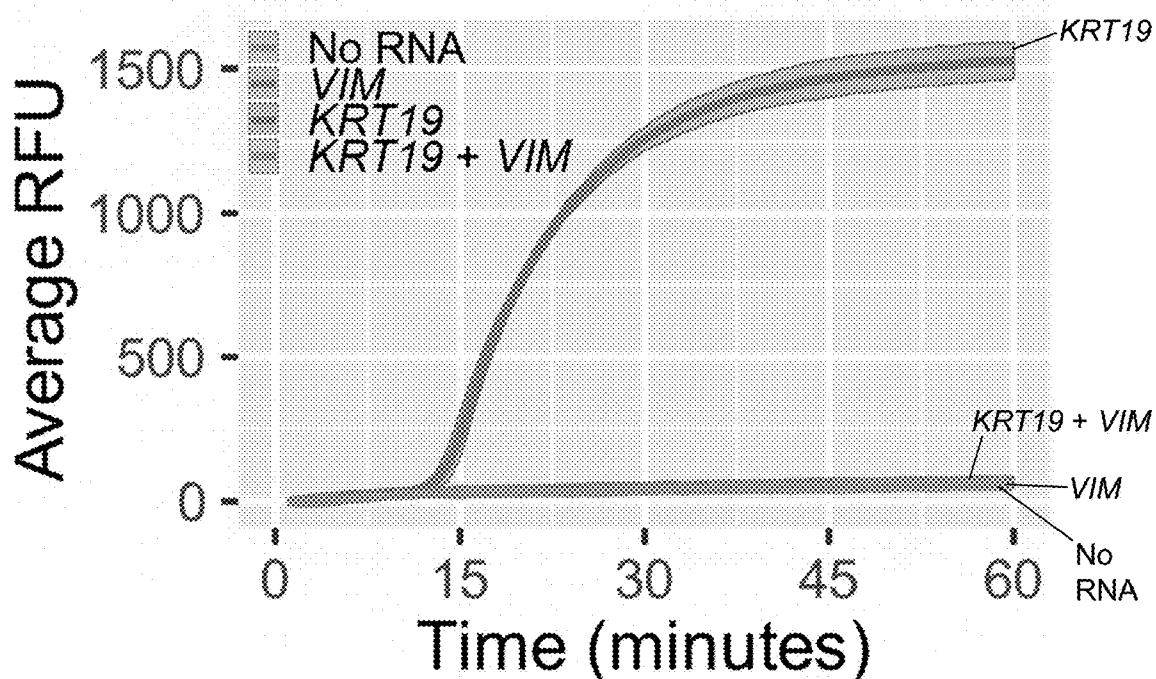




FIG. 19B

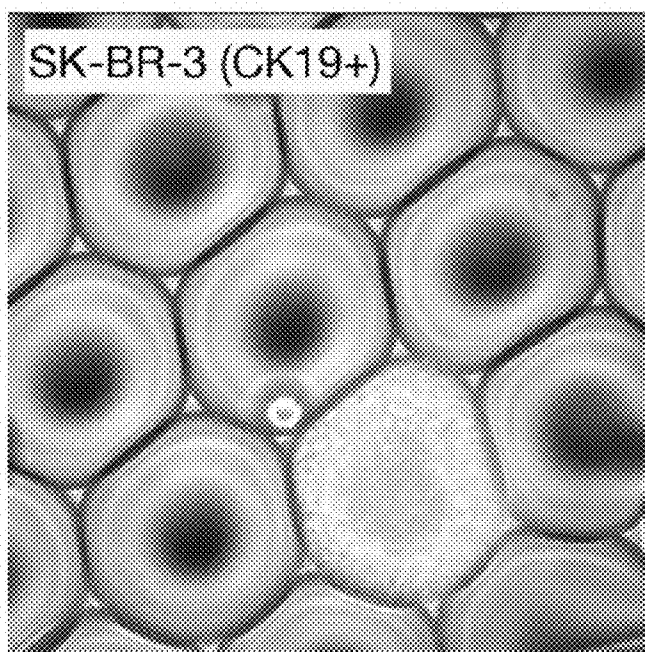


**FIG. 20A**

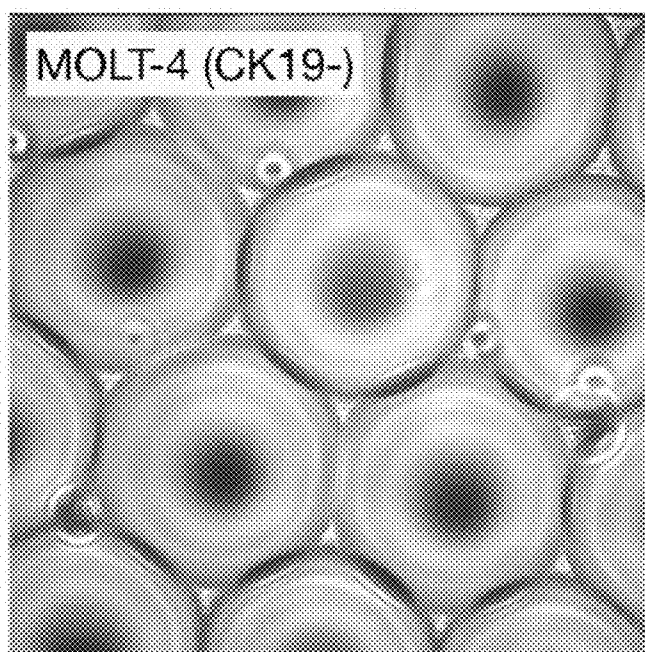


**FIG. 20B**

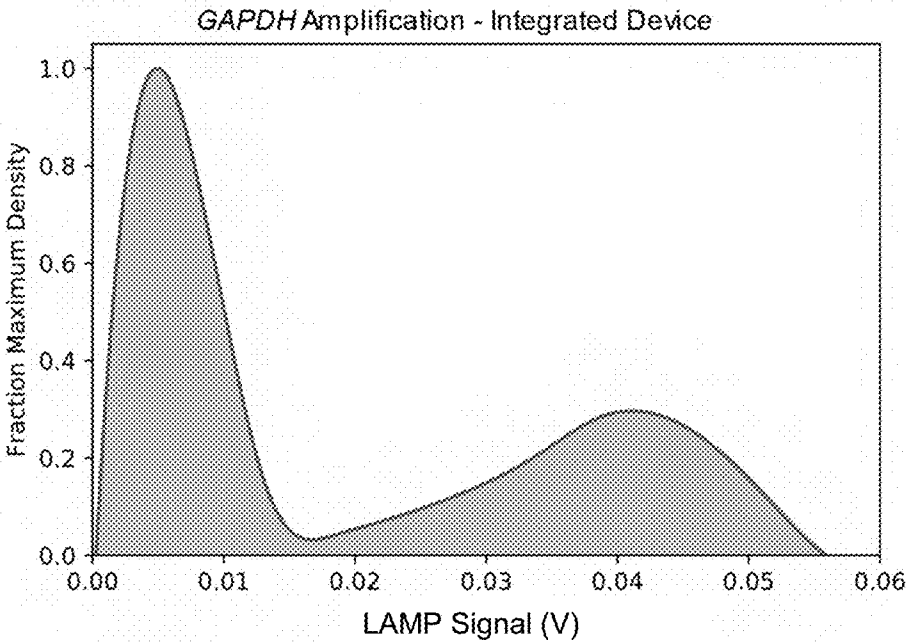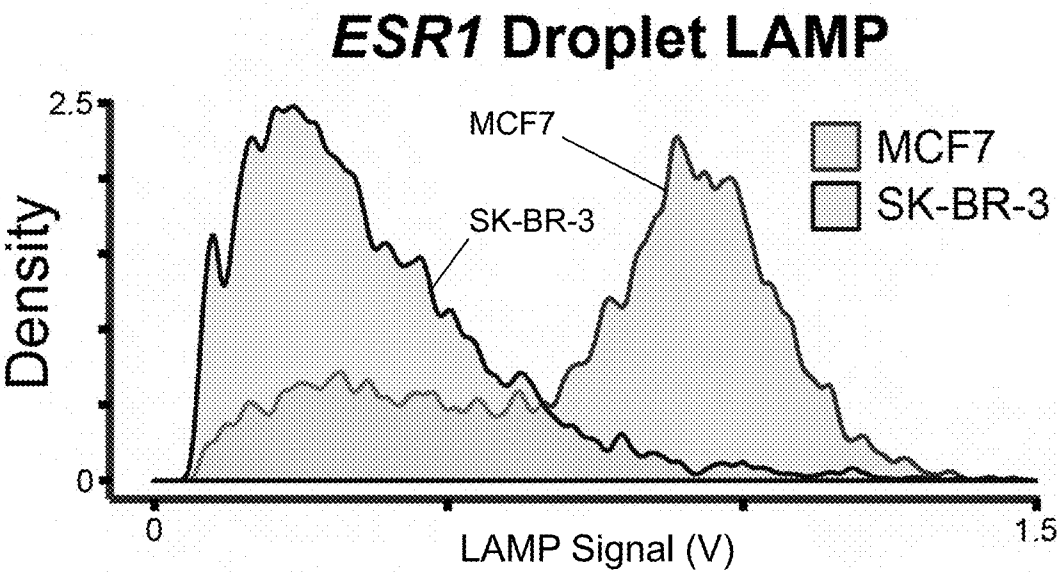

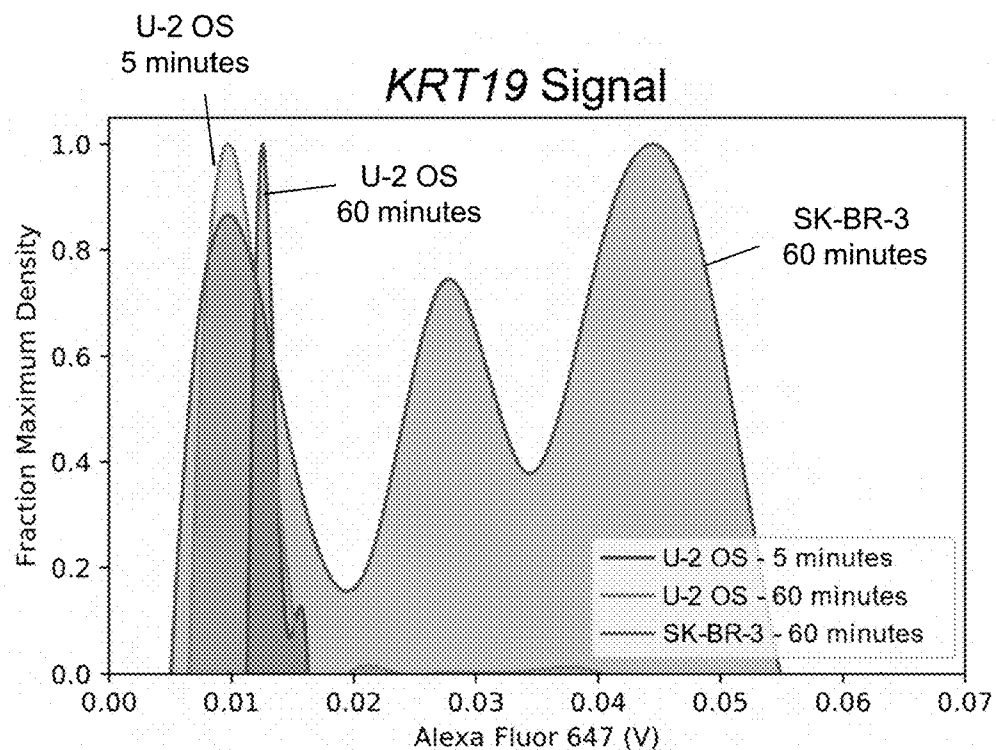

**FIG. 23A**

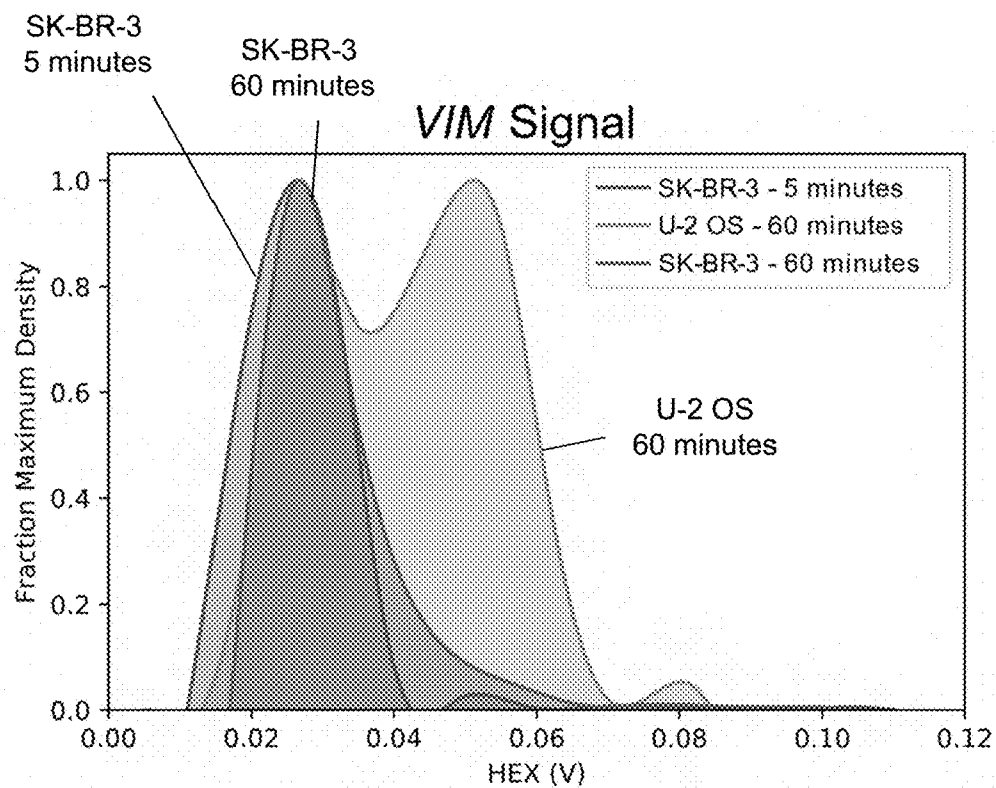

**FIG. 23B**

## Waste Outlet

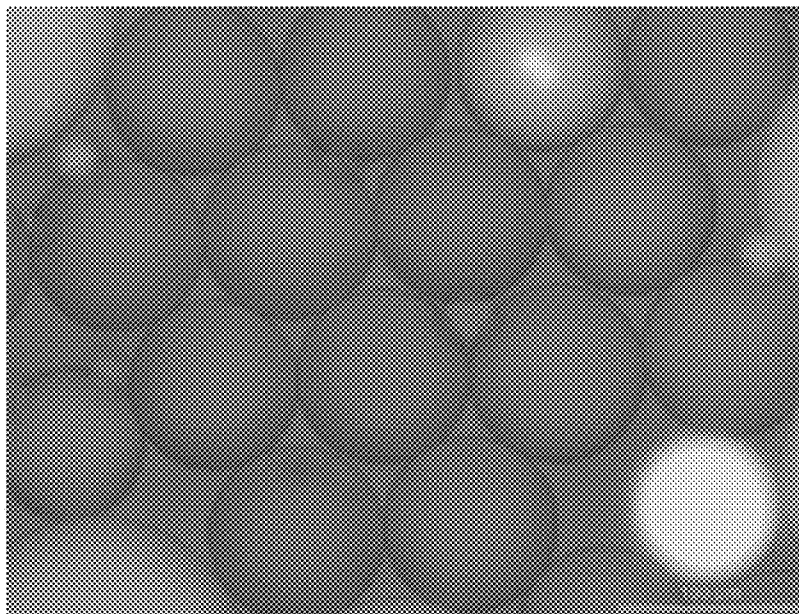


FIG. 24A

## Sorted Outlet


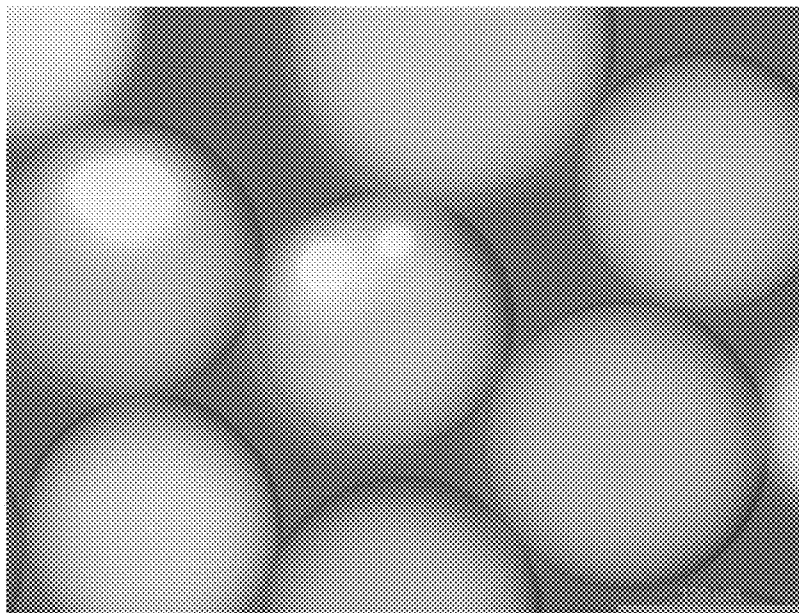


FIG. 24B



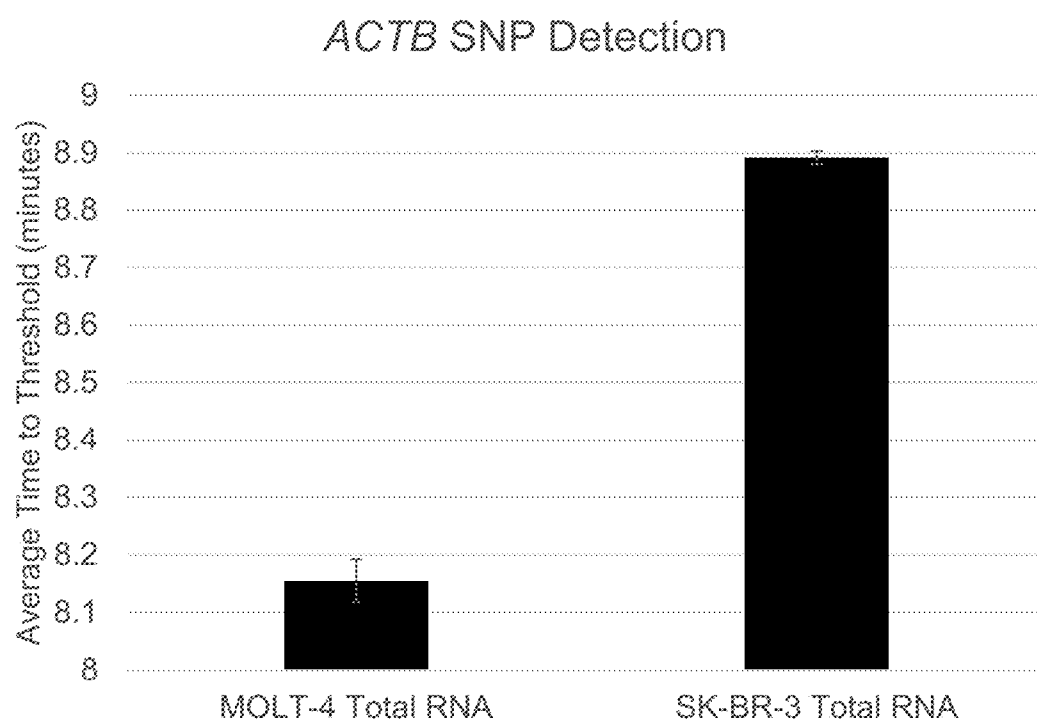

**FIG. 25**

## HIGH THROUGHPUT NUCLEIC ACID PROFILING OF SINGLE CELLS

### FIELD OF THE INVENTION

**[0001]** The invention is directed to high-throughput methods, systems, and devices for profiling the nucleic acid composition of single cells within a heterogeneous population of cells.

### BACKGROUND

**[0002]** Cellular heterogeneity and its impact on biological function and disease are becoming increasingly important for questions in human immunology, stem cell biology, and cancer research. By transcriptionally analyzing individual cells with reverse-transcriptase polymerase chain reaction (RT-PCR), for example, it is possible to identify rare cells or transient cell states that are unobservable when studying the entire population in bulk (Bendall et al. 2012, Kalisky and Blainey et al. 2011, Kalisky and Quake 2011, Levsky et al. 2003). However, obtaining meaningful information on these cells necessitates tools capable of high-throughput analysis. Current methods for manipulating, isolating, and transcriptionally profiling single cells with RT-PCR are cumbersome and limited in throughput, enabling the examination of just hundreds of individual cells.

**[0003]** The ultrahigh-throughput capability of droplet-based microfluidics is ideal for single-cell analysis applications (Guo et al. 2012, Novak et al. 2011, Vyawahare et al. 2010). These microfluidic techniques rely on microdroplets, tiny spheres of aqueous liquid ranging from 1 to 100  $\mu\text{m}$  in diameter, to encapsulate biological components in an oil-based emulsion (The et al. 2008). The drops serve, essentially, as very tiny “test tubes,” compartmentalizing millions of reactions. A major advantage of this approach is that a minimal amount of reagent is used, greatly reducing the cost for a given experiment. In addition, with microfluidic techniques, the drops can be formed, split, injected with reagent, and sorted at kilohertz rates, holding potential for performing millions of single-cell reactions at unprecedented throughput. However, an obstacle to realizing the potential of this approach is that, at concentrations of a single cell in a microdroplet, cell lysate is a potent inhibitor of RT-PCR (Arezi et al. 2010, Hedman et al. 2013, White et al. 2011).

**[0004]** To avoid cell lysate inhibition of RT-PCR, previous drop-based methods have utilized large droplets (2 nL) in which the lysate concentration is no longer inhibitory, or agarose droplets that can be solidified, rinsed, and stained with DNA dyes (Mary et al. 2011, Zhang et al. 2012). Methods using large droplets have only been able to analyze ~100 cells in total, while the agarose method is unable to use TaqMan probes or cell staining, precluding correlation of specific cell types with associated transcriptional targets. An alternative strategy for performing single-cell RT-PCR on cells is to isolate the cells in microwells fabricated into an elastomeric device. This approach allows robust and specific single-cell transcriptional profiling. However, because each microwell and its control valves must be fabricated and individually controlled, throughput is also limited to just a few hundred cells in total (Kalisky and Blainey et al. 2011, Kalisky and Quake 2011, White et al. 2013). Yet other strategies for performing single-cell RT-PCR on single cells is lyse cells in microdroplets and then dilute the microdroplets prior to RT-PCR (Eastburn et al. 2013). While this

dilution approach is effective, it is a highly cumbersome process that limits processivity.

**[0005]** To enable expression analysis of large numbers of cells in a heterogeneous population, new methods, systems, and devices are needed that combine the throughput of droplet-based microfluidic techniques with the specificity of microwell reactions. Aspects of the invention provided herein address these needs.

### SUMMARY OF THE INVENTION

**[0006]** One aspect of the invention is directed to methods of profiling a nucleic acid composition of a single cell. The methods comprise isolating the single cell in a liquid droplet, lysing the single cell in the liquid droplet to release template nucleic acid from the cell, amplifying the template nucleic acid in the liquid droplet to generate amplified nucleic acid, and detecting the amplified nucleic acid in the liquid droplet.

**[0007]** Another aspect of the invention is directed to polymerase-dependent logic gates. The polymerase-dependent logic gates can be used in the profiling methods of the invention.

**[0008]** Another aspect of the invention is directed to microfluidic systems for performing the profiling methods of the invention.

**[0009]** The objects and advantages of the invention will appear more fully from the following detailed description of the preferred embodiment of the invention made in conjunction with the accompanying drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

**[0010]** FIG. 1 shows a schematic of an exemplary version of a process of the invention.

**[0011]** FIG. 2 shows a schematic of an exemplary branch migration-mediated strand displacement reporter. The half arrowheads indicate 3' ends of depicted nucleic acid strands. In FIGS. 2-4, nucleic acid portions designated with a given number (e.g., “1”) are substantially identical to nucleic acid portions designated with the same number and are substantially complementary to nucleic acid portions designated with the same number and an asterisk (e.g., “1\*”).

**[0012]** FIG. 3 shows an exemplary branch migration-mediated strand displacement logic gate employing a YES logical operation. The half arrowheads indicate 3' ends of depicted nucleic acid strands.

**[0013]** FIG. 4 shows a schematic of an exemplary polymerase-dependent logic gate employing a YES logical operation. The half arrowheads indicate 3' ends of depicted nucleic acid strands.

**[0014]** FIG. 5 shows a schematic of an exemplary polymerase-dependent logic gate employing an OR logical operation. The half arrowheads indicate 3' ends of depicted nucleic acid strands.

**[0015]** FIG. 6 shows a schematic of an exemplary polymerase-dependent logic gate employing an AND logical operation. The half arrowheads indicate 3' ends of depicted nucleic acid strands.

**[0016]** FIGS. 7A-7D show a schematic of an alternative exemplary polymerase-dependent logic gate employing an AND logical operation. FIG. 7A shows components of the logic gate. FIG. 7B show operation of the logic gate in the presence of both of two targeted inputs. FIGS. 7C and 7D show operation of the logic gate in the presence of only one of the two targeted inputs. The half arrowheads indicate 3'

ends of depicted nucleic acid strands. The logic gate shown in FIG. 7A can constitute an inclusive-OR logical operation if the threshold strand is absent.

[0017] FIG. 8 shows a schematic of an exemplary polymerase-dependent logic gate employing an AND-NOT logical operation. The half arrowheads indicate 3' ends of depicted nucleic acid strands.

[0018] FIGS. 9A-9D show a schematic of an alternative exemplary polymerase-dependent logic gate employing an AND-NOT logical operation. The half arrowheads indicate 3' ends of depicted nucleic acid strands. FIG. 9A shows components of the logic gate. FIG. 9B shows operation of the logic gate in the presence of both of two targeted inputs, wherein the presence of input 2 negates the signal generated from the presence of input 1. FIGS. 9C and 9D show operation of the logic gate in the presence of only one of the two targeted inputs. The half arrowheads indicate 3' ends of depicted nucleic acid strands.

[0019] FIG. 10 shows a schematic of an exemplary polymerase-dependent logic gate employing a NOT logical operation. The half arrowheads indicate 3' ends of depicted nucleic acid strands.

[0020] FIG. 11 shows a schematic of an exemplary polymerase-dependent logic gate employing a YES logical operation that uses the 3' end of a LAMP dumbbell product as an input. The half arrowheads indicate 3' ends of depicted nucleic acid strands.

[0021] FIG. 12 shows an exemplary device suitable for performing the methods described herein.

[0022] FIG. 13 shows an exemplary device for sorting droplets, as performed in the methods described herein.

[0023] FIGS. 14A and 14B show effects of lysate on catalytic hairpin assembly (CHA) amplification. FIG. 14A shows high background using CHA in the presence of lysate. FIG. 14B shows concentration-dependent lysate inhibition. In FIG. 14A, error bars denote  $\pm 1$  standard deviation of the mean.

[0024] FIGS. 15A and 15B show RT-LAMP amplification of mRNA for the epithelial marker CK19 (KRT19) in CK19+ human breast cancer cells (SK-BR-3) versus CK19-leukocytes (MOLT-4). FIG. 15A shows amplification at a lysate concentration of  $10^6$  cells/mL, which is equivalent to the lysate concentration of a single cell in a microdroplet.

[0025] FIG. 15B shows amplification above and below a lysate concentration of  $10^6$  cells/mL. Error bars denote  $\pm 1$  standard deviation of the mean.

[0026] FIG. 16 shows fluorescent detection patterns of LAMP products of the epithelial phenotype marker KRT19 and/or the mesenchymal phenotype marker VIM using polymerase-dependent logic gates employing a YES logical operation, a NOT logical operation, an OR logical operation, an AND logical operation, or an AND-NOT logical operation. The YES logic gate was structured as shown in FIG. 4. The NOT logic gate was structured as shown in FIG. 10. The OR logic gate was structured as shown in FIGS. 7A-7D, with the threshold strand omitted. The AND logic gate was structured as shown in FIGS. 7A-7D. The AND-NOT logic gate was structured as shown in FIGS. 9A-9D.

[0027] FIGS. 17A and 17B show fluorescent detection of KRT19 RNA (FIG. 17A) or VIM RNA (FIG. 17B) using RT-LAMP with a multiplex primer format and YES nucleic acid logic gates structured as shown in FIG. 4. Error bars denote  $\pm 1$  standard deviation of the mean.

[0028] FIGS. 18A and 18B show fluorescent detection of KRT19 and/or VIM RNA using RT-LAMP and an OR logic gate (FIG. 18A) or an AND logic gate (FIG. 18B). The OR and logic gates were both structured as shown in FIGS. 7A-7D except that OR logic gate lacked a threshold strand. Error bars denote  $\pm 1$  standard deviation of the mean.

[0029] FIGS. 19A and 19B show fluorescent detection of KRT19 and/or VIM RNA using RT-LAMP and a NOT logic gate (FIG. 19A) or an AND-NOT logic gate (FIG. 19B). The NOT gate was structured as shown in FIG. 10, and the AND-NOT gate was structured as shown in FIGS. 9A-9D. Error bars denote  $\pm 1$  standard deviation of the mean.

[0030] FIGS. 20A and 20B show RT-LAMP amplification of mRNA for the epithelial marker CK19 (KRT19) in CK19+ human breast cancer cells (SK-BR-3) (FIG. 20A) versus CK19- leukocytes (MOLT-4) (FIG. 20B) in aqueous droplets suspended in fluorinated oil, using a dsDNA-specific dye to indicate amplification.

[0031] FIG. 21 shows a histogram of RT-LAMP amplification of the Estrogen Receptor (ER) mRNA transcript ESR1 in ER+ human breast cancer cells (MCF7) versus ER- breast cancer cells (SK-BR-3) in aqueous droplets suspended in fluorinated oil, using a dsDNA-specific dye to indicate amplification. Droplets were collected and heated in batch prior to detection.

[0032] FIG. 22 shows a histogram of RT-LAMP amplification of a glyceraldehyde 3-phosphate dehydrogenase (GAPDH) mRNA transcript in human leukocyte cell line MOLT-4 in aqueous droplets suspended in fluorinated oil, using a dsDNA-dependent dye to indicate amplification. Droplets were generated, incubated, and analyzed in an integrated microfluidic device implementing the entire workflow.

[0033] FIGS. 23A and 23B show histograms of RT-LAMP amplification of the epithelial marker CK19 (KRT19) and the mesenchymal marker VIM (VIM) using multiplexed and orthogonal YES logic gates and reporter complexes, where KRT19 amplification activates the Alexa Fluor 647 reporter, and VIM amplification activates the HEX reporter. FIG. 23A shows histograms for Alexa Fluor 647 signal with a human CK19- osteosarcoma cell line (U-2 OS) and a human CK19+ breast cancer cell line (SK-BR-3), after a 60-minute or 5-minute incubation. FIG. 23B shows histograms for HEX signal with a human VIM- breast cancer cell line (SK-BR-3) and a human VIM+ osteosarcoma cell line (U-2 OS), after a 60-minute or 5-minute incubation. Each YES gate was structured as shown in FIG. 4, and each reporter complex was structured as shown in FIG. 2.

[0034] FIGS. 24A and 24B show droplets collected from the waste outlet (FIG. 24A) or sorted outlet (FIG. 24B) of a droplet sorting device discriminating between human ER+ breast cancer line MCF7 and ER- breast cancer line SK-BR-3 based on ESR1 (ER) LAMP amplification.

[0035] FIG. 25 shows LAMP-based SNP detection in total RNA samples from two cell lines: SK-BR-3, with only WT ACTB transcripts (SEQ ID NO:1), and MOLT-4, which contains an A->C SNP at position 960 of an ACTB transcript (SEQ ID NO:2). Error bars denote  $\pm 1$  standard deviation of the mean.

#### DETAILED DESCRIPTION OF THE INVENTION

[0036] One aspect of the invention is directed to a method of profiling the nucleic acid composition of a single cell. The

method may comprise isolating the single cell in a liquid droplet, lysing the single cell in the liquid droplet to release template nucleic acid from the cell, amplifying the template nucleic acid in the liquid droplet to generate amplified nucleic acid, and detecting the amplified nucleic acid in the liquid droplet.

**[0037]** A schematic of an exemplary version of this process is shown in FIG. 1. The exemplary process is for profiling nucleated blood cells for the presence of circulating tumor cells (CTCs). The isolating in FIG. 1 is depicted as “encapsulation of single cells,” the lysing is depicted as “cell lysis,” the amplifying is depicted as “amplification,” and the detecting is depicted as “DNA-based logical computation” and “High-throughput fluorescence detection.” As shown in FIG. 1, the isolating, the lysing, the amplifying, and the detecting can all occur in a single network of channels in a continuous, high-throughput manner. This is contrasted with processes that conduct certain steps in batch. The channels can be microfluidic channels generated using any suitable method. An exemplary method is provided in the following examples. As used herein, “channels” refers to passages embedded in a solid device as well as exposed tubing.

**[0038]** The isolating may comprise isolating the cell in an aqueous liquid droplet suspended in a water-immiscible medium. This can be performed by feeding the cells through microfluidic channels in a continuous aqueous solution stream past inlets for the water-immiscible medium. The water-immiscible medium disrupts the continuous aqueous solution stream and “pinches off” distinct liquid droplets such that the liquid droplets become suspended in the water-immiscible medium. The cells can be present in the continuous aqueous solution stream at a low enough concentration such that one or fewer cells become isolated in per aqueous liquid droplet formed. The water-immiscible medium may comprise an oil. An exemplary oil is fluorinated oil, such as QX200™ Droplet Generation Oil for EvaGreen #1864005 (BioRad, Hercules, Calif.). Various surfactants present in the water-immiscible medium and/or the aqueous phase may help to stabilize the liquid droplets within the water-immiscible medium. The liquid droplets preferably have a volume of from about 1 pL to about 100 nL, such as a volume from about 10 pL to about 10 nL or from about 100 pL to about 1 nL. Amounts above and below these amounts are acceptable.

**[0039]** For downstream steps, such as the lysing, amplification, and detecting, each cell is preferably isolated in the liquid droplet with one or more reagents such as a lysis reagent, a DNA polymerase, amplification primers, deoxynucleotide triphosphates, RNase inhibitor, one or more nucleic acid logic gates, and a reporter. This can be performed by merging one or more solutions containing these reagents with a cell-containing solution upstream of where the droplets are formed. The solutions may form adjacent laminar flows prior to droplet formation. The solutions become co-encapsulated by the water-immiscible medium to form the droplet. Formation of the droplets thereby isolates individual cells with the reagents.

**[0040]** The lysis reagent isolated with the cell in the droplet may comprise a detergent. The detergent preferably comprises a non-denaturing detergent. The non-denaturing detergent preferably comprises a non-ionic detergent. Exemplary non-denaturing, non-ionic detergents include Tween 20 (Millipore Sigma, Burlington, Mass.), TRITON X-100 (Dow Chemical Company, Midland, Mich.) (4-(1,1,3,3-

Tetramethylbutyl)phenyl-polyethylene glycol, t-octylphenoxypolyethoxyethanol, polyethylene glycol tert-octylphenyl ether), NP-40 (nonyl phenoxypolyethoxyethanol), NONIDET P-40 (Shell Chemical Co., The Hague, The Netherlands) (octyl phenoxypolyethoxyethanol), and others. The detergent is preferably present in the liquid droplet at a concentration of from about 0.5% v/v to about 5% v/v, such as a concentration of from about 1% v/v to about 5% v/v or a concentration of about 2.5% v/v. The lysis reagent may alternatively or additionally comprise a lytic enzyme. Exemplary lytic enzymes include lysozyme and phage lysins. Suitable lysozyme concentrations of lysozyme include concentrations between about 1 kU/ml and 60 kU/ml, such as about 30 kU/ml. Concentrations above and below these amounts are also acceptable. Optimal concentrations of other particular lytic enzymes can be easily determined. A detergent should be sufficient to lyse most cells, particularly when heated. For cells with cell walls, such as certain types of bacteria, the lysis reagent preferably includes a detergent in addition to a lytic enzyme. In some versions of the invention, a lysis reagent is absent and cell lysis occurs by virtue of heating alone.

**[0041]** The polymerase isolated with the cell in the droplet can be any polymerase suitable for downstream amplification of the target nucleic acid. For amplification of DNA target nucleic acid, the polymerase is preferably a DNA-dependent DNA polymerase. DNA-dependent DNA polymerases are enzymes that catalyze the replication of DNA from a DNA template. An exemplary DNA-dependent DNA polymerase is Taq polymerase. For the amplification of RNA target nucleic acid, the polymerase is preferably a DNA- and RNA-dependent DNA polymerase or a combination of a DNA-dependent DNA polymerase with a separate RNA-dependent DNA polymerase. RNA-dependent DNA polymerases are enzymes that catalyze the production of DNA from a RNA template. RNA-dependent DNA polymerases are sometimes known as “reverse transcriptases.” DNA- and RNA-dependent DNA polymerases are enzymes that have both DNA-dependent DNA polymerase activity and RNA-dependent DNA polymerase (reverse transcriptase) activity. “Amplification” is used herein as is typically used in the art except that it is understood herein also to encompass the reverse transcription of an RNA target nucleic acid to DNA.

**[0042]** For the certain types of amplification, such as isothermal amplification, the polymerase additionally has strand displacement activity and lacks 5'→3" exonuclease activity. The polymerase may also contain or lack 3'→5' exonuclease activity. The polymerase is preferably thermostable. An exemplary polymerase is the Bst 2.0 DNA Polymerase (New England BioLabs, Inc., Ipswich, Mass.). This enzyme has RNA-dependent DNA polymerase (reverse transcriptase) activity, DNA-dependent DNA polymerase activity, and strand displacement activity and lacks 5'→3" exonuclease activity. Other polymerases with these characteristics are well-known in the art.

**[0043]** The amplification primers isolated with the cell in the droplet include any primers suitable for amplification of the nucleic acid template. A number of amplification methods and the design of suitable primers therefor are known in the art. The dNTPs serve as the building blocks for the amplified nucleic acids in the amplification.

**[0044]** The nucleic acid logic gate isolated with the cell in the droplet may comprise any one or more nucleic acid gates

suitable for profiling nucleic acids. Exemplary nucleic acid logic gates are known in the art and are described elsewhere herein.

**[0045]** The reporter isolated with the cell in the droplet may comprise any reagent suitable for indicating the presence of nucleic acids generally or particular nucleic acids specifically. Exemplary reporters are known in the art and are described elsewhere herein.

**[0046]** The lysing step may comprise heating the cell either in the presence or absence of a lysis reagent within the droplet. This step may be performed by heating the droplet containing the cell or the cell and lysis reagent. Heating the droplet may be performed by flowing the droplet containing the cell or the cell and lysis reagent through a heated zone. The heated zone may comprise an entire channel-containing device or subsections thereof. In some versions, a heating step is not required, as mixing the lysis reagent with the cell may be sufficient on its own to lyse the cell.

**[0047]** The amplifying may comprise amplifying a DNA template or reverse transcribing template RNA into DNA and amplifying the reverse transcribed DNA. The type of amplification used depends on the type of nucleic acid targeted for profiling. DNA templates, for example, will typically require only amplification of the DNA itself. RNA templates, by contrast, will typically require reverse transcription and DNA amplification.

**[0048]** The amplification method may comprise any method suitable for amplifying nucleic acids. Exemplary methods comprise PCR and isothermal amplification methods. Reverse transcription may be combined with PCR or the isothermal amplification method. Exemplary isothermal amplification methods include enzyme-free isothermal amplification methods and enzyme-dependent isothermal amplification methods. Exemplary enzyme-free isothermal amplification methods include hybridization chain reaction (HCR), catalytic hairpin assembly (CHA), and others. Exemplary enzyme-dependent isothermal amplification methods include loop-mediated isothermal amplification (LAMP), rolling circle amplification (RCA), multiple displacement amplification (MDA), recombinase polymerase amplification (RPA), nucleic acid sequence-based amplification (NASBA), among others.

**[0049]** The presence of lysis reagent and/or undiluted cell lysate during amplification can inhibit certain amplification methods such as PCR and enzyme-free isothermal amplification methods such as HCR and CHA. As shown in the following examples, LAMP was capable of producing a strong amplification signal in the presence of the lysis reagent and undiluted cell lysate. Thus, preferred amplification methods for performing in the presence of lysis reagent and/or undiluted cell lysate include enzyme-mediated isothermal amplification methods such as LAMP.

**[0050]** After nucleic acid amplification, the amplified nucleic acid can be detected by a number of methods. Preferred methods include fluorescent methods. The methods can include non-specific nucleic acid detection and specific nucleic acid detection.

**[0051]** Non-specific nucleic acid detection detects nucleic acid regardless of the particular sequence using a non-specific nucleic acid reporter, such as a non-specific fluorescent DNA reporter. Exemplary non-specific nucleic acid reporters include ethidium bromide, propidium iodide, crystal violet, dUTP-conjugated probes, DAPI (4',6-diamidino-2-phenylindole), 7-AAD (7-aminoactinomycin D), Hoechst

33258, Hoechst 33342, Hoechst 34580, PICOGREEN (Molecular Probes, Inc., Eugene, Oreg.), Helixyte (AAT Bioquest, Sunnyvale, Calif.), YOYO-1, DiYO-1, TOTO-1, DiTO-1, and SYBR dyes (Molecular Probes, Inc., Eugene, Oreg.), such as SYBR Green I, SYBR Green II, SYBR Gold, etc. Many of these non-specific nucleic acid reporters are DNA intercalating agents.

**[0052]** Specific nucleic acid detection detects species of nucleic acid having a particular sequence with a sequence-specific nucleic acid reporter, such as a sequence-specific fluorescent nucleic acid reporter. A number of sequence-specific nucleic acid fluorescent reporters are known in the art. Exemplary sequence-specific fluorescent nucleic acid reporters include quenched reporters that release the quencher upon binding to a particular sequence. An example of a sequence-specific fluorescent nucleic acid reporter is shown in FIG. 2. This reporter is configured to operate through branch migration-mediated strand displacement. The reporter comprises a quencher strand 22 (black) annealed to a substantially complementary reporter strand 20 (red). The quencher strand 22 comprises a quencher 23 (Q). The reporter strand 20 comprises a fluorophore 21 (F). Annealing of the quencher strand 22 to the reporter strand 20 places the quencher 23 in close proximity to the fluorophore 21, thereby quenching any fluorescence emitted from the fluorophore 21. The reporter strand 20 anneals only to a first portion (1\*) of the quencher strand 22, leaving a second portion (2\*) of the quencher strand 22, referred to as a toehold, exposed. The quencher strand 22 is designed to be substantially complementary to an input strand 24 (blue). The input strand 24 is a nucleic acid intended to be detected. The input strand 24 comprises a portion (2) substantially complementary to the toehold (1\*). When present, the input strand 24 binds to the toehold via the substantially complementary portion and displaces the reporter strand 20 from the quencher strand 22 upon annealing to the remainder of the quencher strand 22. Displacement of the reporter strand 20 removes the fluorophore 21 from the proximity of the quencher 23, thereby resulting in an activated reporter (shown as “output” in FIG. 2). The activated reporter can then fluoresce upon excitation with light. In alternative versions, the reporter strand is substantially complementary to the input strand and comprises a toehold such that binding of the input strand to the toehold on the reporter strand followed by branch migration displaces the quencher strand from the reporter strand. The resulting input strand/reporter strand duplex is then capable of fluorescing.

**[0053]** The detection may comprise profiling the composition of amplified nucleic acids by performing a molecular logical computation using a molecular logic circuit. The molecular logic circuit inputs one or more particular species of nucleic acid, performs a logical computation, and outputs one or more different species of nucleic acid. The molecular logic circuit comprises one or more nucleic acid logic gates used alone or in various combinations. As used herein, “molecular logical computation” or “molecularly computing” refers to the production of one or more output nucleic acids (e.g., output strands) from one or more nucleic acid logic gates in response to one or more input nucleic acids (e.g., input strands). “Production” in this context refers to the displacement of the output nucleic acid from a nucleic acid logic gate such that the output nucleic acid can be detected or used as an input for one or more downstream nucleic acid logic gates, as described in further detail below.

The molecular logic circuit may be a DNA-based molecular logic circuit containing one or more DNA logic gates, an RNA-based molecular logic circuit containing one or more logic gates, or a combination thereof.

**[0054]** Each logic gate is configured to perform a specific logical operation. Exemplary logical operations include YES, NOT, AND, OR, AND-NOT, NOT-AND, NOT-OR, EXCLUSIVE-OR, EXCLUSIVE-NOR, and IMPLY.

**[0055]** YES and NOT gates are each configured for profiling a single input.

**[0056]** A YES gate produces an output (1) if and only if the input is in high abundance. This means that the gate fails to produce an output (0) if the input is not in high abundance. A YES gate may also be referred to as a “transducer.” A logical operation performed by a YES gate for input A is shown in the following truth table:

YES gate	
A	A
1	1
0	0

**[0057]** The NOT gate is a circuit that produces an inverted version of the input at its output. It is also known as an inverter. If the input variable is A, the inverted output is NOT A. This is also shown as A', or A with a bar over the top. A logical operation performed by a NOT gate for input A is shown in the following truth table:

NOT gate	
A	$\bar{A}$
0	1
1	0

**[0058]** The AND, OR, AND-NOT, NOT-AND, NOT-OR, EXCLUSIVE-OR, and EXCLUSIVE-NOR operations are each configured for profiling multiple inputs.

**[0059]** The AND gate is configured to give a high output (1) only if all its inputs are high and otherwise fails to produce a high output (0). A dot (.) is used to show the AND operation: A.B. The dot is sometimes omitted: AB. A logical operation performed by an AND gate for inputs A and B is shown in the following truth table:

2 Input AND gate		
A	B	A.B
0	0	0
0	1	0
1	0	0
1	1	1

**[0060]** An OR gate (otherwise known as an INCLUSIVE-OR gate) is configured to give a high output (1) if one or more of its inputs are high. A plus (+) is used to show the OR operation. A logical operation performed by an OR gate for inputs A and B is shown in the following truth table:

2 Input OR gate		
A	B	A + B
0	0	0
0	1	1
1	0	1
1	1	1

**[0061]** A NOT-AND (NAND) gate is equal to an AND gate followed by a NOT gate. The outputs of all NAND gates are high (1) if any of the inputs are low (0). A logical operation performed by a NAND gate for inputs A and B is shown in the following truth table:

2 Input NAND gate		
A	B	$\overline{A.B}$
0	0	1
0	1	1
1	0	1
1	1	0

**[0062]** An AND-NOT gate detects the presence of only one of two possible inputs. The outputs of AND-NOT gates are high (1) if one and only one of two possible inputs are high (1) and low (0) if any other conditions obtain. A truth table for an AND-NOT gate in which input B is negated (A AND-NOT B) is as follows:

2 Input AND-NOT gate		
A	B	Output
0	0	0
0	1	0
1	0	1
1	1	0

**[0063]** A NOT-OR (NOR) gate is equal to an OR gate followed by a NOT gate. The outputs of all NOR gates are low (0) if any of the inputs are high (1). A logical operation performed by a NOR gate for inputs A and B is shown in the following truth table:

2 Input NOR gate		
A	B	$\overline{A+B}$
0	0	1
0	1	0
1	0	0
1	1	0

**[0064]** An EXCLUSIVE-OR (EXOR) gate is configured to give a high output if either, but not both, of its two inputs are high (1). An encircled plus sign is used to show the EXOR operation. A logical operation performed by an EXCLUSIVE-OR gate for inputs A and B is shown in the following truth table:

2 Input EXOR gate		
A	B	$A \oplus B$
0	0	0
0	1	1
1	0	1
1	1	0

**[0065]** An EXCLUSIVE-NOR (EXNOR) gate does the opposite of the EXOR gate. The EXCLUSIVE-NOR gate is configured to give a high output if both of two inputs are high (1) or if both of two inputs are low (0). It gives a low output if either, but not both, of its two inputs are high. A logical operation performed by an EXCLUSIVE-NOR gate for inputs A and B is shown in the following truth table:

2 Input EXNOR gate		
A	B	$\overline{A \oplus B}$
0	0	1
0	1	0
1	0	0
1	1	1

**[0066]** An IMPLY gate employs a CONDITIONAL logical operation, by conveying “if-then” logic.

**[0067]** Nucleic acid logic gates configured to perform logical operations are known in the art. See, e.g., Baccouche et al. 2014, Chen et al. 2015, Deng et al. 2014, Li et al. 2011, Li et al. 2013, Li et al. 2016, Massey et al. 2017, Okamoto et al. 2004, Qian and Winfree **2011**, Qian and Winfree et al. 2011, Ravan et al. 2017, Thubagere et al. 2017, Wei et al. 2016, Xu et al. 2014, Yang et al. 2013, Yang et al. 2016, Yang et al. 2014, Yao et al. 2015, Zhang et al. 2010, Zhu et al. 2013, Zou et al. 2017, US 2007/0072215, and WO 2017/141068.

**[0068]** Exemplary logic gates operate through branch migration-mediated strand displacement, also known as toehold-mediated branch migration or random-walk branch migration. A schematic of an exemplary branch migration-mediated strand displacement logic gate employing a YES logical operation is shown in FIG. 3. The logic gate comprises an output strand 33 (brown strand) annealed to a substantially complementary gate strand 32 (blue). An input strand 31 (green) that is substantially complementary to the gate strand 32 binds to an exposed toehold (3\*) portion of the gate strand 32 and subsequently displaces the output strand 33 upon further annealing to the gate strand 32. The branch migration-mediated strand displacement mechanism can be configured to generate logic gates employing other operations, such as NOT, AND, OR, NOT-AND, NOT-OR, EXCLUSIVE-OR, EXCLUSIVE-NOR operations, among others. See, e.g., the references provided above.

**[0069]** Other exemplary logic gates include polymerase-dependent logic gates. Polymerase-dependent logic gates require polymerase-mediated extension of an input strand along a gate strand to displace an output strand from the gate strand. These logic gates are designed to operate with polymerases that have strand displacement activity and lack 5'→3' exonuclease activity. A schematic of an exemplary polymerase-dependent logic gate employing a YES logical operation is shown in FIG. 4. The polymerase-dependent

logic gate comprises an output strand 43 (brown) annealed to a gate strand 42 (blue). The output strand 43 anneals to an output-strand annealing portion (2\*) of the gate strand 42. The output strand 43 does not anneal to an output-strand non-annealing portion (1\*) of the gate strand 42, leaving an exposed portion on the gate strand 42. The output-strand annealing portion is closer to the 5' end of the gate strand 42 (brown) than the output-strand non-annealing portion. An input strand 41 (green) anneals to an input-strand annealing portion (1\*) of the gate strand 42. In the example in FIG. 4, the input-strand annealing portion of the gate strand 42 is the same as the output-strand non-annealing portion, but it does not have to be so. The input strand 41 does not anneal to an input-strand non-annealing portion (2\*) of the gate strand 42. In the example in FIG. 4, the input-strand non-annealing portion of the gate strand 42 is the same as the output-strand annealing portion, but it does not have to be so. Mere binding of the input strand 41 to the input-strand annealing portion of the gate strand 42 is on its own insufficient to displace the output strand 43 from the gate strand 42. Extension of the input strand 41 along the gate strand 42 must occur to displace the output strand 43 from the gate strand 42. The output strand 43 can then be directly detected with a reporter gate or serve as input for one or more additional logic gates.

**[0070]** The input-strand non-annealing portion of the gate strand does not have to be the same as the output-strand annealing portion. In order for there to be an exposed portion near the 3' end of the input strand to facilitate binding of the input strand, however, the input-strand annealing portion and the output-strand non-annealing portion at least partially overlap. In some versions, the input-strand annealing portion is a sub-portion of the output-strand non-annealing portion. For binding of the input strand not to be sufficient to displace the output strand (i.e., for extension of the input strand along the gate strand to be necessary for displacement of the output strand), the output-strand annealing portion and the input-strand non-annealing portion at least partially overlap. In some versions, the output-strand annealing portion and the input-strand annealing portion at least partially overlap. Too much overlap, however, will induce displacement of the output strand merely by the input strand binding to the exposed portion on the gate strand without requiring polymerase-mediated extension of the input strand. Thus, any overlap between the output-strand annealing portion and the input-strand annealing portion is an amount less than that sufficient for the input strand to displace the output strand without polymerase-mediated extension. In preferred versions of the invention, the output-strand annealing portion and the input-strand annealing portion do not overlap. This is thought to permit faster binding kinetics between the input strand and the gate strand.

**[0071]** In some versions, the input-strand annealing portion of the gate strand can serve as a primer for an amplification reaction, wherein the input-strand annealing portion binds to a sequence on a template nucleic acid. In some versions, the amplification reaction is LAMP. The gate strand can serve as a forward internal primer (FIP) or a backward internal primer (BIP) in the LAMP reaction. Amplification from the forward outer primer (FP) and/or backward outer primer (BP), respectively, can displace an output strand initially bound to the gate strand.

**[0072]** The polymerase-dependent logic gates can be configured to perform any of the logical operations described

herein, including the YES, NOT, AND, OR, AND-NOT, NOT-AND, NOT-OR, EXCLUSIVE-OR, EXCLUSIVE-NOR, and IMPLY operations, among others.

**[0073]** An exemplary polymerase-dependent OR logic gate is shown in FIG. 5. The input-strand annealing portion of the gate strand **53** (green) has a first input-strand annealing portion (01\*) and a second input-strand annealing portion (02\*). The first input-strand annealing portion is substantially complementary to and anneals to a first input strand **51** (red). The second input-strand annealing portion (02\*) is substantially complementary to and anneals to a second input strand **52** (teal). Annealing of either or both of the first **51** and second **52** input strands induces polymerase-mediated extension thereof and displaces the output strand **54** (blue) from the gate strand.

**[0074]** An exemplary polymerase-dependent AND logic gate is shown in FIG. 6. This logic gate has a gate strand **63** (green) without a pre-annealed output strand and instead employs an output strand **64** (red/blue) that is generated in situ. As with the OR logic gate, the input-strand annealing portion (02\*01\*) of the gate strand **63** has a first input-strand annealing portion (01\*) and a second input-strand annealing portion (02\*). The first input-strand annealing portion (01\*) is substantially complementary to and anneals to a first input strand **61** (red). The second input-strand annealing portion (02\*) is substantially complementary to and anneals to a second input strand **62** (teal). The output strand **64** is generated in situ through binding of the first input strand **61** to the first input-strand annealing portion and polymerase-mediated extension of the first input strand **61** along the gate strand. The generated output strand **64** is then displaced upon binding of the second input strand **62** to the second input-strand annealing portion and extension of the second input strand to generate an extended input strand **65** (teal/red/blue).

**[0075]** An alternative exemplary polymerase-dependent AND logic gate is shown in FIGS. 7A-7D. This logic gate includes at least two distinct gate strands **73,74** (green, fuschia), output strands **75** (blue), and a threshold strand **76**. “Distinct” used with reference to nucleic acid means that the nucleic acids have different nucleotide sequences. The output strands **75** are initially bound to the gate strands **73,74** but are substantially complementary to and are capable of annealing to the threshold strand **76**. The threshold strand **76** each of the at least two distinct gate strands **73,74** with the output strands **75** bound thereto are present in a substantially equimolar concentration. “Substantially equimolar” in this context refers to equimolar amounts or a molar excess of one strand over each other relevant strand less than about 40%, less than about 35%, less than about 30%, less than about 25%, less than about 20%, less than about 15%, less than about 10%, less than about 5%, less than about 4%, less than about 3%, less than about 2%, or less than about 1%. A slight molar excess of the threshold strand over each of the at least two distinct gate strands **73,74** with the output strands **75** bound thereto is acceptable. The slight excess may be a molar excess less than about 40%, less than about 35%, less than about 30%, less than about 25%, less than about 20%, less than about 15%, less than about 10%, less than about 5%, less than about 4%, less than about 3%, less than about 2%, or less than about 1%. In the present example, the output strands **75** for each of the two gate strands **73,74** are identical. However, they need not be identical, so long as they each have a portion that is capable of binding to the

threshold strand **76** (and any downstream logic gate or reporter gate), and are therefore substantially identical. The input-strand annealing portion of a first **73** (green) of the at least two distinct gate strands **73,74** anneals to a first **71** (red/Input 1) of at least two distinct input strands **71,72** but not to a second **72** (teal/Input 2) of the at least two distinct input strands **71,72**. The input-strand annealing portion of a second **74** (fuschia) of the at least two distinct gate strands **73,74** anneals to the second **72** (teal/Input 2) of the at least two distinct input strands **71,72** but not to the first **71** (red/Input 1) of the at least two distinct input strands **71,72**. As shown in FIG. 7C and FIG. 7D, the presence of only one of the two input strands **71,72** displaces an amount of output strand **75** (1×) that is less than or equal to the amount of threshold strand **76**. The threshold strand **76** thus binds to all of the displaced output strand **75** and quarantines it from detection or further signaling through downstream logic gates. As shown in FIG. 7B, however, the presence of both of the two input strands **71,72**, displaces an amount of output strand **75** (2×) that is greater than the amount of threshold strand **76**. The threshold strand **76** is therefore capable of binding only to subset of the displaced output strand **75**, leaving a second subset free for detection or further signaling through downstream logic gates. If the threshold strand **76** is omitted, then activation of either transducer **73,75** or **74,75** is sufficient to produce free output strand **75** (blue), and this forms an alternative, exemplary OR gate.

**[0076]** An exemplary polymerase-dependent AND-NOT logic gate is shown in FIG. 8.

**[0077]** This logic gate comprises at least two distinct gate strands **83,84** (green, fuchsia). Each gate strand **83,84** is bound to a distinct output strand **85,86** (blue, red, respectively). The output strands **85,86** are substantially complementary to each other and are capable of annealing to each other once displaced from the gate strands **83,84**. The input-strand annealing portion of a first **83** (green) of the at least two distinct gate strands **83,84** anneals to a first **81** (red/Input 1) of at least two distinct input strands **81,82** but not to a second **82** (teal/Input 2) of the at least two distinct input strands **81,82**. The input-strand annealing portion of a second **84** (fuchsia/Input 2) of the at least two distinct gate strands **83,84** anneals to the second **82** (fuchsia/Input 2) of the at least two distinct input strands **81,82** but not to the first **81** (teal/Input 2) of the at least two distinct input strands **81,82**. When only one **81** (teal/Input 2 or fuchsia/Input 2) of the two distinct input strands **81,82** is present, the output strand **85** or **86** (blue or red, respectively) is displaced and can be detected or used for signaling in downstream logic gates. When both of the input strands **81,82** (teal/Input 2 and fuchsia/Input 2) are present, the displaced output strands **85,86** anneal to each other when released from the gate strands **83,84** and quarantine each other from detection or signaling in downstream logic gates.

**[0078]** An alternative exemplary polymerase-dependent AND-NOT logic gate is shown in FIGS. 9A-9D. As shown in FIG. 9A, this logic gate comprises a gate strand **116** (green) comprising a site (Input 1\*) capable of binding to a first input strand **114** (red/Input 1). The gate strand **116** is initially bound to an output strand **115** (blue). The output strand **115** (blue) is substantially complementary to a reporter strand **118** (black), and additionally includes a site (Input 2\*) capable of binding to a second input strand **119** (fuchsia/Input 2). The input-strand annealing portion of the gate strand **116** anneals to the first input strand **114** (red/



Input 1) but not to the second input strand **119** (fuschia/Input 2). When only the second input strand **119** (fuschia/Input 2) is present, as shown in FIG. 9D, no reaction occurs. However, when only the first input strand **114** (red/Input 1) is present, as shown in FIG. 9C, the output strand **115** (blue) is displaced upon polymerization of the first input strand **114** (red/Input 1) and can be detected or used for signaling in downstream logic gates. In this example, the output strand **115** binds to a toehold region of reporter strand **118** (black), displacing quencher strand **117** (black), and producing a fluorescent signal. (The output strand **115** could alternatively bind to the quencher strand **117** (black) or to either a reporter strand or a quencher strand of a polymerase-dependent reporter gate, depending on the desired format.) When the second input strand **119** (fuschia/Input 2) is also present, as in FIG. 9B, the output strand **115** anneals to the second input strand **119** (fuschia/Input 2), and reporter strand **118** (black) is displaced from output strand **115** upon polymerization of the second input strand **119** (fuschia/Input 2). Displaced reporter strand **118** then binds to displaced quencher strand **117**, removing the fluorescent signal.

**[0079]** Another exemplary polymerase-dependent NOT logic gate is shown in FIG. 10. This logic gate comprises an activated output complex comprising a reporter strand **118** (black) serving as an output strand and a gate strand **115** (blue). The gate strand **115** (blue) is substantially complementary to input strand **119** (fuschia) at portion Input\*. In its initial state, reporter strand **118** is not bound to a quenching moiety and therefore yields a fluorescent signal. When input strand **119** binds output strand **115**, it displaces reporter strand **118** upon polymerization. Displaced reporter strand **118** can then bind to quencher strand **117** (black), which can be referred to as a “NOT strand,” to quench the fluorescent signal. In this example, strands **118** and **117** comprise a fluorophore-quencher reporter complex, but in principle this NOT operation can act on any reversible logic gate or output strand, wherein strands **118** and **117** could be devoid of a fluorophore or quencher, strand **117** could constitute an output strand from another gate or any other strand substantially complementary to strand **118**, and binding of strand **118** with strand **117** would effectively quarantine strand **118** and prevent downstream signaling. Similar to the embodiment above, the output strand **115** could alternatively bind to the quencher strand **117** (black) or to either a reporter strand or a quencher strand of a polymerase-dependent reporter gate, thereby making the initially non-bound member of the reporter gate the NOT strand.

**[0080]** Exemplary lengths of the gate strand in the polymerase-dependent logic gates include lengths of from about 4, about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50 or more nucleotide bases to about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50, about 60, about 70, about 80, about 90, about 100, about 150, about 200, about 250, about 300 or more nucleotide bases.

**[0081]** Exemplary lengths of the output-strand annealing portion of the gate strand in the polymerase-dependent logic gates include lengths of from about 2, about 4, about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50 or more nucleotide bases to about 5, about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50, about 60, about 70, about 80, about 90, about 100, about 150, about 200, about 250, about 300 or more nucleotide bases.

**[0082]** Exemplary lengths of the output-strand non-annealing portion of the gate strand in the polymerase-dependent logic gates include lengths of from about 1, about 2, about 4, about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50 or more nucleotide bases to about 5, about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50, about 60, about 70, about 80, about 90, about 100, about 150, about 200, about 250, about 300 or more nucleotide bases.

**[0083]** Exemplary lengths of the input-strand annealing portion of the gate strand in the polymerase-dependent logic gates include lengths of from about 1, about 2, about 4, about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50 or more nucleotide bases to about 5, about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50, about 60, about 70, about 80, about 90, about 100, about 150, about 200, about 250, about 300 or more nucleotide bases.

**[0084]** Exemplary lengths of the output strand in the polymerase-dependent logic gates include lengths of from about 2, about 4, about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50 or more nucleotide bases to about 5, about 10, about 15, about 20, about 25, about 30, about 35, about 40, about 45, about 50, about 60, about 70, about 80, about 90, about 100, about 150, about 200, about 250, about 300 or more nucleotide bases.

**[0085]** The input strand in any polymerase-dependent logic gate can comprise a species of the amplified nucleic acid or can comprise an output strand from an upstream logic gate in the circuit. When employing LAMP, for example, the input strand can comprise a LAMP amplification product, such as a portion of a LAMP dumbbell product. A 3' portion of the LAMP dumbbell product, for example, can bind to the input-strand annealing portion of a gate strand. A schematic of such a mechanism is shown in FIG. 11, wherein a LAMP dumbbell product **91** serves as an input strand. A 3' portion of the LAMP dumbbell product **91** binds to and extends along a gate strand **92** to generate an extended input strand **93**, thereby displacing an output strand **94** from the gate strand **92**.

**[0086]** The output strand in any polymerase-dependent logic gate can comprise an input strand for a downstream logic gate or an input strand for a reporter gate.

**[0087]** A reporter gate configured to detect an output strand can comprise a branch migration-mediated strand displacement reporter as shown in FIG. 2 or a polymerase-dependent reporter gate. A polymerase-dependent reporter gate can be generated by placing a fluorophore on the gate strand **42** (such as on the 5' end) and a quencher on the output strand **43** (such as on the 3' end) of a polymerase-dependent logic gate as shown in FIG. 4, thereby generating a reporter strand and a quencher strand. Alternatively, a polymerase-dependent reporter gate can be generated by placing a fluorophore on the output strand **43** (such as on the 5' end) and a quencher on the gate strand **42** (such as on the 3' end) of a polymerase-dependent logic gate as shown in FIG. 4, thereby generating a reporter strand and a quencher strand. In either case, binding and polymerase-mediated extension of an input strand will displace the quencher strand from the reporter strand and permit fluorescence to be detected from the fluorophore.

**[0088]** As used herein, “identical” refers to nucleic acid sequences that are the same. “Substantially identical” refers

to nucleic acids sequences that are identical or sufficiently identical as to bind to a same third nucleic acid sequence under conditions suitable for enzyme-dependent isothermal amplification, such as loop-mediated isothermal amplification (LAMP). Substantial identity therefore encompasses identity, and any embodiment described herein as having substantial identity can therefore have identity. “Complementary” refers to nucleic acid sequences that have perfect base pairing. “Substantially complementary” refers to nucleic acid sequences that have perfect base pairing (complementarity) or sufficient base pairing as to bind to each other under conditions suitable for enzyme-dependent isothermal amplification, such as LAMP. Substantial complementarity therefore encompasses complementarity, and any embodiment described herein as having substantial complementarity can therefore have complementarity (perfect base pairing). In any embodiment described herein, the identity, substantial identity, complementarity or substantial complementarity can occur over a length of 2-200 bases or more, such as at least 2, at least 3, at least 4, at least 5, at least 6, at least 7, at least 8, at least 9, at least 10, at least 11, at least 12, at least 13, at least 14, at least 15, at least 16, at least 17, at least 18, at least 19, at least 20, at least 21, at least 22, at least 23, at least 24, at least 25, at least 26, at least 27, at least 28, at least 29, at least 30, at least 31, at least 32, at least 33, at least 34, at least 35, at least 36, at least 37, at least 38, at least 39, at least 40, at least 41, at least 42, at least 43, at least 44, at least 45, at least 46, at least 47, at least 48, at least 49, at least 50, at least 60, at least 70, at least 80, at least 90, at least 100, at least 110, at least 120, at least 130, at least 140, at least 150, at least 160, at least 170, at least 180, or at least 190 to at least 3, at least 4, at least 5, at least 6, at least 7, at least 8, at least 9, at least 10, at least 11, at least 12, at least 13, at least 14, at least 15, at least 16, at least 17, at least 18, at least 19, at least 20, at least 21, at least 22, at least 23, at least 24, at least 25, at least 26, at least 27, at least 28, at least 29, at least 30, at least 31, at least 32, at least 33, at least 34, at least 35, at least 36, at least 37, at least 38, at least 39, at least 40, at least 41, at least 42, at least 43, at least 44, at least 45, at least 46, at least 47, at least 48, at least 49, at least 50, at least 60, at least 70, at least 80, at least 90, at least 100, at least 110, at least 120, at least 130, at least 140, at least 150, at least 160, at least 170, at least 180, at least 190, at least 200 or more bases.

**[0089]** In the methods described herein, the isolating can occur prior to the lysing, the lysing can occur prior to the amplifying, and/or the amplifying can occur prior to the detecting. In preferred versions, the liquid droplet remains at a substantially constant volume throughout and between each of the lysing, the amplifying, and the detecting. In preferred versions, the lysing, the amplifying, and the detecting all occur without diluting the liquid droplet, adding additional reagents to the liquid droplet, and/or removing reagents or liquid from the liquid droplet after the isolating.

**[0090]** The lysing, the amplifying, and/or the molecular logical computation in some versions are performed at substantially the same temperature. “Substantially same temperature” refers to a temperature range spanning about 50° C., about 45° C., about 40° C., about 35° C., about 30° C., about 25° C., about 20° C., about 20° C., about 15° C., about 10° C., about 5° C. or less.

**[0091]** The lysing, the amplifying, and/or the molecular logical computation in some versions are performed at a

substantially constant temperature. “Substantially constant temperature” refers to temperature maintained over time within a range of about 50° C., about 45° C., about 40° C., about 35° C., about 30° C., about 25° C., about 20° C., about 20° C., about 15° C., about 10° C., about 5° C. or less.

**[0092]** In some versions, a substantially constant temperature is maintained throughout and between each of the lysing, the amplifying, and/or performing the molecular logical computation.

**[0093]** The lysing, the amplifying, and the molecular logical computation in some versions are performed at a temperature of from about 45° C., about 50° C., about 55° C., or about 60° C. to about 70° C., about 75° C., about 80° C., about 85° C., or about 90° C.

**[0094]** The methods described herein can be used to profile a number of aspects of the nucleic acid composition of a single cell using the cell’s RNA or DNA as a nucleic acid template. The methods, for example, can be used in expression profiling to characterize the expression pattern of the cell’s mRNA or miRNA. Certain cell types, such as circulating tumor cells (CTCs) or cells having particular lineages, have distinguishable expression patterns. See, e.g., Sieuwerts et al. 2011. The methods of the invention can be used to distinguish CTCs from non-CTCs, or cells of one lineage from cells of another lineage. The methods of the invention can also be used to detect certain genetic mutations in a cell, such as single nucleotide polymorphisms (SNPs) or other types of mutations. See, e.g., Yongkiettrakul et al. 2016 and Badolo et al. 2012 for appropriate LAMP primer design for detecting SNPs.

**[0095]** An exemplary device **100** suitable for performing the methods described herein is shown in FIG. **12**. The device **100** comprises a single, continuous network of microfluidic channels **101** and tubing **107**, in combination with a number of additional elements. The additional elements include a cell-solution inlet **102**, reagent-solution inlets **103**, an oil inlet **104**, a droplet former **105**, an oil extractor **106**, an incubation section comprising tubing **107** running through a heating element **109**, an oil injector **110**, a laser **111**, and a fluorescence detector **112**. Cell solution and reagent solutions are introduced in the channels via the cell-solution inlet **102** and the reagent-solution inlets **103**, respectively. The cell solution can include any collection of cells desired to be profiled. The reagent solution can include any reagent described herein such as a lysis reagent, a DNA polymerase, amplification primers, deoxynucleotide triphosphates, RNase inhibitors, one or more nucleic acid logic gates, and one or more reporters, or any other reagent. The device can optionally include more than one reagent-solution inlets **103**, such as two, three, or more, for introducing the reagents separately (see the examples). The cell solution and reagent solution(s) merge upstream of the droplet former **105** to form a cell-and-reagent solution. The cell-and-reagent solution may comprise laminar flows of each of the cell solution and reagent solution(s). The cell-and-reagent solution flows to the droplet former **105**. The droplet former **105** includes oil channels connected to the oil inlet **104** that inject oil perpendicularly into the aqueous flow. The injected oil separates the cell-and-reagent solution into aqueous droplets suspended in the oil. The droplets are then compacted in the oil by flowing past the oil extractor **106**, which removes some of the oil surrounding the droplets using suction. The compacted droplets flow into the incubation section. The length of tubing section **107** determines the

time each droplet spends in the incubation section to allow controlled cell lysis, nucleic acid template amplification, and logical computation with the nucleic acid logic gates. Heating of the tubing **107** by the heating element **109** facilitates the cell lysis and amplification. The heating element **109** may heat the entire device **100** or any sub-portion thereof, such as the incubation section. The droplets are then decompacted within the channel by virtue of the oil injector **110** injecting oil into the channel. This permits analysis of each individual liquid droplet without interference from other droplets and provides data acquisition software time to collect and process collected data. Activated reporters generated during the logical computation are then illuminated with the laser **111**, and fluorescence is detected with the fluorescence detector **112**. Droplet sorting can occur with a sorting device depending on the emitted fluorescence. The devices of the invention may include some or all of the exemplary elements described herein and may include others.

**[0096]** In some versions, the device **100** can be configured to split the droplets at any point after formation to increase throughput.

**[0097]** An exemplary device **113** capable of sorting droplets is shown in FIG. **13**. This device comprises a continuous network of microfluidic channels **129** suitable for processing droplets, as well as a set of liquid electrodes **123, 124** capable of conducting electricity. Droplets first flow into injection port **120** and are spaced out by reinjecting oil via an additional port **121**. Droplets pass through sorting junction **122** after having their fluorescence measured via laser(s) **130** and detector(s) **131**. Based on their fluorescence, droplets are directed into sorted outlet **126** or waste outlet **127** through application of an electric field via liquid electrodes **123** and **124**. Intermittent application of this field creates a dielectric force on the droplet, deflecting it into the sorted outlet **126**. Sorting is tuned by the amplitude and frequency of DC current application between reference electrode **123** and sorting electrode **124**. Bias oil, applied through inlet **125**, also tunes sorting. Pressure relief shunts **128** equilibrate the oil pressure between the sorting outlet **126** and waste outlet **127**, thereby preventing pressure fluctuations which can disrupt sorting.

**[0098]** Systems of the invention include any combination of elements described herein for performing the method steps recited herein.

**[0099]** The elements and method steps described herein can be used in any combination whether explicitly described or not.

**[0100]** All combinations of method steps as used herein can be performed in any order, unless otherwise specified or clearly implied to the contrary by the context in which the referenced combination is made.

**[0101]** As used herein, the singular forms “a,” “an,” and “the” include plural referents unless the content clearly dictates otherwise.

**[0102]** Numerical ranges as used herein are intended to include every number and subset of numbers contained within that range, whether specifically disclosed or not. Further, these numerical ranges should be construed as providing support for a claim directed to any number or subset of numbers in that range. For example, a disclosure of from 1 to 10 should be construed as supporting a range of from 2 to 8, from 3 to 7, from 5 to 6, from 1 to 9, from 3.6 to 4.6, from 3.5 to 9.9, and so forth.

**[0103]** All patents, patent publications, and peer-reviewed publications (i.e., “references”) cited herein are expressly incorporated by reference to the same extent as if each individual reference were specifically and individually indicated as being incorporated by reference. In case of conflict between the present disclosure and the incorporated references, the present disclosure controls.

**[0104]** It is understood that the invention is not confined to the particular construction and arrangement of parts herein illustrated and described, but embraces such modified forms thereof as come within the scope of the claims.

## EXAMPLES

### Background

**[0105]** The following examples show aspects of the invention for profiling the nucleic acid composition of each individual cell within a large population of hematopoietic cells for detecting circulating tumor cells (CTCs) therein.

**[0106]** During cancer progression, cells detach from the primary tumor and disseminate throughout the blood stream. These CTCs serve as valuable biomarkers for real-time monitoring of carcinogenesis, and the methods described herein for detecting them provide a critical tool in cancer detection and treatment.

**[0107]** Detecting CTCs remains technically challenging due to their ultra-low abundance among normal hematopoietic cells and their highly heterogeneous phenotypes. The present invention provides a high-throughput platform for single-cell analysis that affords the ability to detect CTCs with high sensitivity and specificity.

**[0108]** The CTC analysis platform combines the specificity of molecular computation with the massive throughput of droplet-based microfluidics. Single cells are encapsulated in microdroplets containing a DNA-based logic circuit that inputs cellular transcripts, performs a logical computation, and outputs a fluorescence signal based on the cell's phenotypic state (FIG. **1**). The microdroplets are generated, incubated, and analyzed on a microfluidic device that can process millions of cells per hour. This approach is highly scalable and can be applied to tens of RNA inputs, providing a detailed profile of a cell's phenotypic state.

### Materials and Methods

#### Device Fabrication

**[0109]** Microfluidic devices were fabricated from polydimethylsiloxane (PDMS) via a soft photolithography process. SU-8 3025 or 3010 Photoresist (Microchem) was deposited onto a silicon wafer and spun to achieve the desired layer height. A photomask was used to create patterns of polymerized photoresist during UV exposure. The patterned wafer was then placed in a petri dish to form a mold, and Sylgard® 184 PDMS (Dow Corning, Cat. No. 4019862) in an 11:1 polymer:activator ratio was added. After polymerization, patterned PDMS was excised and bonded to a glass microscope slide via plasma treatment. Finally, Aquapel (Pittsburgh Glass Works) was applied to the channels to provide a hydrophobic coating.

#### DNA Complexes and Primer Mixes

**[0110]** All DNA oligos were ordered from Integrated DNA Technologies (Coralville, Iowa) using standard desalting,

with the exception of reporter complex strands, which were HPLC purified. All LAMP primers were diluted in DNase/RNase-free water (Invitrogen Cat. No. 10977023) prior to storage at  $-20^{\circ}\text{C}$ . Logic gate and reporter strands were diluted in DEPC-treated 10 mM Phosphate-Buffered Saline (pH 7.4) prior to storage at  $-20^{\circ}\text{C}$ . 100 $\times$  stocks of each DNA complex were prepared in diethyl pyrocarbonate (DEPC)-treated phosphate buffered phosphate buffered

saline (PBS) and stored at  $-20^{\circ}\text{C}$ . On the day of experiment, each DNA complex was separately annealed via heating to  $97^{\circ}\text{C}$ . for 5 minutes and cooling at a rate of  $-2^{\circ}\text{C}/\text{min}$  to  $23^{\circ}\text{C}$ . DNA complexes were stored on ice until the time of experiment. 20 $\times$ LAMP primer mixes were prepared in DNase/RNase-free water and stored at  $-20^{\circ}\text{C}$ . Sequences of primers and logic gates used in LAMP experiments are shown in Table 1.

TABLE 1

Sequences of primers and logic gates used in LAMP experiments.		
Strand	Sequence	SEQ ID NO
<u>KRT19 LAMP Primers</u>		
KRT19 LAMP-3 F3	AGTGACATGCGAAGCCAAT	3
KRT19 LAMP-3 B3	GCTTTCATGCTCAGCTGTGA	4
KRT19 LAMP-3 FIP	AGCGACCTCCCGTTCAATTCTC GAGCAGAACCGGAAGGAT	5
KRT19 LAMP-3 BIP	CACACGGAGCAGCTCCAGATGTG CAGCTCAATCTCAAGACC	6
KRT19 LAMP-3 LF	TGGTGAACCAGGCTTCAGC	7
KRT19 LAMP-3 LB	AGGTCCGAGGTTACTGACCTGC	8
<u>VIM LAMP Primers</u>		
VIM LAMP-2 F3	CCGCACCAACGAGAAGG	9
VIM LAMP-2 B3	TGGTTAGCTGGTCCACCT	10
VIM LAMP-2 FIP	TCCAGGAAGCGCACCTTGTCGGA GCTGCAGGAGCTGAA	11
VIM LAMP-2 BIP	AAGATCCTGCTGGCCGAGCTCCC GCATCTCCTCCTCGTAG	12
VIM LAMP-2 LF	AGTTGGCGAAGCGGTCA	13
VIM LAMP-2 LB	CAGCTCAAGGGCCAAGGCAA	14
<u>ESR1 LAMP Primers</u>		
ESR1 LAMP-1 F3	AGAGCTGCCAACCTTTGG	15
ESR1 LAMP-1 B3	TGAACCAGCTCCCTGTCTG	16
ESR1 LAMP-1 FIP	GGCACTGACCATCTGGTCGGAAG CCCGCTCATGATCAAAC	17
ESR1 LAMP-1 BIP	TTGTTGGATGCTGAGCCCCCCCC ATCATCGAAGCTTCACT	18
ESR1 LAMP-1 LF	GCCAGGCTGTTCTTCTTAGAGC	19
ESR1 LAMP-1 LB	ACTCTATTCCGAGTATGATCCTA CC	20
<u>GAPDH LAMP Primers</u>		
GAPDH LAMP-2 F3	GCTGCCAAGGCTGTGG	21
GAPDH LAMP-2 B3	CCCAGGATGCCCTTGAGG	22
GAPDH LAMP-2 FIP	GTTGGCAGTGGGACACGGAAC AAGGTCATCCCTGAGCTGA	23
GAPDH LAMP-2 BIP	TGTCAGTGGTGGACCTGACCTGT CCGACGCCTGCTTCA	24

TABLE 1-continued

Sequences of primers and logic gates used in LAMP experiments.		
Strand	Sequence	SEQ ID NO
GAPDH LAMP-2 LF	GGCCATGCCAGTGAGCTT	25
GAPDH LAMP-2 LB	CGTCTAGAAAAACCTGCCAAATATG	26
ACTB SNP Detection LAMP Primers		
ACTB 4 B3-SNP	GGCTGGAAGAGTGCCGC	27
ACTB 4 F3	GCGGCTACAGCTTCACCA	28
ACTB 4 FIP	CGTGGCCATCTCTTGCTCGAAGG GGAAATCGTGCCTGACATT	29
ACTB 4 BIP	GCTTCCAGCTCCTCCCTGGACCG CTCATTGCCAATGGT	30
ACTB 4 LF	ACGTAGCACAGCTTCTCCTT	31
ACTB 4 LB	GAAGAGCTACGAGCTGCCT	32
ACTB 4 B3-Sink	GCGGCACTCTTCCAGCC	33
Reporter Complexes		
RepF	6-FAM- CGAGTGCTGCGTATGACAAGGGC TAGCGTT	34
RepF-HEX	HEX- CGAGTGCTGCGTATGACAAGGGC TAGCGTT	35
RepQ	CCCTTGTCATACGCAGCACTCG- IowaBlackFQ	36
RepF2-AF647	AlexaFluor647- CGCCGCGTCCTGATCTAACTGAC TGACTGC	37
RepQ2	TCAGTTAGATCAGGACGCGGCG- IowaBlackRQ	38
Transducer Orthogonality Experiments		
KRT19 -> Rep Transducer Gate	CGAGTGCTGCGTATGACAAGGGC TAGCGTTATGCTACGAGCGACCT CCCGGTTCAATTCT	39
KRT19 -> Rep Transducer Output	AACGCTAGCCCTTGTCATACGCA GCACTCG	40
VIM -> Rep Transducer Gate	CGAGTGCTGCGTATGACAAGGGC TAGCGTTATGCTACGTCCAGGAA GCGCACCTTGTC	41
VIM -> Rep Transducer Output	AACGCTAGCCCTTGTCATACGCA GCACTCG	42
Exemplary Logic Gates Corresponding to Gates Shown in FIGS. 5 and 6		
KRT19 AND VIM Strand 1	CGAGTGCTGCGTATGACAAGGGC TAGCGTTATGCTACGTCCAGGAA GCGCACCTTGTCATGCTACGAGC GACCTCCCGGTTCAATTCT	43

TABLE 1-continued

Sequences of primers and logic gates used in LAMP experiments.		
Strand	Sequence	SEQ ID NO
KRT19 AND VIM Strand 2	CGAGTGCTGCGTATGACAAGGGC TAGCGTTATGCTACGAGCGACCT CCCGGTTCAATTCTATGCTACGT CCAGGAAGCGCACCTTGTC	44
KRT19 OR VIM Gate	CGAGTGCTGCGTATGACAAGGGC TAGCGTTATGCTACGTCCAGGAA GCGCACCTTGTCATGCTACGAGC GACCTCCCGGTTCAATTCT	45
KRT19 OR VIM Output	AACGCTAGCCCTTGTCATACGCA GCACTCG	46
VIM F1	GACAAGGTGCGCTTCCTGGA	47
KRT19 F1	AGAATTGAACCGGGAGGTCGCT	48
AND Gate with LAMP Inputs		
KRT19 Transducer 2 Gate	CTGCTCTCACGGAGGCGCACCGG TAAGGGTCATCGATGAGCGACCT CCCGGTTCAATTCT	49
VIM Transducer 2 Gate	CTGCTCTCACGGAGGCGCACCGG TAAGGGTCATCGATGTCCAGGAA GCGCACCTTGTC	50
KRT19/VIM Transducer 2 Output	CGATGACCCTTACCGGTGCGCCT CCGTGAGAGCAG	51
KRT19 AND VIM Gate	CGAGTGCTGCGTATGACAAGGGC TAGCGTTATGCTGCTCTCACGG	52
KRT19 AND VIM Out	AACGCTAGCCCTTGTCATACGCA GCACTCG	53
KRT19 AND VIM Threshold	CCGCTGGTGATCACTCTGCTCTC ACGGAGGCGCACCGGTAAGGGT CATCG	54
OR Gate with LAMP Inputs		
KRT19 Transducer 3 Gate	CGCGATCCGAGTGCTGCGTATGA CAAGGGCTAGCGTTTGCCGGAAG CGACCTCCCGGTTC	55
VIM Transducer 3 Gate	CGCGATCCGAGTGCTGCGTATGA CAAGGGCTAGCGTTTGCCGATC CAGGAAGCGCACCT	56
KRT19/VIM Transducer 3 Output	TCCGGCAAACGCTAGCCCTTGTC ATACGCAGCACTCGGATCGCG	57
NOT/AND-NOT Gates with LAMP Inputs		
VIM Transducer 4 Gate	CCATCGCGGAGACACGGACATCG TTAAGGCAGCCTGTAGGCAGCCT CCAGGAAGCGCACCT	58
KRT19 Transducer 4 Gate	GTGTCTCCGCGATGGCGAGTGCT GCGTATGACAAGGGCTAGCGTTA GCGACCTCCCGGTT	59
KRT19 AND-NOT VIM Inhibitor	GGCTGCCTACAGGCTGCCTTAAC GATGTCCGTGTCTCCGCGATGG	60
KRT19 AND-NOT VIM Output	AACGCTAGCCCTTGTCATACGCA GCACTCGCCATCGCGAGACAC	61

TABLE 1-continued

Sequences of primers and logic gates used in LAMP experiments.		
Strand	Sequence	SEQ ID NO
<b>Transducer Orthogonality Experiments in Droplets</b>		
KRT19 -> Rep2 Transducer Gate	GTGTCTCCGCGATGGCGCCGCGT CCTGATCTAACTGACTGACTGCA GCGACCTCCCGGTT	62
KRT19 -> Rep2 Transducer Output	GCAGTCAGTCAGTTAGATCAGGA CGCGGCGCCATCGCGGAGACAC	63
VIM Transducer 3 Gate	CGCGATCCGAGTGCTGCGTATGA CAAGGGCTAGCGTTTGCCGGATC CAGGAAGCGCACCT	56
KRT19/VIM Transducer 3 Output	TCCGGCAAACGCTAGCCCTTGTC ATACGCAGCACTCGGATCGCG	57

TABLE 2

Sequences of oligos used in CHA experiments.		
Strand	Sequence	SEQ ID NO
CK19 Sensor	GAGTTACCAGCCTGGAGTTCTCAATGGTGGCCT GGTAACTCACTGACCGAGCTAA	64
H1	CGACATCTAACTAGCTCACTGACCGAGCTAAG CTGTTCTCGATTAGCTCGGTCACTGAGTTACCA G	65
H2	GCTGTTCTCGATCACTGACCGAGCTAATCGAGA ACAGCTTAGCTCG	66
H3	GTCAGTGAGCTAGGTTAGATGTCGCCATGTGTA GACGACATCTAACCTAGCCCTTGTCATAGAGCA C	67
H4	AGATGTCGTCTACACATGGCGACATCTAACCTA GCCCATGTGTAGA	68
RepF-CHA	6-FAM-CGAGTGTCTATGACAAGGGCTAGGTT	69
RepQ-CHA	CCCTTGTCATAGAGCACTCG-IowaBlackFQ	70
CK19 Input	GCCACCATTGAGAACTCCAGG	71

### In Vitro Transcription

**[0111]** DNA templates for KRT19 and VIM transcripts were synthesized as “gBlocks” (SEQ ID NO:72 and SEQ ID NO:73, respectively) by Integrated DNA Technologies (Coralville, Iowa) and cloned into a pET-22b(+) vector (available from Novagen, Cat. No. 69744-3) under a T7 promoter. In vitro transcription was performed with a HiScribe™ T7 High Yield RNA Synthesis Kit (New England Biolabs, Cat. No. E2040S), and resulting RNA was purified using a GeneJET RNA Purification Kit (Thermo Scientific, Cat. No. K0731). RNA concentration was quantified on a NanoDrop™ Spectrophotometer (Thermo Scientific) and stocks were stored at -80° C. in DEPC-treated PBS.

### Cell Culture and Staining

**[0112]** MOLT-4 cells (American Type Culture Collection) were subcultured in a 1:8 ratio every two days and grown in

RPMI-1640 Medium (Gibco, Cat. No. 11875093) supplemented with 10% FBS (Gibco, Cat. No. 10082147) and 1× Antibiotic-Antimycotic (Gibco, Cat. No. 15240062). SK-BR-3, U-2 OS, and MCF7 cells (American Type Culture Collection) were subcultured in a 1:4 ratio every two days and grown in DMEM, high glucose (Gibco, Cat. No. 11965-092) supplemented with 10% FBS and 1× Antibiotic-Antimycotic. On the day of experiment, each cell type was collected and washed twice with Dulbecco's Phosphate-Buffered Saline (DPBS) (Gibco, Cat. No. 14190144). Cells were then stained on ice using either 1 μM CellTrace™ Calcein Red-Orange AM (Invitrogen, Cat. No. C34851), 1 μM CellTrace™ Calcein Violet AM for 405 nm Excitation (Invitrogen, Cat. No. C34858), or 0.6 μM Calcein AM (BD Biosciences, Cat. No. 564061) in DPBS for 30 minutes. Cells were subsequently washed twice with DPBS and resuspended in 18.75% v/v Optiprep™ Density Gradient Medium (Sigma Aldrich, Cat. No. D1556) in DPBS for microfluidic assays.

### Batch RT-LAMP Experiments

**[0113]** Batch RT-LAMP assays were performed in triplicate on a BioRad CFX Connect at 65° C. Reactions were prepared at a total volume of 10 with 1.6 μM each FIP/BIP primer, 0.2 μM each F3/B3 Primer, 0.4 μM each LoopF/B Primer, 1× WarmStart LAMP Master Mix (New England Biolabs, Cat. No. E1700S), 0.5 U/μL SUPERase•In™ RNase Inhibitor (Invitrogen, Cat. No. AM2696), and 0.5× Phosphate Buffered Saline. DNA complexes were added at varying concentrations. LAMP primer and logic gate sequences are shown in Table 1. In reactions without any DNA complexes, LAMP Fluorescent Dye (New England Biolabs) was added as a general LAMP indicator. In lysate experiments, 1% Triton X-100 (Sigma Aldrich, Cat. No. T8787) was included in the reaction mixture. Intact, unstained cells were added to each well immediately before the start of each experiment. For all experiments, “standard concentrations” of LAMP primers are defined as 1.6 μM of each FIP/BIP primer, 0.2 μM of each F3/B3 Primer, and 0.4 μM of each LoopF/B Primer for a given LAMP primer set.

### Transducer Orthogonality Experiments

**[0114]** Experiments were performed in triplicate as described above in “Batch RT-LAMP Experiments,” with slight modifications. Each reaction included two LAMP primer sets: one specific to a KRT19 transcript, and another specific to a VIM transcript. Only one transducer was added to each reaction, recognizing either VIM or KRT19 amplification products. In vitro transcribed KRT19 or VIM RNAs were added to each reaction at a concentration of 10 nM. PBS was also added in non-template control reactions for each transducer. Each reaction included 400 nM transducer gate strand pre-annealed to 200 nM transducer output strand, and 200 nM reporter quenching strand pre-annealed to 100 nM reporter fluorophore strand. Logic gate and LAMP primer sequences are shown in Table 1.

#### AND Logic Gate Experiment with LAMP Inputs

**[0115]** Experiments were performed in triplicate, similarly to “Batch RT-LAMP Experiments.” Each reaction included both KRT19 and VIM LAMP primer sets at standard concentrations (as defined in “Batch RT-LAMP Experiments”). In vitro transcribed KRT19 and/or VIM RNAs were added at 10 nM concentrations. Each reaction also contained 50 nM RepF pre-annealed to 100 nM RepQ. Every reaction included both KRT19 and VIM transducers: 60 nM KRT19 Transducer 2 pre-annealed to 120 nM KRT19/VIM Transducer 2 Output, and 60 nM VIM Transducer 2 pre-annealed to 120 nM KRT19 1 VIM Transducer 2 Output. Each reaction contained 55 nM KRT19 AND VIM Output strand pre-annealed to 60 nM KRT19 AND VIM Gate strand. In KRT19 AND VIM logic experiments, the KRT19 AND VIM Threshold strand was included at 65 nM. All LAMP primer and logic strand sequences are given in Table 1.

#### OR Logic Gate Experiment with LAMP Inputs

**[0116]** Each reaction included both KRT19 and VIM LAMP primer sets at standard concentrations (as defined in “Batch RT-LAMP Experiments”). In vitro transcribed KRT19 and/or VIM RNAs were added at 1 nM concentrations, or an equivalent volume of water as a non-template control. Each reaction contained 100 nM RepF pre-annealed to 200 nM RepQ, 220 nM KRT19 Transducer 3 pre-annealed to 200 nM KRT19/VIM Transducer 3 Output, and 220 nM VIM Transducer 3 pre-annealed to 200 nM KRT19/VIM Transducer 3 Output. Experiments were performed in triplicate, as described in “Batch RT-LAMP Experiments.” All LAMP primer and logic strand sequences are given in Table 1.

#### YES Logic Gate Experiment with LAMP Inputs

**[0117]** Each reaction included the KRT19 primer set at standard concentrations (as defined in “Batch RT-LAMP Experiments”). In vitro transcribed KRT19 RNA was added at 1 nM concentrations, or an equivalent volume of water as a non-template control. Each reaction contained 100 nM RepF pre-annealed to 200 nM RepQ, and 220 nM KRT19 Transducer 3 pre-annealed to 200 nM KRT19/VIM Transducer 3 Output. Experiments were performed in triplicate, as described in “Batch RT-LAMP Experiments.” All LAMP primer and logic strand sequences are given in Table 1.

#### NOT Logic Gate Experiment with LAMP Inputs

**[0118]** Each reaction included 200 nM KRT19 AND-NOT VIM Output pre-annealed to 100 nM RepF, 240 nM VIM Transducer 4 Gate pre-annealed to 220 nM KRT19 AND-NOT VIM Inhibitor, and 200 nM unbound RepQ. Each reaction also included the VIM LAMP primer set at standard concentrations (as defined in “Batch RT-LAMP Experiments”).

1 nM VIM in vitro transcribed RNA was added, or water as a negative control. Experiments were performed in triplicate as described in “Batch RT-LAMP Experiments.”

#### AND-NOT Logic Gate Experiment with LAMP Inputs

**[0119]** Each reaction included 220 nM KRT19 Transducer 4 Gate pre-annealed to 200 nM KRT19 AND-NOT VIM Output, 240 nM VIM Transducer 4 Gate pre-annealed to 220 nM KRT19 AND-NOT VIM Inhibitor, and 200 nM RepQ pre-annealed to 100 nM RepF. Each reaction also included the KRT19 and VIM LAMP primer set at standard concentrations (as defined in “Batch RT-LAMP Experiments”). 1 nM KRT19 and/or VIM in vitro transcribed RNA was added, or water as a negative control. Experiments were performed in triplicate as described in “Batch RT-LAMP Experiments.”

**[0120]** Experiments were performed as described above in “Droplet RT-LAMP Experiments with Fluorogenic Logic Gate Reporter,” with some modifications. Prior to the experiment, MOLT-4 and SK-BR-3 cells were stained separately with Calcein Red-Orange AM (Invitrogen), as described above in “Cell Culture and Staining.” A coflow microfluidic dropmaker with 100  $\mu$ m square channels was used to generate droplets approximately 1 nL in volume. The dropmaker combined three inlets containing:

**[0121]** 1.) A 4 $\times$  mixture of cells (900 cells/ $\mu$ L), suspended in an 18.75% v/v mixture of Optiprep™ Density Medium (Sigma Aldrich, Cat. No. D1556) and Phosphate Buffered Saline,

**[0122]** 2.) 2 $\times$  WarmStart LAMP Master Mix (New England Biolabs, Cat. No. E1700S),

**[0123]** 3.) A 4 $\times$  mixture containing LAMP primers, SUPERase•In™ RNase Inhibitor (Invitrogen, Cat. No. AM2696), 4 $\times$  WarmStart LAMP Fluorescent Dye (New England Biolabs), and 4% v/v Triton X-100 (Sigma Aldrich Cat. No. T8787).

**[0124]** These aqueous flows were combined into droplets suspended in fluorinated oil (QX200™ Droplet Generation Oil for EvaGreen (Bio Rad, Cat. No. 1864005)). Flow rates were 50  $\mu$ L/hour for inlets 1 and 3, 100  $\mu$ L/hour for inlet 2, and 800  $\mu$ L/hour for the oil inlet. The cell concentration (3,600 cells/ $\mu$ L) was chosen such that approximately one in every ten droplets contained a single cell. For microscopy experiments, droplets were collected into a microcentrifuge tube and incubated at 65° C. for 20 minutes prior to fluorescence measurements. Droplets were placed into a PDMS imaging chamber and imaged on a Nikon Eclipse Ti Epifluorescence Microscope.

**[0125]** Final RT-LAMP conditions included 1.6  $\mu$ M each FIP/BIP primer, 0.2  $\mu$ M each F3/B3 Primer, 0.4  $\mu$ M each LoopF/B Primer, 1 $\times$  WarmStart LAMP Master Mix (New England Biolabs), 0.5 U/ $\mu$ L SUPERase•In™ RNase Inhibitor (Invitrogen), 1% Triton X-100 (Sigma Aldrich), 4.7% v/v Optiprep™ Density Gradient Medium (Sigma Aldrich), 1 $\times$  LAMP Fluorescent Dye (New England Biolabs), and 0.5 $\times$  Phosphate Buffer.

#### Droplet RT-LAMP Experiments with Multiplexed Transducers

**[0126]** A coflow microfluidic dropmaker was used to encapsulate cells with LAMP components, logic gates, and lysis reagents. Prior to the experiment, U-2 OS and SK-BR-3 cells were stained separately with Calcein AM (BD Biosciences, Cat. No. 564061), as described above in “Cell Culture and Staining.” 60  $\mu$ m was chosen as the microfluidic



channel width and height, generating droplets approximately 250  $\mu\text{L}$  in volume. This dropmaker combined three aqueous inlets containing:

- [0127] 1.) A  $10\times$  mixture of cells (5,000 cells/ $\mu\text{L}$ ), suspended in Phosphate Buffered Saline,
- [0128] 2.)  $2\times$  WarmStart LAMP Master Mix (New England Biolabs, Cat. No. E1700S),
- [0129] 3.) A  $2.5\times$  mixture containing LAMP primers, DNA complexes, SUPERase•In™ RNase Inhibitor (Invitrogen, Cat. No. AM2696), and 6.25% v/v Tween-20 (Sigma Aldrich Cat. No. P9416).

[0130] These aqueous flows were combined into droplets suspended in fluorinated oil (QX200™ Droplet Generation Oil for EvaGreen (Bio Rad, Cat. No. 1864005)). Flow rates were 80  $\mu\text{L}/\text{hour}$  for inlet 1, 400  $\mu\text{L}/\text{hour}$  for inlet 2, 320  $\mu\text{L}/\text{hour}$  for inlet 3, and 1200  $\mu\text{L}/\text{hour}$  for the oil inlet. The cell concentration (5,000 cells/ $\mu\text{L}$ ) was chosen such that approximately one in every ten droplets contained a single cell. Droplets were collected into a microcentrifuge tube on ice and incubated at 65° C. for 60 minutes or 5 minutes (for negative controls) prior to fluorescence measurements. Droplets were then re-injected into a second microfluidic device for fluorescence measurements, with a droplet injection rate of 400  $\mu\text{L}/\text{hour}$  and an oil reinjection rate of 1,200  $\mu\text{L}/\text{hour}$ . Each droplet passed a set of lasers (Changchun New Industries Optoelectronics Tech. Co., Changchun, China) with 488 nm, 530 nm, and 637 nm excitation wavelengths, and fluorescence was measured via one photomultiplier tube (Thorlabs, Newton, N.J.) per channel. Fluorescence data was acquired via an FPGA card (National Instruments) and analyzed with LabView software (National Instruments).

[0131] Each condition included KRT19 and VIM primer sets, as listed in Table 1. Final RT-LAMP conditions included 1.6  $\mu\text{M}$  each FIP/BIP primer, 0.2  $\mu\text{M}$  each F3/B3 Primer, 0.4  $\mu\text{M}$  each LoopF/B Primer, 100 nM RepF-HEX strand pre-annealed to 200 nM RepQ strand, 100 nM RepF2-AF647 strand pre-annealed to 200 nM RepQ2 strand, 110 nM KRT19->Rep Transducer Gate strand pre-annealed to 100 nM KRT19->Rep Transducer Output, 110 nM VIM->Rep Transducer Gate pre-annealed to 100 nM VIM->Rep Transducer Output,  $1\times$  WarmStart LAMP Master Mix (New England Biolabs), 0.5 U/ $\mu\text{L}$  SUPERase•In™ RNase Inhibitor (Invitrogen), and 2.5% v/v Tween-20 (Sigma Aldrich Cat. No. P9416).

#### Droplet ESR1 RT-LAMP

[0132] Experiments were carried out as in “Droplet RT-LAMP Experiments with Multiplexed Transducers,” with some alterations. MCF7 and SK-BR-3 cells were stained separately with Calcein Red-Orange AM (Invitrogen), as described above in “Cell Culture and Staining.” Cells were loaded into the device at a concentration of 9,000 cells/ $\mu\text{L}$  in Phosphate Buffered Saline with 125 pg/ $\mu\text{L}$  RNase A (Thermo Scientific, Cat. No. EN0531). Each condition included the ESR1 LAMP primer set at standard concentrations (as defined in “Batch RT-LAMP Experiments”). ESR1 LAMP primer sequences are listed in Table 1. Warmstart LAMP Dye (New England Biolabs) was added into inlet 3 as a general LAMP indicator. Final RT-LAMP conditions included  $1\times$  WarmStart LAMP Master Mix (New England Biolabs) with  $1\times$  WarmStart LAMP Dye, 0.5 U/ $\mu\text{L}$  SUPERase•In™ RNase Inhibitor (Invitrogen), and 2.5% v/v Tween-20 (Sigma Aldrich Cat. No. P9416). Droplets were

collected on ice, incubated at 65° C. for 50 minutes, and fluorescence was measured using 473 nm and 532 nm lasers (Changchun New Industries Optoelectronics Tech. Co.) for excitation, similarly to the above experiment. Flow rates for droplet generation were 40  $\mu\text{L}/\text{hour}$  for inlet 1, 100  $\mu\text{L}/\text{hour}$  for inlet 2, 80  $\mu\text{L}/\text{hour}$  for inlet 3, and 800  $\mu\text{L}/\text{hour}$  for the oil inlet.

#### Droplet RT-LAMP with Integrated Device

[0133] Experiments were carried out as in “Droplet ESR1 RT-LAMP,” with some alterations. MOLT-4 cells were stained with Calcein Red-Orange AM (Invitrogen), as described above in “Cell Culture and Staining.” Cells were loaded into the device at a concentration of 9,000 cells/ $\mu\text{L}$  in Phosphate Buffered Saline. Each condition included the GAPDH LAMP primer set at standard concentrations (as defined in “Batch RT-LAMP Experiments”). Primer sequences are listed in Table 1. Final RT-LAMP conditions included  $1\times$  WarmStart LAMP Master Mix (New England Biolabs) with  $1\times$  WarmStart LAMP Dye, 0.5 U/ $\mu\text{L}$  SUPERase•In™ RNase Inhibitor (Invitrogen), and 2.5% v/v Tween-20 (Sigma Aldrich Cat. No. P9416). Droplets were generated, incubated, and analyzed in a single integrated device as shown in FIG. 12. Droplets travelled out of the droplet generator into a length of PE tubing (Scientific Commodities, Inc., Lake Havasu City, Ariz.), after having excess oil extracted for tight droplet packing. The PE tubing length was such that droplets spent 45 minutes within a 65° C. incubator before being reinjected into a microfluidic device for fluorescence measurement. Droplets were excited with 473 nm and 532 nm lasers, and data was acquired and analyzed similarly to the above experiment. Flow rates for droplet generation were 20  $\mu\text{L}/\text{hour}$  for inlet 1, 50  $\mu\text{L}/\text{hour}$  for inlet 2, 40  $\mu\text{L}/\text{hour}$  for inlet 3, and 400  $\mu\text{L}/\text{hour}$  for the oil inlet. Oil was subsequently extracted at 390  $\mu\text{L}/\text{hour}$  and reinjected at 200  $\mu\text{L}/\text{hour}$  prior to droplet measurement.

#### Catalyzed Hairpin Assembly Experiments

[0134] Catalyzed Hairpin Assembly (CHA) was performed in 10  $\mu\text{L}$  reactions at 37° C. on a Tecan Spark plate reader. Fluorescence was measured with an excitation wavelength of 490 nm and an emission wavelength of 535. The reaction buffer consisted of TENaK (20 mM Tris, 1 mM EDTA, 140 mM NaCl, and 5 mM KCl, pH 8.0) plus 0.5% SDS. Each reaction contained DNA oligos including 50 nM H1, 400 nM H2, 50 nM H3, 400 nM H4, 10 nM CK19 Sensor, and 50 nM RepF-CHA pre-annealed to 100 nM RepQ-CHA. Oligos were separately annealed as described in “DNA Complexes and Primer Mixes,” except for RepF-CHA and RepQ-CHA, which were annealed together. Sequences of each oligo are given in Table 2. For CHA background experiments, reactions were performed in triplicate with or without 100 pM of the DNA oligo “CK19 Input” present to initiate the reaction. Reactions proceeded for 12 hours.

[0135] For lysate inhibition experiments, MOLT-4 cells were titrated into the LAMP reactions with final concentrations ranging from  $3.9\times 10^5$  cells/ $\mu\text{L}$  to  $1.0\times 10^8$  cells/ $\mu\text{L}$ . In “CK19+” reactions, 10 nM of the DNA oligo “CK19 Input” was added to initiate the reaction, otherwise no initiator was added. Reactions proceeded for 8 hours.

#### Droplet Sorting Experiments

[0136] Droplets were generated similarly to the methods used in “Droplet ESR1 RT-LAMP” above, with some altera-

tions. MCF7 cells were stained with Calcein Red-Orange AM (Invitrogen) and SK-BR-3 cells were stained separately with Calcein Violet AM (Invitrogen), as described above in “Cell Culture and Staining.” Cells were mixed in a 1:1 ratio and loaded into the device at a concentration of 9,000 cells/ $\mu$ L total in Phosphate Buffered Saline. Each condition included the ESR1 LAMP primer set at standard concentrations (as defined in “Batch RT-LAMP Experiments”). Primer sequences are listed in Table 1. Warmstart LAMP Dye (New England Biolabs) was added into inlet 3 as a general LAMP indicator. Final RT-LAMP conditions included 1 $\times$  WarmStart LAMP Master Mix (RNA & DNA) (New England Biolabs) with 1 $\times$  WarmStart LAMP Dye, 0.5 U/ $\mu$ L SUPERase<sup>•</sup>In<sup>™</sup> RNase Inhibitor (Invitrogen), and 2.5% v/v Tween-20 (Sigma Aldrich Cat. No. P9416). Flow rates for droplet generation were 40  $\mu$ L/hour for inlet 1, 100  $\mu$ L/hour for inlet 2, 80  $\mu$ L/hour for inlet 3, and 800  $\mu$ L/hour for the oil inlet. Droplets were collected on ice, incubated at 65° C. for 1 hour, and loaded into a sorting device as shown in FIG. 13. See also (Sciambi and Abate 2015). Sorting flow rates were 100  $\mu$ L/hour for droplets, 400  $\mu$ L/hour for reinjection oil, and 1,000  $\mu$ L/hour for bias oil. Fluorescence was measured using 405 nm, 473 nm, and 532 nm lasers (Changchun New Industries Optoelectronics Tech. Co.) for excitation, similarly to the above experiment. Droplets were sorted based on high fluorescence in the LAMP dye channel (473 nm excitation). Each sorting pulse was applied through the sorting (positive) and reference (negative) electrodes using a 10 kHz square wave, with 800V amplitude and 250 burst cycles, generated by a Trek model 2210 high voltage amplifier (Trek Inc., Lockport, N.Y.). Sorting and reference electrodes were filled with 1M NaCl dissolved in de-ionized water. After sorting, droplets were placed into a PDMS imaging chamber and imaged on a Nikon Eclipse Ti Epifluorescence Microscope.

#### ACTB SNP-LAMP Detection Experiments

**[0137]** Experiments were performed in duplicate similarly to the methods used in “Batch RT-LAMP Experiments” above, with some modifications. Total RNA was extracted from MOLT-4 or SK-BR-3 cells using a GeneJET RNA Purification Kit (Thermo Scientific, Cat. No. K0731) and was added at a final concentration of 1 ng/ $\mu$ L. ACTB LAMP primers were added at standard concentrations (as defined in “Batch RT-LAMP Experiments”). Additionally, 1  $\mu$ M “ACTB 4 B3-Sink” strand was added. All oligo sequences can be found in Table 1. Warmstart LAMP Dye (New England Biolabs) was added as a general LAMP indicator.

#### Results

##### DNA-Based CTC Detection Circuit

**[0138]** The following examples show a DNA-based circuit that inputs multiple cellular transcripts, performs a logical computation, and outputs a binary CTC classification. Early experiments indicated that DNA strand displacement cascades were insufficient to detect transcript levels from single cells and therefore required an input amplification step. We therefore sought to develop amplification mechanisms that are sensitive, selective, and resistant to high lysate concentrations.

**[0139]** Signal amplification: We initially explored a catalytic hairpin assembly (CHA) amplification mechanism.

CHA uses an input nucleic acid as a catalyst to assemble metastable hairpins, resulting in linear signal amplification. CHA amplification suffered from high signal background and strong cell lysate inhibition (FIGS. 14A and 14B). After thorough characterization, we concluded that CHA was insufficient to amplify transcripts from single cells in microfluidic droplets. We also tested hybridization chain reaction (HCR) as an amplification mechanism and found results similar to CHA. In FIG. 14A, error bars denote  $\pm 1$  standard deviation of the mean. These experiments were performed as described in “Catalyzed Hairpin Assembly Experiments.”

**[0140]** We identified reverse transcriptase loop-mediated isothermal amplification (RT-LAMP) as a robust technique for amplifying transcripts from single cells. LAMP uses six primers and a strand-displacing DNA polymerase to exponentially amplify nucleic acid targets. With RT-LAMP, we’ve achieved sub-nanomolar detection sensitivity and lysate resistance beyond the target working concentration of 10<sup>6</sup> cells/ml. We tested RT-LAMP’s ability to distinguish between human breast cancer cells (SK-BR-3) and leukocytes (MOLT-4) using primers specific to the epithelial marker Cytokeratin 19 (CK19, KRT19). These experiments revealed a broad (50 minute) detection window with a signal-to-background ratio >150 (FIGS. 15A and 15B). This outstanding signal amplification is more than sufficient to feed into downstream molecular logic gates and detect on microfluidic chips. Furthermore, we determined that CK19 LAMP reliably distinguishes SK-BR-3 and MOLT-4 lysates even at 10<sup>7</sup> cells/mL, which is equivalent to one cell per 100 pL droplet (FIG. 15B). These experiments show that RT-LAMP on the epithelial marker KRT19 can distinguish between human breast cancer cells (SK-BR-3) and leukocytes (MOLT-4) under conditions equivalent to microdroplet reactions. Error bars denote  $\pm 1$  standard deviation of the mean in all experiments. These experiments were performed as described in “Batch RT-LAMP Experiments.”

**[0141]** Molecular logic: A CTC detection circuit must integrate the signals from multiple transcripts to perform a CTC classification. DNA logic gates can perform complex molecular logic and computation on nucleic acid inputs. We have designed new logic gates that harness the strand-displacement activity of the LAMP polymerase to drive strand displacement. This new mechanism provides superior kinetics and less signal leakage than traditional random-walk branch migration cascades.

**[0142]** We have designed all fundamental one- and two-input logic gates using the polymerase-driven mechanism (FIGS. 4-11). In theory, any arbitrarily complex logical function could be computed by cascading these fundamental gates. As an initial demonstration, we built a YES gate that detects an epithelial marker (KRT19) (FIG. 4), a NOT gate that detects a mesenchymal marker (VIM) (FIG. 10), an OR gate that recognizes epithelial (KRT19) or mesenchymal (VIM) markers (FIGS. 7A-D), an AND gate that recognizes epithelial (KRT19) and mesenchymal (VIM) markers (FIGS. 7A-7D), and an AND-NOT gate that recognizes epithelial (KRT19) and mesenchymal (VIM) markers (FIGS. 9A-D). These gates are important for identifying CTCs that occupy states along the epithelial-mesenchymal or mesenchymal-epithelial transitions. The experiments on these gates demonstrated a strong and uniform fluorescence signal in the presence of KRT19 and/or VIM consistent with the designed logical operations of the logic gates (FIG. 16).

FIG. 16 includes endpoint results from the time traces shown for the NOT gate (FIG. 19A), OR gate (FIG. 18A), AND gate (FIG. 18B), and AND-NOT gate (FIG. 19B). These experiments were performed as described under “AND Logic Gate Experiment with LAMP Inputs,” “OR Logic Gate Experiment with LAMP Inputs,” “YES Logic Gate Experiment with LAMP Inputs,” “NOT Logic Gate Experiment with LAMP Inputs,” and “AND-NOT Logic Gate Experiment with LAMP Inputs.” Error bars denote  $\pm 1$  standard deviation of the mean in all plots.

[0143] We additionally demonstrated that YES gates can operate orthogonally to detect specific amplification events in a multiplexed LAMP reaction. Experiments were conducted using orthogonal, multiplexed LAMP and YES logic gates recognizing either VIM (FIG. 17B) or KRT19 (FIG. 17A), as described above under “Transducer Orthogonality Experiments.” Error bars denote  $\pm 1$  standard deviation of the mean.

#### Ultra-High-Throughput Microfluidic CTC Screening Device

[0144] The following examples provide an integrated microfluidic device that monitors the output of the DNA-based logic circuit developed in the experiments outlined above. The experiments demonstrate the ability to miniaturize RT-LAMP reactions in microfluidic droplets and apply this to distinguish phenotypic states of single cells.

[0145] Single-cell analysis in microfluidic droplets: After optimizing LAMP conditions in bulk assays, we scaled them down to a microemulsion format. Single cells were loaded onto a microfluidic device and encapsulated in  $\sim 1$  nL droplets containing lysis reagents, RT-LAMP reagents, and a dsDNA-specific LAMP indicator. A cell stain (Calcein Red-Orange AM, Invitrogen) was used to verify co-localization of cells and LAMP signal. The droplets were incubated for 20 minutes and imaged using fluorescence microscopy. Leukocytes (MOLT-4) displayed no KRT19 signal above background (FIG. 20B), whereas breast cancer cells (SK-BR-3) displayed strong KRT19 amplification (FIG. 20A). This experiment demonstrates the ability to distinguish cell types using LAMP in microemulsion drops. The experiment was performed as described in “Droplet RT-LAMP Experiments with dsDNA-Specific Reporter.”

[0146] We further demonstrated single-cell analysis with higher throughput using a fully microfluidic workflow with serial detection. We successfully applied this technique to analyze Estrogen Receptor (ER, ESR1) expression for thousands of MCF7 (ER+) and SK-BR-3 (ER-) cells, as shown in FIG. 21. As expected, a significantly larger portion of the MCF7 cells showed high fluorescence for the LAMP indicator than did the SK-BR-3 cells. This demonstrates that our method can successfully distinguish cells based on their mRNA expression in a high-throughput manner. This experiment was performed as described in “Droplet ESR1 RT-LAMP.”

[0147] We additionally showed that multiple transcripts can be assayed simultaneously in these droplet assays, as shown in FIGS. 23A and 23B. We performed a multiplexed transducer experiment wherein KRT19 amplification activates an Alexa Fluor 647 reporter, and VIM amplification activates a HEX reporter. We encapsulated SK-BR-3 (CK19+/VIM-) and U-2 OS (CK19-/VIM+) cells into droplets with these transducers and reporters and saw that each cell type only activated its expected reporter. This

experiment was performed as described in “Droplet RT-LAMP Experiments with Multiplexed Transducers.”

[0148] Integrated microfluidic device: We integrated all three microfluidic steps into a continuous workflow that requires no user intervention. This device comprises three modules. The modules: (1) Encapsulate single cells in droplets containing the DNA circuit and amplification reagents; (2) Incubate the reaction for a specified time and temperature; and (3) Detect the circuit output using fluorescence spectroscopy. An exemplary system is shown in FIG. 12. As shown in FIG. 22, we were able to amplify a GAPDH transcript in thousands of MOLT-4 cells using this device. Based on these experiments, a fully automated microfluidic device for analyzing millions of cells per hour can be made. This experiment was performed as described in “Droplet RT-LAMP with Integrated Device.”

[0149] Microfluidic droplet sorting: We employed a dielectrophoretic sorting device to separate two cell types based on expression of an Estrogen Receptor (ER) transcript (ESR1). MCF7 (ER+) and SK-BR-3 (ER-) cells were separately stained, mixed together, then sorted based on RT-LAMP amplification. As shown in FIGS. 24A and 24B, this device successfully enriched green fluorescent droplets in the sorted outlet, which indicates successful ESR1 amplification. This experiment demonstrates our ability to physically separate cell populations based on their transcriptional status. These sorted and unsorted pools could be further analyzed by RNA sequencing, or other assays. This sorting device is depicted in FIG. 13. See also Sciambi and Abate 2015.

[0150] Additional logic circuits: The experiments outlined above demonstrate the ability to profile single cells in microfluidic droplets using strand displacement cascades. One of the advantages of the molecular logic circuits is the ability to swap in/out new elements to tailor assays to cancer types or even patients. Logic circuits can be built to profile multiple transcriptional inputs, such as informative molecular marker panels for specific cancer types. The microfluidic device can be used to detect and/or classify low-abundance CTCs in human blood samples.

[0151] Additional samples and profiling characteristics: The assays and devices described herein can be used on samples other than blood samples. Cells from tissue biopsies, for example, can be dispersed and subjected to nucleic acid profiling as described herein. The profiling can be used to profile any of a number of nucleic acid characteristics and to classify cells in any of a number of formats. Profiling expression patterns of mRNAs and/or miRNAs and detecting or profiling SNPs provide only a few, non-limiting examples. We have demonstrated that LAMP-based SNP detection could be feasible in droplets, by discriminating between MOLT-4 and SK-BR-3 total RNA. MOLT-4 RNA, which contains a SNP in an ACTB transcript, amplified before SK-BR-3 RNA. These results are shown in FIG. 25. Error bars denote  $\pm 1$  standard deviation of the mean. This SNP experiment was performed as described in “ACTB SNP-LAMP Detection Experiments.”

#### REFERENCES

[0152] Arezi B, McCarthy M, Hogrefe H. Mutant of Moloney murine leukemia virus reverse transcriptase exhibits higher resistance to common RT-qPCR inhibitors. *Anal Biochem.* 2010 May 15; 400(2):301-3.

- [0153] Baccouche A, Montagne K, Padirac A, Fujii T, Rondelez Y. Dynamic DNA-toolbox reaction circuits: a walkthrough. *Methods*. 2014 May 15; 67(2):234-49.
- [0154] Badolo A, Okado K, Guelbeogo W M, Aonuma H, Bando H, Fukumoto S, Sagnon N, Kanuka H. Development of an allele-specific, loop-mediated, isothermal amplification method (AS-LAMP) to detect the L1014F kdr-w mutation in *Anopheles gambiae* s. 1. *Malar J*. 2012 Jul. 6; 11:227.
- [0155] Bendall S C, Nolan G P. From single cells to deep phenotypes in cancer. *Nat Biotechnol*. 2012 Jul. 10; 30(7):639-47.
- [0156] Chen Y, Song Y, Wu F, Liu W, Fu B, Feng B, Zhou X. A DNA logic gate based on strand displacement reaction and rolling circle amplification, responding to multiple low-abundance DNA fragment input signals, and its application in detecting miRNAs. *Chem Commun (Camb)*. 2015 Apr. 25; 51(32):6980-3.
- [0157] Deng W, Xu H, Ding W, Liang H (2014) DNA Logic Gate Based on Metallo-Toehold Strand Displacement. *PLoS ONE* 9(11): e111650.
- [0158] Eastburn D J, Sciambi A, Abate A R. Ultrahigh-throughput Mammalian single-cell reverse-transcriptase polymerase chain reaction in microfluidic drops. *Anal Chem*. 2013 Aug. 20; 85(16):8016-21.
- [0159] Guo M T, Rotem A, Heyman J A, Weitz D A. Droplet microfluidics for high-throughput biological assays. *Lab Chip*. 2012 Jun. 21; 12(12):2146-55.
- [0160] Hedman J, Rådström P. Overcoming inhibition in real-time diagnostic PCR. *Methods Mol Biol*. 2013; 943: 17-48.
- [0161] Kalisky T, Blainey P, Quake S R. Genomic analysis at the single-cell level. *Annu Rev Genet*. 2011; 45:431-45.
- [0162] Kalisky T, Quake S R. Single-cell genomics. *Nat Methods*. 2011 April; 8(4):311-4.
- [0163] Levsky J M, Singer R H. Gene expression and the myth of the average cell. *Trends Cell Biol*. 2003 January; 13(1):4-6.
- [0164] Li X, Ding T, Sun L, Mao C. Ultrasensitive DNA detection by cycle isothermal amplification based on nicking endonuclease and its application to logic gates. *Biosens Bioelectron*. 2011 Dec. 15; 30(1):241-8.
- [0165] Li W, Yang Y, Yan H, Liu Y. Three-input majority logic gate and multiple input logic circuit based on DNA strand displacement. *Nano Lett*. 2013 Jun. 12; 13(6): 2980-8.
- [0166] Li W, Zhang F, Yan H, Liu Y. DNA based arithmetic function: a half adder based on DNA strand displacement. *Nanoscale*. 2016 Feb. 14; 8(6):3775-84.
- [0167] Mary P, Dauphinot L, Bois N, Potier M C, Studer V, Tabeling P. Analysis of gene expression at the single-cell level using microdroplet-based microfluidic technology. *Biomicrofluidics*. 2011 June; 5(2):24109.
- [0168] Massey M, Medintz I L, Ancona M G, Algar W R. Time-Gated FRET and DNA-Based Photonic Molecular Logic Gates: AND, OR, NAND, and NOR. *ACS Sens*. 2017 Aug. 25; 2(8):1205-1214.
- [0169] Novak R, Zeng Y, Shuga J, Venugopalan G, Fletcher D A, Smith M T, Mathies R A. Single-cell multiplex gene detection and sequencing with microfluidically generated agarose emulsions. *Angew Chem Int Ed Engl*. 2011 Jan. 10; 50(2):390-5.
- [0170] Okamoto A, Tanaka K, Saito I. DNA logic gates. *J Am Chem Soc*. 2004 Aug. 4; 126(30):9458-63.
- [0171] Qian L, Winfree E. A simple DNA gate motif for synthesizing large-scale circuits. *J R Soc Interface*. 2011 Sep. 7; 8(62):1281-97.
- [0172] Qian L, Winfree E, Bruck J. Neural network computation with DNA strand displacement cascades. *Nature*. 2011 Jul. 20; 475(7356):368-72.
- [0173] Ravan H, Amandadi M, Esmaeili-Mahani S. DNA Domino-Based Nanoscale Logic Circuit: A Versatile Strategy for Ultrasensitive Multiplexed Analysis of Nucleic Acids. *Anal Chem*. 2017 Jun. 6; 89(11):6021-6028.
- [0174] Sciambi A, Abate A R. Accurate microfluidic sorting of droplets at 30 kHz. *Lab Chip*. 2015 Oct. 22; 15:47-51.
- [0175] Sieuwerts A M, Mostert B, Bolt-de Vries J, Peeters D, de Jongh F E, Stouthard J M, Dirix L Y, van Dam P A, Van Galen A, de Weerd V, Kraan J, van der Spoel P, Ramirez-Moreno R, van Deurzen C H, Smid M, Yu J X, Jiang J, Wang Y, Gratama J W, Sleijfer S, Foekens J A, Martens J W. mRNA and microRNA expression profiles in circulating tumor cells and primary tumors of metastatic breast cancer patients. *Clin Cancer Res*. 2011 Jun. 1; 17(11):3600-18.
- [0176] Tanner N A, Zhang Y, Evans T C Jr. Simultaneous multiple target detection in real-time loop-mediated isothermal amplification. *Biotechniques*. 2012 August; 53(2):81-9.
- [0177] Teh S Y, Lin R, Hung L H, Lee A P. Droplet microfluidics. *Lab Chip*. 2008 February; 8(2):198-220.
- [0178] Thubagere A J, Thachuk C, Berleant J, Johnson R F, Ardelean D A, Cherry K M, Qian L. Compiler-aided systematic construction of large-scale DNA strand displacement circuits using unpurified components. *Nat Commun*. 2017 Feb. 23; 8:14373.
- [0179] Vyawahare S, Griffiths A D, Merten C A. Miniaturization and parallelization of biological and chemical assays in microfluidic devices. *Chem Biol*. 2010 Oct. 29; 17(10):1052-65.
- [0180] Wei H, Hu B, Tang S, Zhao G, Guan Y. Repressor logic modules assembled by rolling circle amplification platform to construct a set of logic gates. *Sci Rep*. 2016 Nov. 21; 6:37477.
- [0181] White A K, Vanlnsberghe M, Petriv O I, Hamidi M, Sikorski D, Marra M A, Piret J, Aparicio S, Hansen C L. High-throughput microfluidic single-cell RT-qPCR. *Proc Natl Acad Sci USA*. 2011 Aug. 23; 108(34):13999-4004.
- [0182] Xu W, Deng R, Wang L, Li J. Multiresponsive rolling circle amplification for DNA logic gates mediated by endonuclease. *Anal Chem*. 2014 Aug. 5; 86(15):7813-8.
- [0183] Yang J, Shen L, Ma J, Schlager H I, Liu S, Xu J, Zhang C. Fluorescent nanoparticle beacon for logic gate operation regulated by strand displacement. *ACS Appl Mater Interfaces*. 2013 Jun. 26; 5(12):5392-6.
- [0184] Yang J, Song Z, Liu S, Zhang Q, Zhang C. Dynamically Arranging Gold Nanoparticles on DNA Origami for Molecular Logic Gates. *ACS Appl Mater Interfaces*. 2016 Aug. 31; 8(34):22451-6.
- [0185] Yang B, Zhang X B, Kang L P, Huang Z M, Shen G L, Yu R Q, Tan W. Intelligent layered nanoflare: "lab-on-a-nanoparticle" for multiple DNA logic gate operations and efficient intracellular delivery. *Nanoscale*. 2014 Aug. 7; 6(15):8990-6.

- [0186] Yao D, Wang B, Xiao S, Song T, Huang F, Liang H. What Controls the “Off/On Switch” in the Toehold-Mediated Strand Displacement Reaction on DNA Conjugated Gold Nanoparticles? *Langmuir*. 2015 Jun. 30; 31(25):7055-61.
- [0187] Yongkiettrakul S, Kampeera J, Chareanchim W, Rattanajak R, Pornthanakasem W, Kiatpathomchai W, Kongkasuriyachai D. Simple detection of single nucleotide polymorphism in *Plasmodium falciparum* by SNP-LAMP assay combined with lateral flow dipstick. *Parasitol Int*. 2017 February; 66(1):964-971.
- [0188] Zanolli L M, Spoto G. Isothermal amplification methods for the detection of nucleic acids in microfluidic devices. *Biosensors (Basel)*. 2012 Dec. 27; 3(1):18-43.
- Zhang C, Yang J, Xu J. Circular DNA logic gates with strand displacement. *Langmuir*. 2010 Feb. 2; 26(3):1416-9.
- [0189] Zhang H, Jenkins G, Zou Y, Zhu Z, Yang C J. Massively parallel single-molecule and single-cell emulsion reverse transcription polymerase chain reaction using agarose droplet microfluidics. *Anal Chem*. 2012 Apr. 17; 84(8):3599-606.
- [0190] Zhu J, Zhang L, Dong S, Wang E. Four-way junction-driven DNA strand displacement and its application in building majority logic circuit. *ACS Nano*. 2013 Nov. 26; 7(11):10211-7.
- [0191] Zou C, Wei X, Zhang Z, Liu C, Zhou C, Liu Y. Four-Analog Computation Based on DNA Strand Displacement. *ACS Omega* 2017 2 (8), 4143-4160.

## SEQUENCE LISTING

<160> NUMBER OF SEQ ID NOS: 73

<210> SEQ ID NO 1

<211> LENGTH: 1921

<212> TYPE: DNA

<213> ORGANISM: Homo sapiens

<400> SEQUENCE: 1

```

gagtgcgcgg cgcgggggcca atcagcgtgc gccgttcga aagttgcctt ttatggctcg      60
agcggccgcg cgcgcgccct ataaaaccca gcggcgcgac gcgccaccac cgccgagacc      120
gcgtccgccc cgcgagcaca gagcctcgcc ttgcccgcgc cgccgcccggt ccacacccgc      180
cgccagctca ccatggatga tgatatcgcc gcgctcgctc tcgacaacgg ctccggcatg      240
tgcaaggccg gcttcgcggg cgacgatgcc ccccgggccg tcttcccctc catcgtgggg      300
cgccccaggc accagggcgt gatggtgggc atgggtcaga aggattccta tgtgggcgac      360
gaggcccaga gcaagagagg catcctcacc ctgaagtacc ccacgagca cggcatcgtc      420
accaaactggg acgacatgga gaaaatctgg caccacacct tctacaatga gctgcgtgtg      480
gtcccgagg agcaccgccg gctgctgacc gagggccccc tgaaccccaa ggccaaccgc      540
gagaagatga ccagatcat gtttgagacc ttcaacaccc cagccatgta cgttgctatc      600
caggctgtgc tatccctgta cgcctctggc cgtaccactg gcatcgtgat ggactccggt      660
gacggggtea cccacactgt gcccatctac gaggggtatg cctccccc tgccatcctg      720
cgtctggacc tggctggcgg ggacctgact gactacctca tgaagatcct caccgagcgc      780
ggctacagct tcaccaccac ggccgagcgg gaaatcgtgc gtgacattaa ggagaagctg      840
tgctacgtcg ccttggaatt cgagcaagag atggccacgg ctgcttcag ctcctccctg      900
gagaagagct acgagctgcc tgacggccag gtcacacca ttggcaatga gcggttccgc      960
tgccctgagg cactcttcca gccttcttc ctgggcatgg agtctgtgg catccacgaa     1020
actaccttea actccatcat gaagtgtgac gtggacatcc gcaaacacct gtacgccaac     1080
acagtgtgtg ctggcgccac caccatgtac cctggcattg ccgacaggat gcagaaggag     1140
atcaactgccc tggcaccacg cacaatgaag atcaagatca ttgctcctcc tgagcgcaag     1200
tactccgtgt ggatcgccgg ctccatcctg gcctcgtgtt ccaccttcca gcagatgtgg     1260
atcagcaagc aggagtatga cagtcgggc cctccatcg tcaccgcaa atgcttctag     1320
gcggactatg acttagttgc gttacacctt ttcttgacaa aacctaaact gcgcagaaaa     1380
caagatgaga ttggcatggc ttatttgggt ttttttgggt tgttttgggt tttttttttt     1440

```

-continued

---

ttttggcttg actcaggatt taaaaactgg aacggtgaag gtgacagcag tcggttggag	1500
cgagcatccc ccaaagtcca caatgtggcc gaggactttg attgcacatt gttgtttttt	1560
taatagtcat tccaaatatg agatgcgttg ttacaggaag tcccttgcca tcctaaaagc	1620
caccccactt ctctctaagg agaatggccc agtcctctcc caagtccaca caggggaggt	1680
gatagcattg ctttcgtgta aattatgtaa tgcaaaattt ttttaattct cgccttaata	1740
cttttttatt ttgttttatt ttgaatgatg agccttcgtg ccccccttc cccctttttt	1800
gtcccccaac ttgagatgta tgaaggcttt tggctctcct gggagtgggt ggaggcagcc	1860
agggttacc tgtacactga cttgagacca gttgaataaa agtgcacacc ttaaaaatga	1920
g	1921

&lt;210&gt; SEQ ID NO 2

&lt;211&gt; LENGTH: 1921

&lt;212&gt; TYPE: DNA

&lt;213&gt; ORGANISM: Homo sapiens

&lt;400&gt; SEQUENCE: 2

gagtgagcgg cgcggggcca atcagcgtgc gccgttccga aagttgcctt ttatggctcg	60
agcgggcgcg gcggcgcctt ataaaacca gcggcgcgac gcgccaccac cgccgagacc	120
gcgtccgccc cgcgagcaca gagcctcgcc tttgccgac cgccgcccgt ccacaccgcg	180
cgccagctca ccatggatga tgatatgcc gcgctcgtcg tcgacaacgg ctccggcatg	240
tgcaaggccg gcttcgcggg cgacgatgcc ccccgggccg tcttccccct catcgtgggg	300
cgccccaggc accagggcgt gatggtgggc atgggtcaga aggattccta tgtgggcgac	360
gaggccaga gcaagagagg catcctcacc ctgaagtacc ccatcgagca cgccatcgtc	420
accaactggg acgacatgga gaaaatctgg caccacacct tctacaatga gctgcgtgtg	480
gtccccgagg agcaccctgt gctgtgacc gagggccccc tgaaccccaa ggccaaccgc	540
gagaagatga cccagatcat gtttgagacc ttcaacaccc cagccatgta cgttgctatc	600
caggctgtgc tatccctgta cgcctctggc cgtaccactg gcacgtgat ggactccggt	660
gacgggggta cccacactgt gcccatctac gaggggtatg cctcccccca tgccatcctg	720
cgtctggacc tggctggccg ggacctgact gactacctca tgaagatcct caccgagcgc	780
ggctacagct tcaccaccac ggccgagcgg gaaatcgtgc gtgacattaa ggagaagctg	840
tgtacgtcg ccctggactt cgagcaagag atggccacgg ctgcttccag ctctccctg	900
gagaagagct acgagctgcc tgacggccag gtcacacca ttggcaatga gcggttccgc	960
tgccctgcgg cactcttcca gccttcttc ctgggcatgg agtcctgtgg catccacgaa	1020
actaccttca actccatcat gaagtgtgac gtggacatcc gcaaagacct gtacgccaac	1080
acagtgtgtg ctggcggcac caccatgtac cctggcattg ccgacaggat gcagaaggag	1140
atcactgccc tggcaccacg cacaatgaag atcaagatca ttgctcctcc tgagcgcaag	1200
tactccgtgt ggatcggcgg ctccatcctg gcctcgtgt ccaccttcca gcagatgtgg	1260
atcagcaagc aggagtatga cgagtcgggc cctcccatcg tccaccgcaa atgcttctag	1320
gcggactatg acttagttgc gttacacctt ttcttgacaa aacctaaact gcgcagaaaa	1380
caagatgaga ttggcatggc tttatttgtt ttttttgttt tgttttggtt tttttttttt	1440
ttttggcttg actcaggatt taaaaactgg aacggtgaag gtgacagcag tcggttggag	1500

-continued

---

cgagcatccc ccaaagttca caatgtggcc gaggactttg attgcacatt gttgtttttt 1560  
taatagtcac tccaaatatg agatgcgttg ttacaggaag tcccttgcca tcctaaaagc 1620  
caccceactt ctctctaagg agaatggccc agtcctctcc caagtccaca caggggaggt 1680  
gatagcattg ctttcgtgta aattatgtaa tgcaaaattt ttttaatttt cgccttaata 1740  
cttttttatt ttgttttatt ttgaatgatg agccttcgtg ccccccttc cccctttttt 1800  
gtccccaac ttgagatgta tgaaggcttt tggctccct gggagtgggt ggaggcagcc 1860  
agggcttacc tgtacactga cttgagacca gttgaataaa agtgcacacc ttaaaaatga 1920  
g 1921

<210> SEQ ID NO 3  
<211> LENGTH: 19  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer KRT19 LAMP-3 F3

<400> SEQUENCE: 3

agtgacatgc gaagccaat 19

<210> SEQ ID NO 4  
<211> LENGTH: 20  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer KRT19 LAMP-3 B3

<400> SEQUENCE: 4

gctttcatgc tcagctgtga 20

<210> SEQ ID NO 5  
<211> LENGTH: 41  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer KRT19 LAMP-3 FIP

<400> SEQUENCE: 5

agcgacctcc cggttcaatt ctcgagcaga accggaagga t 41

<210> SEQ ID NO 6  
<211> LENGTH: 41  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: KRT19 LAMP-3 BIP

<400> SEQUENCE: 6

cacacggagc agctccagat gtgcagctca atctcaagac c 41

<210> SEQ ID NO 7  
<211> LENGTH: 19  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer KRT19 LAMP-3 LF

<400> SEQUENCE: 7

tggatgaacca ggcttcagc 19

---

-continued

---

<210> SEQ ID NO 8  
<211> LENGTH: 22  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer KRT19 LAMP-3 LB

<400> SEQUENCE: 8

agggtccgagg ttactgacct gc 22

<210> SEQ ID NO 9  
<211> LENGTH: 17  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer VIM LAMP-2 F3

<400> SEQUENCE: 9

ccgcaccaac gagaagg 17

<210> SEQ ID NO 10  
<211> LENGTH: 18  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer VIM LAMP-2 B3

<400> SEQUENCE: 10

tggttagctg gtccacct 18

<210> SEQ ID NO 11  
<211> LENGTH: 38  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer VIM LAMP-2 FIP

<400> SEQUENCE: 11

tccaggaagc gcacctgtgc ggagctgcag gagctgaa 38

<210> SEQ ID NO 12  
<211> LENGTH: 40  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer VIM LAMP-2 BIP

<400> SEQUENCE: 12

aagatcctgc tggccgagct cccgcattctc ctctctgtag 40

<210> SEQ ID NO 13  
<211> LENGTH: 17  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer VIM LAMP-2 LF

<400> SEQUENCE: 13

agttggcgaa gcggtca 17

<210> SEQ ID NO 14  
<211> LENGTH: 20



---

-continued

---

<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer VIM LAMP-2 LB  
  
<400> SEQUENCE: 14  
  
cagctcaagg gccaaaggcaa 20  
  
<210> SEQ ID NO 15  
<211> LENGTH: 18  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ESR1 LAMP-1 F3  
  
<400> SEQUENCE: 15  
  
agagctgccca acctttgg 18  
  
<210> SEQ ID NO 16  
<211> LENGTH: 19  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ESR1 LAMP-1 B3  
  
<400> SEQUENCE: 16  
  
tgaaccagct ccctgtctg 19  
  
<210> SEQ ID NO 17  
<211> LENGTH: 40  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ESR1 LAMP-1 FIP  
  
<400> SEQUENCE: 17  
  
ggcactgacc atctggtcgg aagcccgctc atgatcaaac 40  
  
<210> SEQ ID NO 18  
<211> LENGTH: 40  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ESR1 LAMP-1 BIP  
  
<400> SEQUENCE: 18  
  
ttgttggatg ctgagccccc cccatcatcg aagcttcact 40  
  
<210> SEQ ID NO 19  
<211> LENGTH: 22  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ESR1 LAMP-1 LF  
  
<400> SEQUENCE: 19  
  
gccaggtgt tcttcttaga gc 22  
  
<210> SEQ ID NO 20  
<211> LENGTH: 25  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ESR1 LAMP-1 LB

---

-continued

---

&lt;400&gt; SEQUENCE: 20

actctattcc gagtatgatc ctacc

25

&lt;210&gt; SEQ ID NO 21

&lt;211&gt; LENGTH: 16

&lt;212&gt; TYPE: DNA

&lt;213&gt; ORGANISM: Artificial Sequence

&lt;220&gt; FEATURE:

&lt;223&gt; OTHER INFORMATION: Primer GAPDH LAMP-2 F3

&lt;400&gt; SEQUENCE: 21

gctgccaagg ctgtgg

16

&lt;210&gt; SEQ ID NO 22

&lt;211&gt; LENGTH: 18

&lt;212&gt; TYPE: DNA

&lt;213&gt; ORGANISM: Artificial Sequence

&lt;220&gt; FEATURE:

&lt;223&gt; OTHER INFORMATION: Primer GAPDH LAMP-2 B3

&lt;400&gt; SEQUENCE: 22

cccaggatgc ccttgagg

18

&lt;210&gt; SEQ ID NO 23

&lt;211&gt; LENGTH: 41

&lt;212&gt; TYPE: DNA

&lt;213&gt; ORGANISM: Artificial Sequence

&lt;220&gt; FEATURE:

&lt;223&gt; OTHER INFORMATION: Primer GAPDH LAMP-2 FIP

&lt;400&gt; SEQUENCE: 23

gttggcagtg gggacacgga acaagggtcat ccctgagctg a

41

&lt;210&gt; SEQ ID NO 24

&lt;211&gt; LENGTH: 38

&lt;212&gt; TYPE: DNA

&lt;213&gt; ORGANISM: Artificial Sequence

&lt;220&gt; FEATURE:

&lt;223&gt; OTHER INFORMATION: Primer GAPDH LAMP-2 BIP

&lt;400&gt; SEQUENCE: 24

tgtcagtggt ggacctgacc tgtccgacgc ctgcttca

38

&lt;210&gt; SEQ ID NO 25

&lt;211&gt; LENGTH: 18

&lt;212&gt; TYPE: DNA

&lt;213&gt; ORGANISM: Artificial Sequence

&lt;220&gt; FEATURE:

&lt;223&gt; OTHER INFORMATION: Primer GAPDH LAMP-2 LF

&lt;400&gt; SEQUENCE: 25

ggccatgcca gtgagctt

18

&lt;210&gt; SEQ ID NO 26

&lt;211&gt; LENGTH: 25

&lt;212&gt; TYPE: DNA

&lt;213&gt; ORGANISM: Artificial Sequence

&lt;220&gt; FEATURE:

&lt;223&gt; OTHER INFORMATION: Primer GAPDH LAMP-2 LB

&lt;400&gt; SEQUENCE: 26

cgtctagaaa aacctgccaa atatg

25

---

-continued

---

<210> SEQ ID NO 27  
<211> LENGTH: 17  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ACTB 4 B3-SNP

<400> SEQUENCE: 27

ggctggaaga gtgccgc

17

<210> SEQ ID NO 28  
<211> LENGTH: 18  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ACTB 4 F3

<400> SEQUENCE: 28

gcgggtacag cttcacca

18

<210> SEQ ID NO 29  
<211> LENGTH: 42  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ACTB 4 FIP

<400> SEQUENCE: 29

cgtaggcac tcttgctcga aggggaaatc gtgcgtgaca tt

42

<210> SEQ ID NO 30  
<211> LENGTH: 38  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ACTB 4 BIP

<400> SEQUENCE: 30

gcttccagct cctccctgga ccgctcattg ccaatggt

38

<210> SEQ ID NO 31  
<211> LENGTH: 20  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ACTB 4 LF

<400> SEQUENCE: 31

acgtagcaca gcttctcctt

20

<210> SEQ ID NO 32  
<211> LENGTH: 19  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ACTB 4 LB

<400> SEQUENCE: 32

gaagagctac gagctgcct

19

<210> SEQ ID NO 33  
<211> LENGTH: 17

---

-continued

---

<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Primer ACTB 4 B3-Sink  
  
<400> SEQUENCE: 33  
gcggcactct tccagcc 17  
  
<210> SEQ ID NO 34  
<211> LENGTH: 30  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Reporter RepF  
  
<400> SEQUENCE: 34  
cgagtgtgc gtatgacaag ggctagcgtt 30  
  
<210> SEQ ID NO 35  
<211> LENGTH: 30  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Reporter RepF-HEX  
  
<400> SEQUENCE: 35  
cgagtgtgc gtatgacaag ggctagcgtt 30  
  
<210> SEQ ID NO 36  
<211> LENGTH: 22  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Reporter RepQ  
  
<400> SEQUENCE: 36  
cccttgatc acgcagcact cg 22  
  
<210> SEQ ID NO 37  
<211> LENGTH: 30  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Reporter RepF2-AF647  
  
<400> SEQUENCE: 37  
cgccgcgtcc tgatctaact gactgactgc 30  
  
<210> SEQ ID NO 38  
<211> LENGTH: 22  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Reporter RepQ2  
  
<400> SEQUENCE: 38  
tcagttagat caggacgcgg cg 22  
  
<210> SEQ ID NO 39  
<211> LENGTH: 60  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: KRT19 -> Rep Transducer Gate

-continued

---

<400> SEQUENCE: 39

cgagtgtctgc gtatgacaag ggctagcggt atgctacgag cgacctcccg gttcaattct 60

<210> SEQ ID NO 40

<211> LENGTH: 30

<212> TYPE: DNA

<213> ORGANISM: Artificial Sequence

<220> FEATURE:

<223> OTHER INFORMATION: KRT19 -> Rep Transducer Output

<400> SEQUENCE: 40

aacgctagcc cttgtcatac gcagcactcg 30

<210> SEQ ID NO 41

<211> LENGTH: 58

<212> TYPE: DNA

<213> ORGANISM: Artificial Sequence

<220> FEATURE:

<223> OTHER INFORMATION: VIM -> Rep Transducer Gate

<400> SEQUENCE: 41

cgagtgtctgc gtatgacaag ggctagcggt atgctacgtc caggaagcgc accttgctc 58

<210> SEQ ID NO 42

<211> LENGTH: 30

<212> TYPE: DNA

<213> ORGANISM: Artificial Sequence

<220> FEATURE:

<223> OTHER INFORMATION: VIM -> Rep Transducer Output

<400> SEQUENCE: 42

aacgctagcc cttgtcatac gcagcactcg 30

<210> SEQ ID NO 43

<211> LENGTH: 88

<212> TYPE: DNA

<213> ORGANISM: Artificial Sequence

<220> FEATURE:

<223> OTHER INFORMATION: KRT19 AND VIM Strand 1

<400> SEQUENCE: 43

cgagtgtctgc gtatgacaag ggctagcggt atgctacgtc caggaagcgc accttgctcat 60

gctacgagcg acctcccggt tcaattct 88

<210> SEQ ID NO 44

<211> LENGTH: 88

<212> TYPE: DNA

<213> ORGANISM: Artificial Sequence

<220> FEATURE:

<223> OTHER INFORMATION: KRT19 AND VIM Strand 2

<400> SEQUENCE: 44

cgagtgtctgc gtatgacaag ggctagcggt atgctacgag cgacctcccg gttcaattct 60

atgctacgtc caggaagcgc accttgctc 88

<210> SEQ ID NO 45

<211> LENGTH: 88

<212> TYPE: DNA

<213> ORGANISM: Artificial Sequence

<220> FEATURE:

<223> OTHER INFORMATION: KRT19 OR VIM Gate

-continued

---

<400> SEQUENCE: 45

cgagtgtctgc gtatgacaag ggctagcggt atgctacgtc caggaagcgc accttgatcat 60  
gctacgagcg acctcccggt tcaattct 88

<210> SEQ ID NO 46

<211> LENGTH: 30

<212> TYPE: DNA

<213> ORGANISM: Artificial Sequence

<220> FEATURE:

<223> OTHER INFORMATION: KRT19 OR VIM Output

<400> SEQUENCE: 46

aacgctagcc ctgttcatac gcagcactcg 30

<210> SEQ ID NO 47

<211> LENGTH: 20

<212> TYPE: DNA

<213> ORGANISM: Artificial Sequence

<220> FEATURE:

<223> OTHER INFORMATION: VIM F1

<400> SEQUENCE: 47

gacaaggtgc gcttcctgga 20

<210> SEQ ID NO 48

<211> LENGTH: 22

<212> TYPE: DNA

<213> ORGANISM: Artificial Sequence

<220> FEATURE:

<223> OTHER INFORMATION: KRT19 F1

<400> SEQUENCE: 48

agaattgaac cgggaggtcg ct 22

<210> SEQ ID NO 49

<211> LENGTH: 60

<212> TYPE: DNA

<213> ORGANISM: Artificial Sequence

<220> FEATURE:

<223> OTHER INFORMATION: KRT19 Transducer 2 Gate

<400> SEQUENCE: 49

ctgctctcac ggaggcgac cggttaagggt catcgatgag cgacctcccg gttcaattct 60

<210> SEQ ID NO 50

<211> LENGTH: 58

<212> TYPE: DNA

<213> ORGANISM: Artificial Sequence

<220> FEATURE:

<223> OTHER INFORMATION: VIM Transducer 2 Gate

<400> SEQUENCE: 50

ctgctctcac ggaggcgac cggttaagggt catcgatgac caggaagcgc accttgatc 58

<210> SEQ ID NO 51

<211> LENGTH: 35

<212> TYPE: DNA

<213> ORGANISM: Artificial Sequence

<220> FEATURE:

<223> OTHER INFORMATION: KRT19/VIM Transducer 2 Output

<400> SEQUENCE: 51

-continued

---

cgatgaccct taccggtgcg cctccgtgag agcag 35

<210> SEQ ID NO 52  
<211> LENGTH: 45  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: KRT19 AND VIM Gate

<400> SEQUENCE: 52

cgagtgtgc gtatgacaag ggctagcgtt atgctgctct caccg 45

<210> SEQ ID NO 53  
<211> LENGTH: 30  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: KRT19 AND VIM Out

<400> SEQUENCE: 53

aacgctagcc cttgtcatac gcagcactcg 30

<210> SEQ ID NO 54  
<211> LENGTH: 50  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: KRT19 AND VIM Threshold

<400> SEQUENCE: 54

ccgctggtga tcactctgct ctcacggagg cgcaccgga agggtcacg 50

<210> SEQ ID NO 55  
<211> LENGTH: 60  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: KRT19 Transducer 3 Gate

<400> SEQUENCE: 55

cgcgatccga gtgctgcgta tgacaagggc tagcgtttgc cggaagcgac ctcccggttc 60

<210> SEQ ID NO 56  
<211> LENGTH: 60  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: VIM Transducer 3 Gate

<400> SEQUENCE: 56

cgcgatccga gtgctgcgta tgacaagggc tagcgtttgc cggatccagg aagcgcacct 60

<210> SEQ ID NO 57  
<211> LENGTH: 44  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: KRT19/VIM Transducer 3 Output

<400> SEQUENCE: 57

tccggcaaac gctagccctt gtcatacgca gcaactcggat cgcg 44

---

-continued

---

<210> SEQ ID NO 58  
<211> LENGTH: 60  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: VIM Transducer 4 Gate

<400> SEQUENCE: 58

ccatcgcgga gacacggaca tcgttaaggc agcctgtagg cagcctccag gaagcgcacc 60

<210> SEQ ID NO 59  
<211> LENGTH: 60  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: KRT19 Transducer 4 Gate

<400> SEQUENCE: 59

gtgtctccgc gatggcgagt gctgcgtatg acaagggcta gcgttagcga cctcccgggt 60

<210> SEQ ID NO 60  
<211> LENGTH: 45  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: KRT19 AND-NOT VIM Inhibitor

<400> SEQUENCE: 60

ggctgcctac aggctgcctt aacgatgtcc gtgtctccgc gatgg 45

<210> SEQ ID NO 61  
<211> LENGTH: 45  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: KRT19 AND-NOT VIM Output

<400> SEQUENCE: 61

aacgctagcc cttgtcatac gcagcactcg ccatcgcgga gacac 45

<210> SEQ ID NO 62  
<211> LENGTH: 60  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: KRT19 -> Rep2 Transducer Gate

<400> SEQUENCE: 62

gtgtctccgc gatggcgccg cgtcctgata taactgactg actgcagcga cctcccgggt 60

<210> SEQ ID NO 63  
<211> LENGTH: 45  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: KRT19 -> Rep2 Transducer Output

<400> SEQUENCE: 63

gcagtcagtc agttagatca ggacgcggcg ccatcgcgga gacac 45

<210> SEQ ID NO 64  
<211> LENGTH: 55  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence



---

-continued

---

<220> FEATURE:  
<223> OTHER INFORMATION: CK19 Sensor

<400> SEQUENCE: 64

gagttaccag cctggagttc tcaatgggtg cctggtaact cactgaccga gctaa 55

<210> SEQ ID NO 65  
<211> LENGTH: 67  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Oligo H1

<400> SEQUENCE: 65

cgacatctaa cctagctcac tgaccgagct aagctgttct cgattagctc ggtcagtgag 60

ttaccag 67

<210> SEQ ID NO 66  
<211> LENGTH: 46  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Oligo H2

<400> SEQUENCE: 66

gctgtttctcg atcactgacc gagctaactcg agaacagctt agctcg 46

<210> SEQ ID NO 67  
<211> LENGTH: 67  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Oligo H3

<400> SEQUENCE: 67

gtcagtgagc taggttagat gtcgccatgt gtagacgaca tctaacctag ccttgtcat 60

agagcac 67

<210> SEQ ID NO 68  
<211> LENGTH: 46  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Oligo H4

<400> SEQUENCE: 68

agatgtcgtc tacacatggc gacatctaac ctagcccatg tgtaga 46

<210> SEQ ID NO 69  
<211> LENGTH: 27  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence  
<220> FEATURE:  
<223> OTHER INFORMATION: Oligo RepF-CHA

<400> SEQUENCE: 69

cgagtgtctct atgacaaggg ctaggtt 27

<210> SEQ ID NO 70  
<211> LENGTH: 20  
<212> TYPE: DNA  
<213> ORGANISM: Artificial Sequence

-continued

&lt;220&gt; FEATURE:

&lt;223&gt; OTHER INFORMATION: Oligo RepQ-CHA

&lt;400&gt; SEQUENCE: 70

cccttgatcat agagcactcg 20

&lt;210&gt; SEQ ID NO 71

&lt;211&gt; LENGTH: 21

&lt;212&gt; TYPE: DNA

&lt;213&gt; ORGANISM: Artificial Sequence

&lt;220&gt; FEATURE:

&lt;223&gt; OTHER INFORMATION: Oligo CK19 Input

&lt;400&gt; SEQUENCE: 71

gccaccattg agaactccag g 21

&lt;210&gt; SEQ ID NO 72

&lt;211&gt; LENGTH: 1496

&lt;212&gt; TYPE: DNA

&lt;213&gt; ORGANISM: Artificial Sequence

&lt;220&gt; FEATURE:

&lt;223&gt; OTHER INFORMATION: KRT19 gBlock

&lt;400&gt; SEQUENCE: 72

cagggtctcgt atgagatata cgcacctgac accatttcctc ccttcccccc tccaccggcc 60

gcgggcataa aaggcgccag gtgagggcct cgcgcctcct cccgcgaatc gcagcttctg 120

agaccagggt tgcctccgtcc gtgctccgcc tcgcatgac ttctacagc tatcgccagt 180

cgtcgccac gtcgtccttc ggaggcctgg gcggcggtc cgtgcgtttt gggcgggggg 240

tcgcttttg cgcgcccagc attcacgggg gctccggcgg cgcggcgta tccgtgtcct 300

ccgcccgtt tgtgtcctcg tcctcctcgg gggcctacgg cggcggtac ggcggcgtcc 360

tgaccgcgtc cgacgggctg ctggcgggca acgagaagct aaccatgcag aacctcaacg 420

accgcctggc ctctacctg gacaaggctg gcgccttggg ggcggccaac ggcgagctag 480

aggtgaagat ccgagctgg taccagaagc aggggcctgg gcctccgc gactacagcc 540

actactacac gaccatccag gacctgcggg acaagattct tggtgccacc attgagaact 600

ccaggattgt cctgcagatc gacaatgccc gtctggctgc agatgacttc cgaaccaagt 660

ttgagacgga acaggctctg cgcagagcgc tggaggccga catcaacggc ctgcgcaggg 720

tgctggatga gctgacctg gccaggaccg acctggagat gcagatcga ggcctgaagg 780

aagagctggc ctacctgaag aagaacctg agggaggaaat cagtacgctg aggggccaag 840

tgaggaggca ggtcagtggt gaggtggatt ccgctccggg caccgatctc gccaagatcc 900

tgagtacat gcaagccaa tatgaggtca tggccgagca gaaccggaag gatgctgaag 960

cctgtttcac cagccggact gaagaattga accgggaggt cgtggccac acggagcagc 1020

tccagatgag caggctccag gttactgacc tgcggcgac ccttcagggt cttgagattg 1080

agctgcagtc acagctgagc atgaaagctg ccttgaaga cacttgga gaaacggagg 1140

cgcgctttgg agcccagctg gcgcataatc aggcgctgat cagcgggtatt gaagcccagc 1200

tgggcgatgt gcgagctgat agtgagcggc agaatacagg gtaccagcgg ctcatggaca 1260

tcaagtgcgc gctggagcag gagattgcca cctaccgag cctgctcag ggacaggaag 1320

atcactacaa caatttgtct gcctccaagg tcctctgagg cagcaggtc tggggcttct 1380

gctgtccttt ggagggtgtc ttctgggtag agggatggga aggaaggagc ccttaccccc 1440

-continued

---

```

ggctcttctc ctgacctgcc aataaaaatt tatggtccaa gggtagcgga gaccac      1496

<210> SEQ ID NO 73
<211> LENGTH: 706
<212> TYPE: DNA
<213> ORGANISM: Artificial Sequence
<220> FEATURE:
<223> OTHER INFORMATION: VIM gBlock

<400> SEQUENCE: 73

caggctctcgt atgccaccca caccacccgc gccctcgttc gcctcttctc cgggagccag      60
tccgcgccac cgcgcgcgcc caggccatcg ccacctccg cagccatgtc caccaggtcc     120
gtgtcctcgt cctcctaccg caggatgttc ggcggcccg gcaccgcgag ccggccgagc     180
tccagccgga gctacgtgac tacgtccacc cgcacctaca gcctgggcag cgcgtgcgc     240
cccagcacca gccgcagcct ctacgcctcg tcccggggcg gcgtgtatgc cagcgcctcc     300
tgtgccgtgc gcctgcggag cagcgtgccc ggggtgcggc tcctgcagga ctcggtggac     360
ttctcgctgg ccgacgccat caacaccgag ttcaagaaca cccgcaccaa cgagaaggtg     420
gagctgcagg agctgaatga ccgcttcgcc aactacatcg acaaggtgcg ctctctggag     480
cagcagaata agatcctgct ggccgagctc gagcagctca agggccaagg caagtcgcgc     540
ctgggggacc ttacagagga ggagatgcgg gagctgcgcc ggcaggtgga ccagctaacc     600
aacgacaaag cccgcgtcga ggtggagcgc gacaacctgg ccgaggacat catgcgcctc     660
cgggagaaat tgcaggagga gatgcttcag agatgagcga gaccac      706

```

---

1. A method of profiling a nucleic acid composition of a single cell comprising:

- isolating the single cell in a liquid droplet;
- lysing the single cell in the liquid droplet to release template nucleic acid from the cell;
- amplifying the template nucleic acid in the liquid droplet to generate amplified nucleic acid; and
- detecting the amplified nucleic acid in the liquid droplet.

2. The method of claim 1, wherein the isolating comprises isolating the cell in an aqueous liquid droplet suspended in a water-immiscible medium.

3. The method of claim 1, wherein the isolating comprises isolating the cell in the liquid droplet with a lysis reagent, a DNA polymerase, amplification primers, deoxynucleotide triphosphates, an RNase inhibitor, a nucleic acid logic gate, and a reporter.

4-20. (canceled)

21. The method of claim 1, wherein the detecting comprises profiling the amplified nucleic acid by performing a molecular computation with a polymerase-dependent nucleic acid logic gate.

22. The method of claim 21, wherein the polymerase-dependent logic gate comprises an output strand annealed to a gate strand, the logic gate being configured to release the output strand from the gate strand in the presence of an input strand and a DNA polymerase, wherein:

- the output strand anneals to an output-strand annealing portion of the gate strand and does not anneal to an output-strand non-annealing portion of the gate strand,

wherein the output-strand annealing portion is closer to a 5' end of the gate strand than the output-strand non-annealing portion;

the input strand anneals to an input-strand annealing portion of the gate strand and does not anneal to an input-strand non-annealing portion of the gate strand, wherein the input-strand annealing portion is closer to a 3' end of the gate strand than the input-strand non-annealing portion; and

annealing of the input strand to the gate strand and polymerase-mediated extension of the input strand along the gate strand to form an extended input strand are together necessary and sufficient for release of the output strand from the gate strand.

23. The method of claim 22, wherein the output-strand annealing portion and the input-strand non-annealing portion at least partially overlap, and wherein the input-strand annealing portion and the output-strand non-annealing portion at least partially overlap.

24-31. (canceled)

32. The method of claim 22, wherein:

the output strand comprises a reporter-gate annealing portion that anneals to either a reporter strand or a quencher strand of a reporter gate.

33. The method of claim 32, wherein:

the output strand further comprises a second-input-strand annealing portion that anneals to a second input strand, wherein the second-input-strand annealing portion is closer to a 3' end of the output strand than the reporter-gate annealing portion.

**34.** The method of claim **22**, wherein the logic gate further comprises a threshold strand configured to anneal to the output strand.

**35-36.** (canceled)

**37.** The method of claim **22**, wherein the input strand is comprised by the amplified nucleic acid.

**38.** The method of claim **22**, wherein the input strand is an output strand from a second logic gate configured to detect a second input strand.

**39.** The method of claim **22**, wherein the output strand is an input strand for a second logic gate.

**40.** The method of claim **22**, wherein the output strand is an input strand for a reporter gate.

**41-42.** (canceled)

**43.** The method of claim **21**, wherein a substantially constant temperature is maintained throughout and between each of the lysing, the amplifying, and the profiling the amplified nucleic acid.

**44-45.** (canceled)

**46.** The method of claim **1**, wherein the detecting comprises detecting a single nucleotide polymorphism in the nucleic acid composition of the single cell.

**47.** The method of claim **1**, wherein the isolating, the lysing, the amplifying, and the detecting all occur in a single, continuous network of channels.

**48.** The method of claim **1**, wherein the isolating occurs prior to the lysing, the lysing occurs prior to the amplifying, and the amplifying occurs prior to the detecting.

**49.** (canceled)

**50.** The method of claim **1**, wherein the lysing, the amplifying, and the detecting all occur without diluting the liquid droplet, adding additional reagents to the liquid droplet, and/or removing reagents or liquid from the liquid droplet after the isolating.

**51.** A polymerase-dependent logic gate comprising an output strand annealed to a gate strand, the logic gate being configured to release the output strand from the gate strand in the presence of an input strand and a DNA polymerase, wherein:

the output strand anneals to an output-strand annealing portion of the gate strand and does not anneal to an output-strand non-annealing portion of the gate strand, wherein the output-strand annealing portion is closer to a 5' end of the gate strand than the output-strand non-annealing portion;

the input strand anneals to an input-strand annealing portion of the gate strand and does not anneal to an input-strand non-annealing portion of the gate strand, wherein the input-strand annealing portion is closer to a 3' end of the gate strand than the input-strand non-annealing portion; and

annealing of the input strand to the gate strand and polymerase-mediated extension of the input strand along the gate strand to form an extended input strand are together necessary and sufficient for release of the output strand from the gate strand.

**52.** A system for performing the method of claim **1**.

\* \* \* \* \*